

## Luminaire Photograph



Light Output Ratio:	79.0%	
Luminaire Power:	8.239 W	
SHR Nominal:	0.75	Calculated using the TM5
SHR Maximum:	0.85	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2023-8-8

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084C 50R  
DRIVER: 9290 028 088 350mA  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

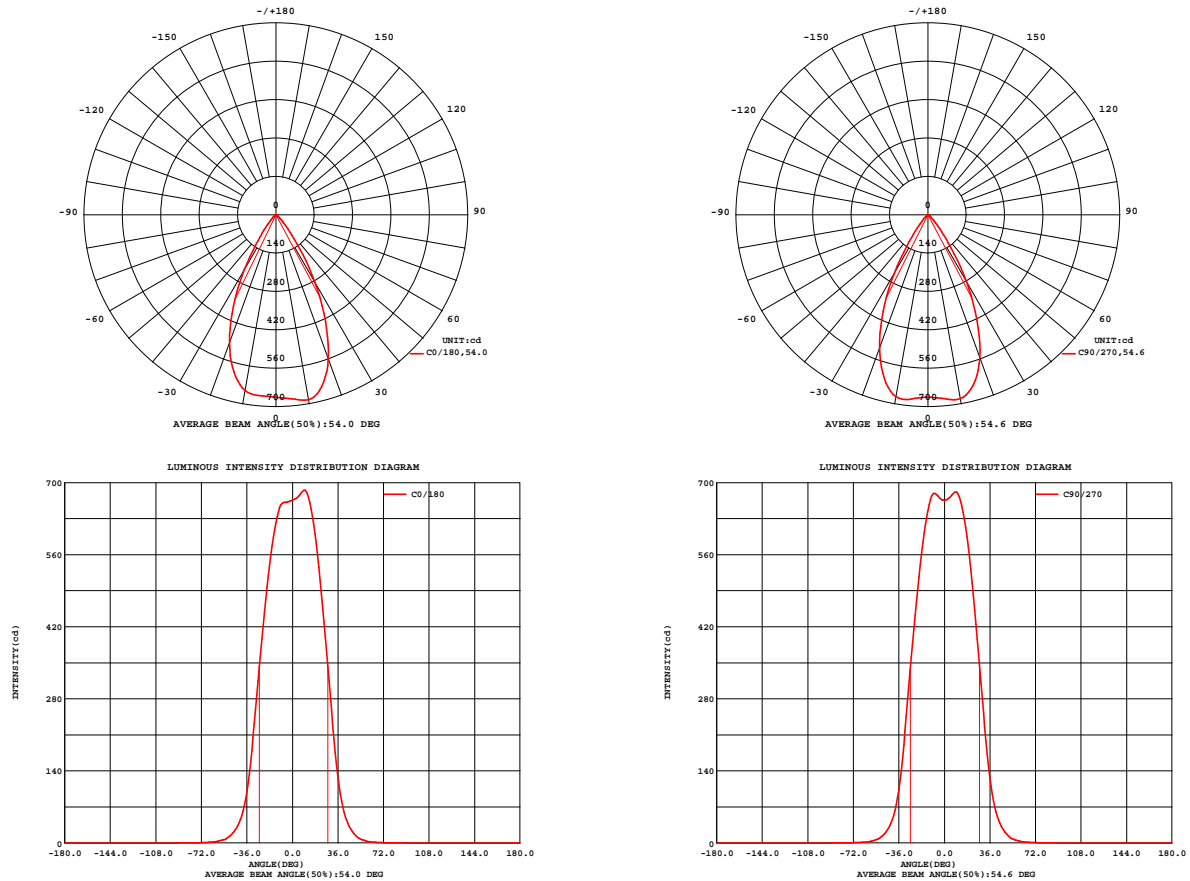


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2023-8-8

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084C 50R  
DRIVER: 9290 028 088 350mA  
30minutes warm-up

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.97V I:0.0398A P:8.2386W PF:0.9377 Freq:49.99Hz Lamp Flux:685.66x1 lm		
NAME: 2214.411-1-ACOT-96	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2308081002
MFR.: RISE	SUR.: 0.0025m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 65.72 lm/W			
MODEL	CREE	I <sub>max</sub> (cd)	711.5	S/MH(C0/180)	0.79
NOMINAL POWER(W)	8	LOR(%)	79.0	S/MH(C90/270)	0.81
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	541.46	η UP,DN(C0-180)	0.0,41.2
NOMINAL FLUX(lm)	685.66	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,37.8
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	220	η down(%)	79.0	CIBSE SHR MAX	0.85

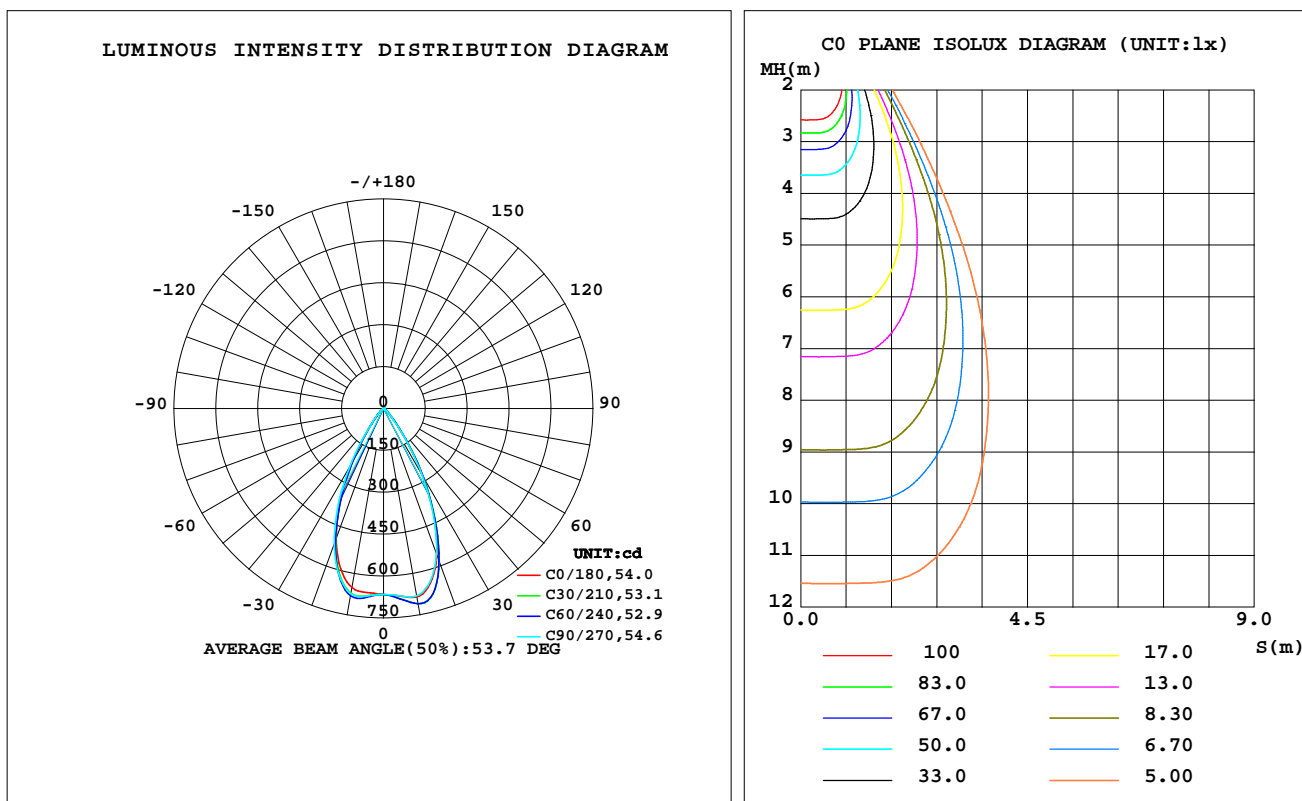

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-8-8

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084C 50R  
DRIVER: 9290 028 088 350mA  
30minutes warm-up

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	685.3	709.2	681.2	657.1	651.0	676.3	673.6	670.5	0- 10	64.39	64.39	11.9,9.39
20	558.8	583.0	554.4	513.2	496.2	501.8	516.8	525.6	10- 20	173.6	238.0	44,34.7
30	285.8	288.5	280.6	258.5	231.7	225.9	246.6	270.7	20- 30	181.2	419.2	77.4,61.1
40	69.73	73.76	69.16	61.21	52.84	50.01	53.56	61.81	30- 40	88.08	507.3	93.7,74
50	14.56	18.25	15.31	15.63	11.96	13.31	11.22	15.25	40- 50	24.62	532.0	98.2,77.6
60	2.900	4.372	3.358	4.014	2.776	3.435	2.385	3.666	50- 60	6.838	538.8	99.5,78.6
70	0.8418	1.100	0.9518	1.134	0.8532	0.9761	0.7211	0.9587	60- 70	1.879	540.7	99.9,78.9
80	0.2474	0.3373	0.3005	0.3495	0.2926	0.2998	0.2420	0.2752	70- 80	0.5898	541.3	100,78.9
90	0	0	0	0	0	0	0	0	80- 90	0.1998	541.5	100,79
100	0	0	0	0	0	0	0	0	90-100	0	541.5	100,79
110	0	0	0	0	0	0	0	0	100-110	0	541.5	100,79
120	0	0	0	0	0	0	0	0	110-120	0	541.5	100,79
130	0	0	0	0	0	0	0	0	120-130	0	541.5	100,79
140	0	0	0	0	0	0	0	0	130-140	0	541.5	100,79
150	0	0	0	0	0	0	0	0	140-150	0	541.5	100,79
160	0	0	0	0	0	0	0	0	150-160	0	541.5	100,79
170	0	0	0	0	0	0	0	0	160-170	0	541.5	100,79
180	0	0	0	0	0	0	0	0	170-180	0	541.5	100,79
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3 °C  
 Operators:zoe  
 Test Date:2023-8-8

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:3.160m [K=1.0000]  
 Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
 LENS: PM-1084C 50R  
 DRIVER: 9290 028 088 350mA  
 30minutes warm-up

### LUMINANCE LIMITATION CURVES

Test:U:219.97V I:0.0398A P:8.2386W PF:0.9377 Freq:49.99Hz  
Lamp Flux:685.66x1 lm

NAME: 2214.411-1-ACOT-96

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2308081002

MFR.: RISE

SUR.: 0.0025m2

Shielding Angle:

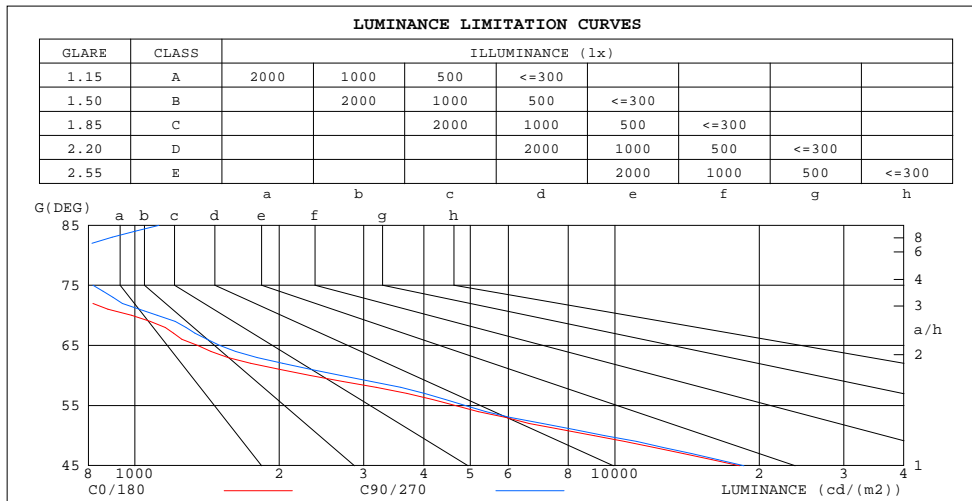

LUMINANCE cd/(m2)		
G(180)	C0/180	C90/270
85	854	1123
80	570	692
75	687	818
70	984	1113
65	1352	1503
60	2320	2687
55	4658	4888
50	9059	9530
45	18180	18590

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-8-8

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084C 50R  
DRIVER: 9290 028 088 350mA  
30minutes warm-up

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:219.97V I:0.0398A P:8.2386W PF:0.9377 Freq:49.99Hz  
Lamp Flux:685.66x1 lm

NAME: 2214.411-1-ACOT-96

TYPE:

WEIGHT:

SPEC.: 3000K

DIM.:


SERIAL No.: 2308081002

MFR.: RISE

SUR.: 0.0025m2

Shielding Angle:

$\rho_{cc}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	.94	.94	.94	.92	.92	.92	.88	.88	.88	.84	.84	.84	.81	.81	.81	.79
1.0	.88	.86	.84	.86	.84	.83	.83	.81	.80	.80	.79	.78	.77	.76	.76	.74
2.0	.82	.79	.76	.81	.78	.75	.78	.76	.74	.76	.74	.72	.73	.72	.71	.69
3.0	.77	.73	.70	.76	.72	.69	.73	.71	.68	.72	.69	.67	.70	.68	.66	.65
4.0	.72	.68	.65	.71	.67	.64	.69	.66	.63	.68	.65	.63	.66	.64	.62	.61
5.0	.68	.63	.60	.67	.63	.60	.65	.62	.59	.64	.61	.59	.63	.60	.58	.57
6.0	.64	.59	.56	.63	.59	.56	.62	.58	.55	.61	.58	.55	.60	.57	.55	.54
7.0	.60	.56	.52	.60	.55	.52	.59	.55	.52	.58	.54	.52	.57	.54	.51	.50
8.0	.57	.52	.49	.56	.52	.49	.56	.52	.49	.55	.51	.49	.54	.51	.49	.48
9.0	.54	.49	.46	.54	.49	.46	.53	.49	.46	.52	.49	.46	.52	.48	.46	.45
10.0	.51	.47	.44	.51	.47	.44	.50	.46	.44	.50	.46	.44	.49	.46	.44	.43

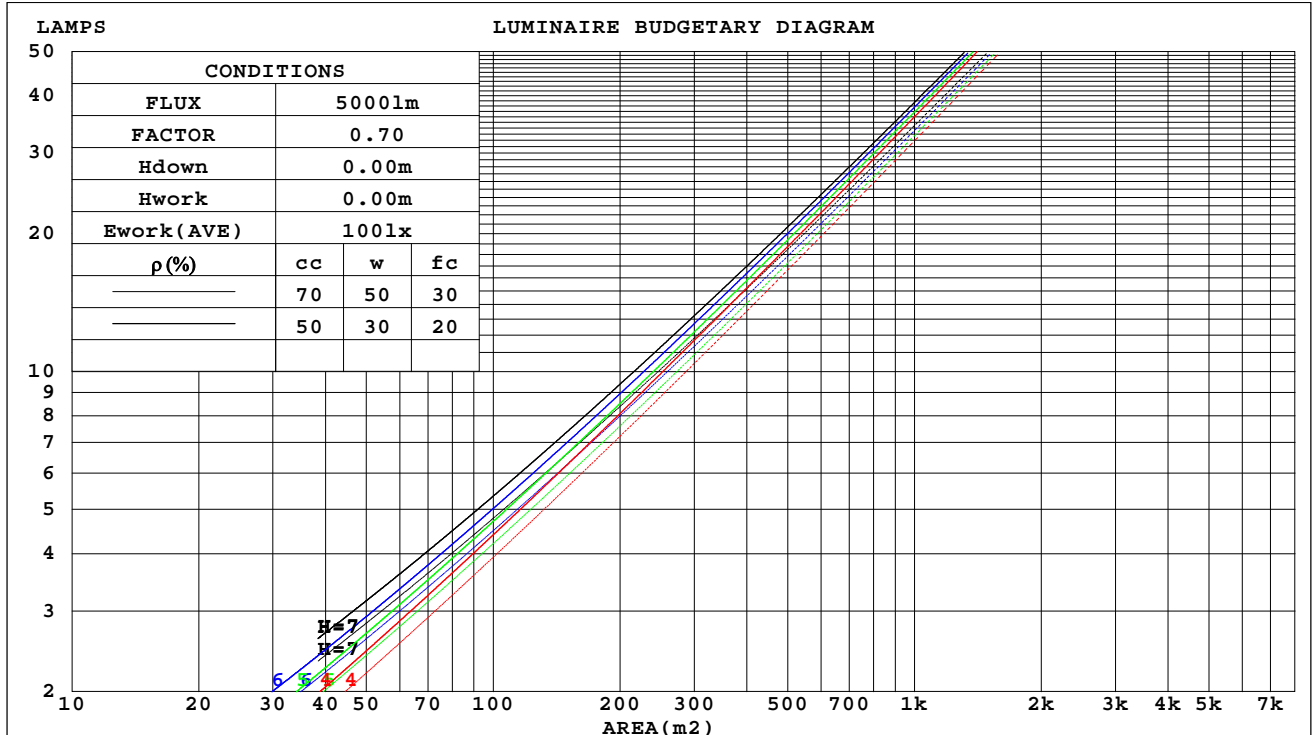

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-8-8

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084C 50R  
DRIVER: 9290 028 088 350mA  
30minutes warm-up

### WEC AND CCEC

Test:U:219.97V I:0.0398A P:8.2386W PF:0.9377 Freq:49.99Hz Lamp Flux:685.66x1 lm		
NAME: 2214.411-1-ACOT-96	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2308081002
MFR.: RISE	SUR.: 0.0025m2	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.136	.077	.025	.131	.075	.024	.121	.069	.022	.112	.065	.021	.103	.060	.019	
2.0	.130	.071	.022	.126	.069	.021	.117	.065	.020	.110	.061	.019	.102	.058	.018	
3.0	.124	.066	.020	.120	.064	.019	.113	.061	.019	.106	.058	.018	.100	.055	.017	
4.0	.118	.061	.018	.115	.060	.018	.108	.057	.017	.103	.055	.017	.097	.053	.016	
5.0	.112	.057	.017	.109	.056	.016	.104	.054	.016	.099	.052	.016	.095	.051	.015	
6.0	.107	.054	.015	.105	.053	.015	.100	.051	.015	.096	.050	.015	.092	.048	.014	
7.0	.102	.051	.014	.100	.050	.014	.096	.049	.014	.092	.047	.014	.089	.046	.014	
8.0	.098	.048	.013	.096	.047	.013	.092	.046	.013	.089	.045	.013	.086	.044	.013	
9.0	.094	.045	.013	.092	.045	.013	.089	.044	.012	.086	.043	.012	.083	.042	.012	
10.0	.090	.043	.012	.089	.043	.012	.086	.042	.012	.083	.041	.012	.080	.040	.012	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.150	.150	.150	.129	.129	.129	.088	.088	.088	.050	.050	.050	.016	.016	.016	
1.0	.135	.124	.115	.115	.107	.099	.079	.073	.068	.045	.042	.040	.015	.014	.013	
2.0	.123	.105	.090	.105	.090	.077	.072	.062	.054	.042	.036	.032	.013	.012	.010	
3.0	.113	.090	.071	.097	.077	.062	.066	.054	.043	.038	.031	.026	.012	.010	.008	
4.0	.104	.078	.058	.090	.067	.050	.062	.047	.035	.036	.028	.021	.011	.009	.007	
5.0	.097	.069	.048	.084	.059	.041	.058	.042	.029	.033	.024	.017	.011	.008	.006	
6.0	.091	.061	.040	.079	.053	.035	.054	.037	.025	.031	.022	.015	.010	.007	.005	
7.0	.086	.055	.034	.074	.048	.029	.051	.034	.021	.030	.020	.012	.010	.006	.004	
8.0	.082	.050	.029	.070	.044	.025	.049	.031	.018	.028	.018	.011	.009	.006	.004	
9.0	.078	.046	.025	.067	.040	.022	.046	.028	.015	.027	.017	.009	.009	.005	.003	
10.0	.074	.043	.022	.064	.037	.019	.044	.026	.014	.026	.015	.008	.008	.005	.003	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-8-8

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084C 50R  
DRIVER: 9290 028 088 350mA  
30minutes warm-up

## UGR(Unified Glare Rating) Table

Test:U:219.97V I:0.0398A P:8.2386W PF:0.9377 Freq:49.99Hz Lamp Flux:685.66x1 lm										
NAME: 2214.411-1-ACOT-96					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2308081002		
MFR.: RISE					SUR.: 0.0025m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.8	20.8	20.1	20.9	21.1	19.8	20.7	20.0	20.9	21.1
3H	19.7	20.5	19.9	20.7	20.9	19.7	20.5	19.9	20.7	20.9
4H	19.6	20.4	19.9	20.6	20.8	19.6	20.4	19.8	20.6	20.8
6H	19.5	20.3	19.8	20.5	20.8	19.5	20.2	19.8	20.5	20.7
8H	19.5	20.2	19.8	20.4	20.7	19.4	20.2	19.7	20.4	20.7
12H	19.4	20.1	19.8	20.4	20.7	19.4	20.1	19.7	20.4	20.6
4H 2H	19.6	20.4	19.9	20.6	20.9	19.6	20.4	19.9	20.6	20.8
3H	19.5	20.1	19.8	20.4	20.7	19.4	20.1	19.7	20.4	20.7
4H	19.4	20.0	19.7	20.3	20.6	19.3	20.0	19.7	20.3	20.6
6H	19.3	19.8	19.7	20.2	20.5	19.2	19.8	19.6	20.1	20.5
8H	19.2	19.7	19.6	20.1	20.5	19.2	19.7	19.6	20.1	20.4
12H	19.2	19.6	19.6	20.0	20.4	19.2	19.6	19.6	20.0	20.4
8H 4H	19.2	19.7	19.6	20.1	20.5	19.2	19.7	19.6	20.1	20.4
6H	19.1	19.6	19.6	19.9	20.4	19.1	19.5	19.5	19.9	20.3
8H	19.1	19.5	19.5	19.9	20.3	19.1	19.4	19.5	19.8	20.3
12H	19.0	19.3	19.5	19.8	20.3	19.0	19.3	19.5	19.8	20.2
12H 4H	19.2	19.6	19.6	20.0	20.4	19.1	19.6	19.6	20.0	20.4
6H	19.1	19.4	19.5	19.9	20.3	19.0	19.4	19.5	19.8	20.3
8H	19.0	19.3	19.5	19.8	20.3	19.0	19.3	19.5	19.8	20.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.1 / - 9.3					+ 3.1 / - 9.0				
1.5H	+ 5.0 / - 6.5					+ 4.9 / - 6.6				
2.0H	+ 5.2 / - 6.9					+ 5.2 / - 6.2				

CIE Pub.117, 685.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.3)  
Area: 0.0025 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-8-8

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084C 50R  
DRIVER: 9290 028 088 350mA  
30minutes warm-up



### UTILIZATION FACTORS TABLE

Test:U:219.97V I:0.0398A P:8.2386W PF:0.9377 Freq:49.99Hz Lamp Flux:685.66x1 lm		
NAME: 2214.411-1-ACOT-96	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2308081002
MFR.: RISE	SUR.: 0.0025m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	69	64	61	69	64	61	68	64	61	58
0.80	75	70	68	75	70	67	74	70	67	64
1.00	79	74	71	78	74	71	77	74	71	68
1.25	82	78	75	81	77	75	79	76	74	71
1.50	84	80	78	83	80	77	81	78	76	73
2.00	86	83	80	85	82	80	83	80	78	74
2.50	87	84	82	86	83	81	83	81	80	75
3.00	88	86	84	87	85	83	84	83	81	76
4.00	90	88	86	88	87	85	85	84	83	77
5.00	91	89	88	89	88	86	86	85	84	78
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-8-8

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084C 50R  
DRIVER: 9290 028 088 350mA  
30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:219.97V I:0.0398A P:8.2386W PF:0.9377 Freq:49.99Hz Lamp Flux:685.66x1 lm		
NAME: 2214.411-1-ACOT-96	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2308081002
MFR.: RISE	SUR.: 0.0025m2	Shielding Angle:

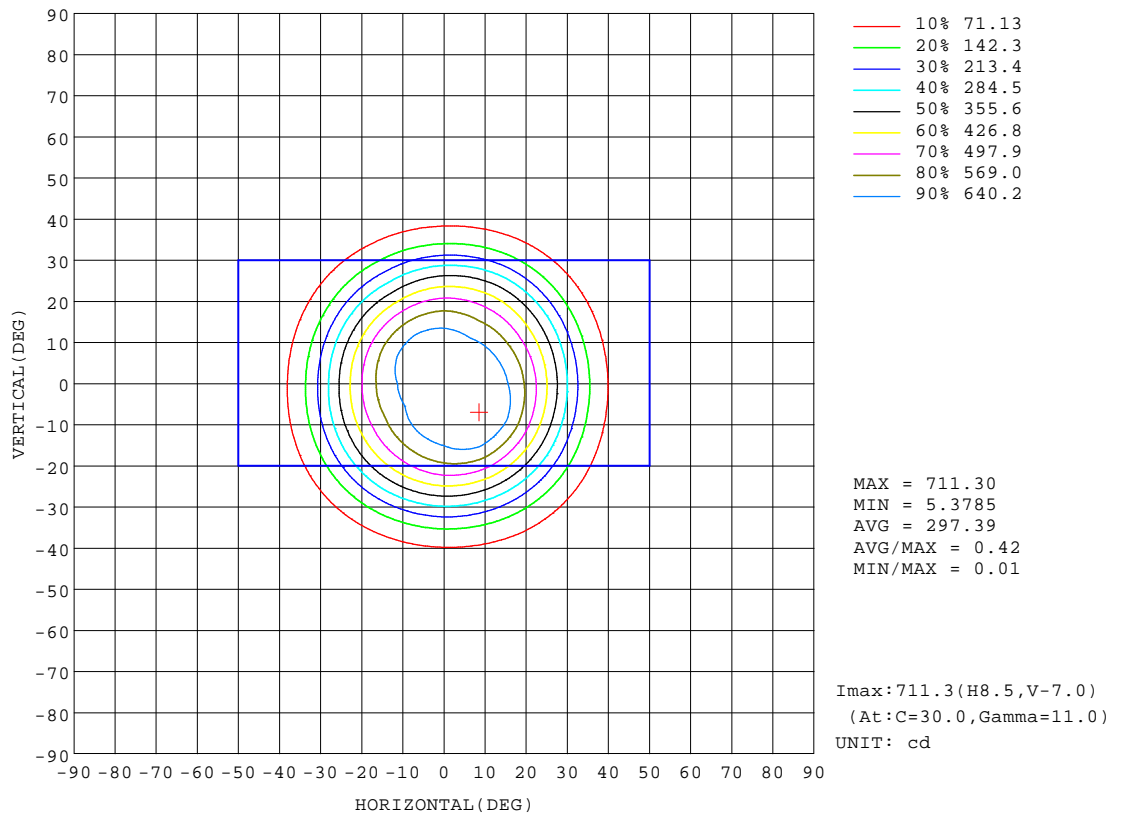


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-8-8

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084C 50R  
DRIVER: 9290 028 088 350mA  
30minutes warm-up

## AAI Figure

Test:U:219.97V I:0.0398A P:8.2386W PF:0.9377 Freq:49.99Hz Lamp Flux:685.66x1 lm		
NAME: 2214.411-1-ACOT-96	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2308081002
MFR.: RISE	SUR.: 0.0025m2	Shielding Angle:

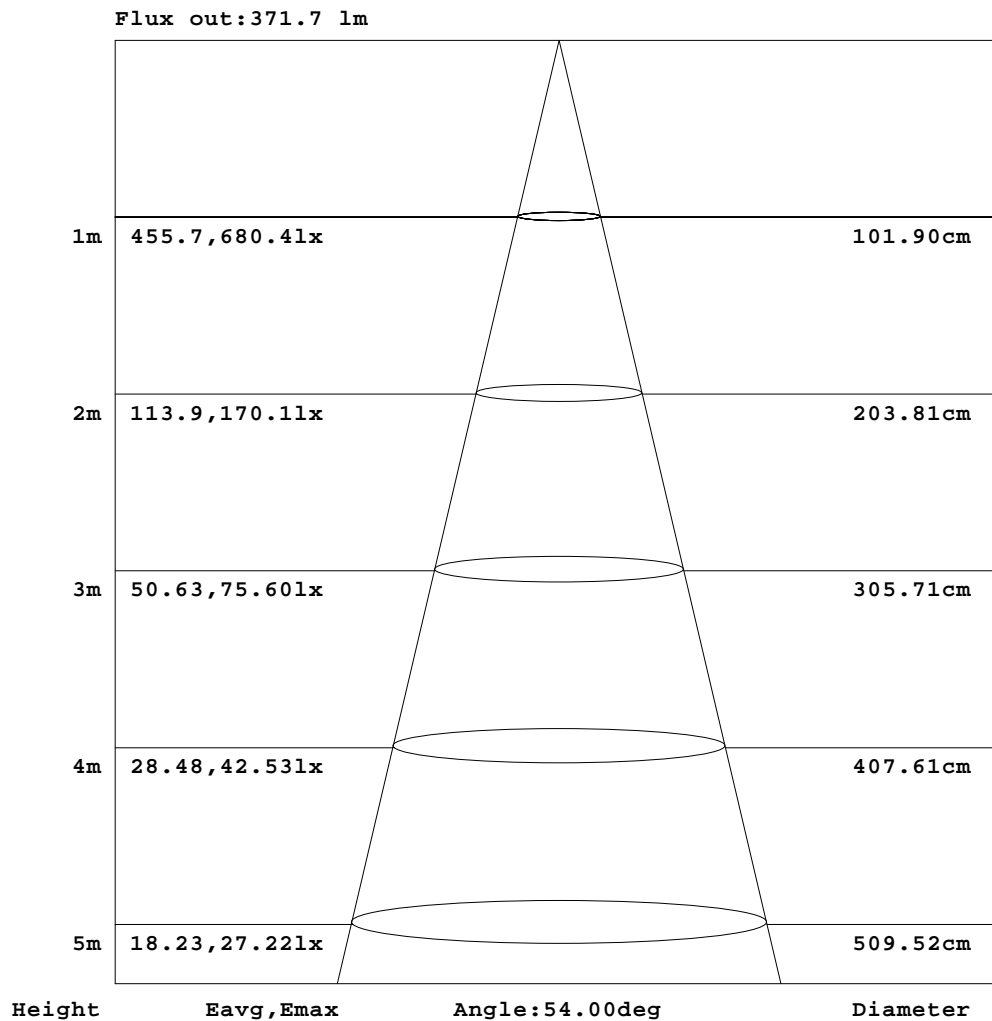


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2023-8-8

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084C 50R  
DRIVER: 9290 028 088 350mA  
30minutes warm-up

## ISOLUX DIAGRAM

Test:U:219.97V I:0.0398A P:8.2386W PF:0.9377 Freq:49.99Hz Lamp Flux:685.66x1 lm		
NAME: 2214.411-1-ACOT-96	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2308081002
MFR.: RISE	SUR.: 0.0025m2	Shielding Angle:

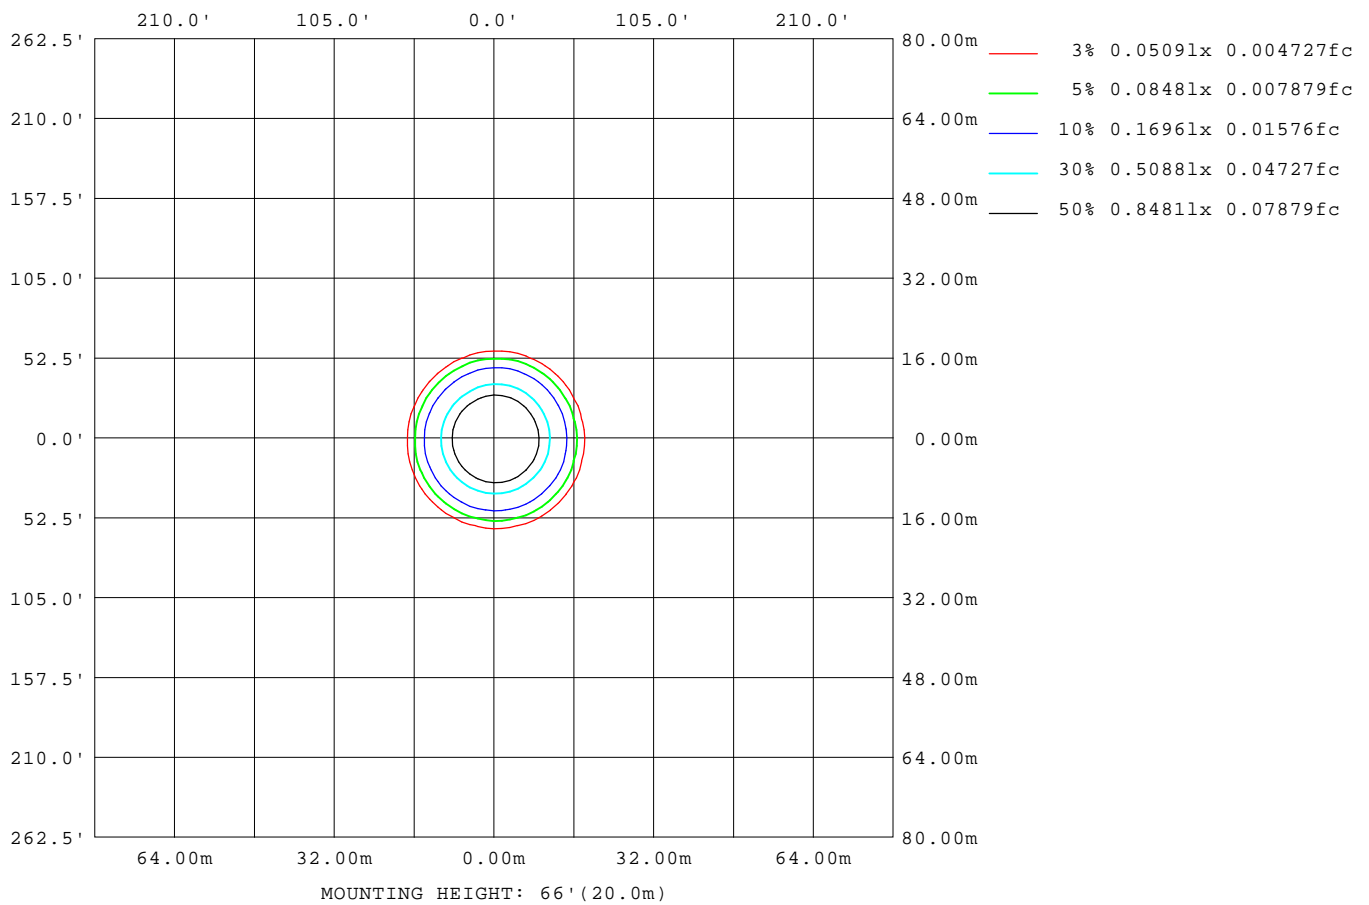

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-8-8

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084C 50R  
DRIVER: 9290 028 088 350mA  
30minutes warm-up

### LED Avg.L Report

Test:U:219.97V I:0.0398A P:8.2386W PF:0.9377 Freq:49.99Hz Lamp Flux:685.66x1 lm		
NAME: 2214.411-1-ACOT-96	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2308081002
MFR.: RISE	SUR.: 0.0025m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1379
L_0~180(75)av	712
L_0~180(85)av	935
L_90~270(65)av	1359
L_90~270(75)av	713
L_90~270(85)av	944
L_45(65)av	1798
L_45(75)av	872
L_45(85)av	991

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-8-8

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084C 50R  
DRIVER: 9290 028 088 350mA  
30minutes warm-up

## Planar Illuminance Curve

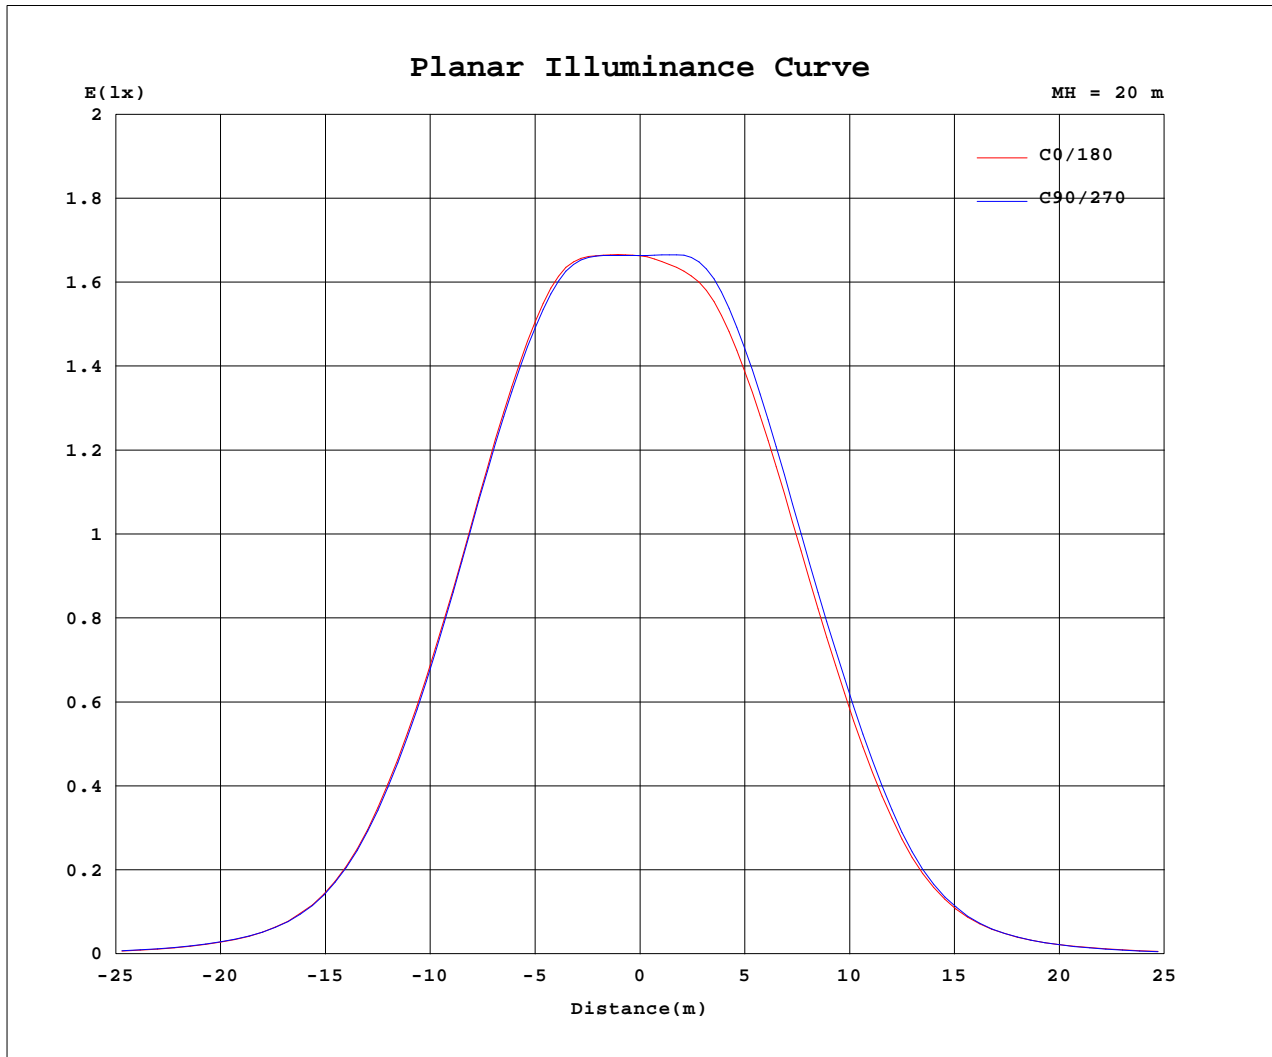

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2023-8-8

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084C 50R  
DRIVER: 9290 028 088 350mA  
30minutes warm-up

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.97V I:0.0398A P:8.2386W PF:0.9377 Freq:49.99Hz Lamp Flux:685.66x1 lm		
NAME: 2214.411-1-ACOT-96	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2308081002
MFR.: RISE	SUR.: 0.0025m2	Shielding Angle:

Table--1

UNIT: cd

C(DEC)	0	30	60	90	120	150	180	210	240	270	300	330						
γ (DEC)																		
0	666	666	666	666	666	666	666	666	666	666	666	666						
5	674	683	684	673	663	657	662	673	678	674	669	668						
10	685	709	709	681	667	647	651	671	681	674	666	675						
15	648	687	686	642	616	592	594	612	619	617	608	626						
20	559	584	582	554	524	502	496	500	503	517	520	532						
25	429	438	435	424	404	385	369	366	364	389	407	413						
30	286	290	287	281	267	250	232	227	225	247	267	275						
35	152	158	157	150	139	128	116	111	111	121	134	142						
40	69.7	73.7	73.9	69.2	63.6	58.8	52.8	49.9	50.1	53.6	59.6	64.1						
45	32.1	35.2	35.5	32.9	30.8	28.7	25.6	24.9	25.0	25.3	28.8	30.5						
50	14.6	18.2	18.3	15.3	16.2	15.1	12.0	13.6	13.1	11.2	15.0	15.5						
55	6.68	8.67	8.64	7.01	7.94	7.10	5.79	6.57	5.91	5.47	6.96	6.99						
60	2.90	4.34	4.40	3.36	4.16	3.86	2.78	3.61	3.26	2.38	3.63	3.70						
65	1.43	2.03	2.00	1.59	2.12	1.93	1.49	1.79	1.61	1.28	1.66	1.65						
70	0.84	1.09	1.11	0.95	1.14	1.12	0.85	1.01	0.94	0.72	0.95	0.97						
75	0.44	0.59	0.61	0.53	0.62	0.59	0.48	0.53	0.50	0.39	0.49	0.50						
80	0.25	0.33	0.34	0.30	0.36	0.34	0.29	0.31	0.29	0.24	0.27	0.28						
85	0.19	0.22	0.25	0.24	0.25	0.25	0.22	0.20	0.19	0.17	0.17	0.18						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-8-8

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084C 50R  
DRIVER: 9290 028 088 350mA  
30minutes warm-up