

Luminaire Photograph




Light Output Ratio:	78.6%	
Luminaire Power:	21.66 W	
SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	1.00	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Zoe
Test Date: 2022-12-26

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084 15R
DRIVER: PUP20A-1WMC 500mA
30minutes warm-up


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

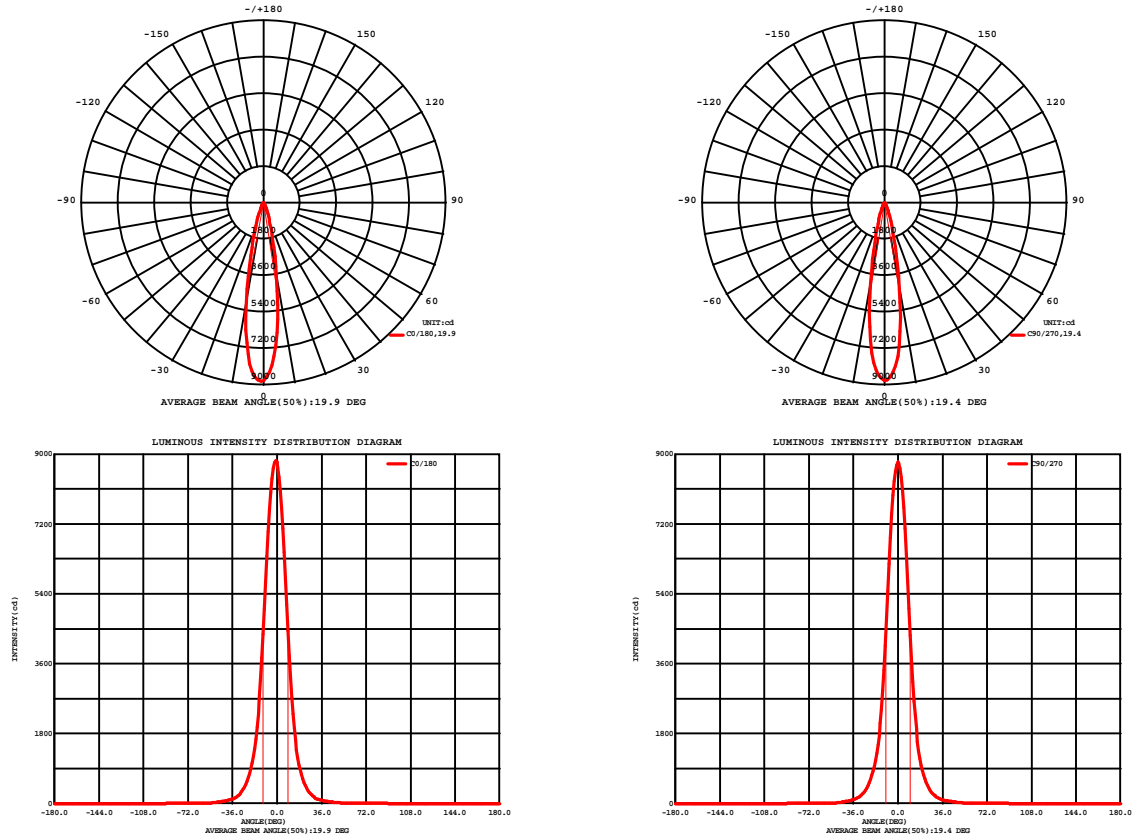

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.88V I:0.1815A P:21.661W PF:0.9947 Freq:59.98Hz Lamp Flux:1884x1 lm		
NAME: 2214.411-2-LEA-09	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2212261387
MFR.: RISE	SUR.:0.005865m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 68.40 lm/W			
MODEL	CREE	I _{max} (cd)	8828	S/MH(C0/180)	0.37
NOMINAL POWER(W)	22	LOR(%)	78.6	S/MH(C90/270)	0.33
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1481.6	h UP,DN(C0-180)	0.0,38.7
NOMINAL FLUX(lm)	1884	CIE CLASS	DIRECT	h UP,DN(C180-360)	0.0,40.0
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	120	h down(%)	78.6	CIBSE SHR MAX	1.00

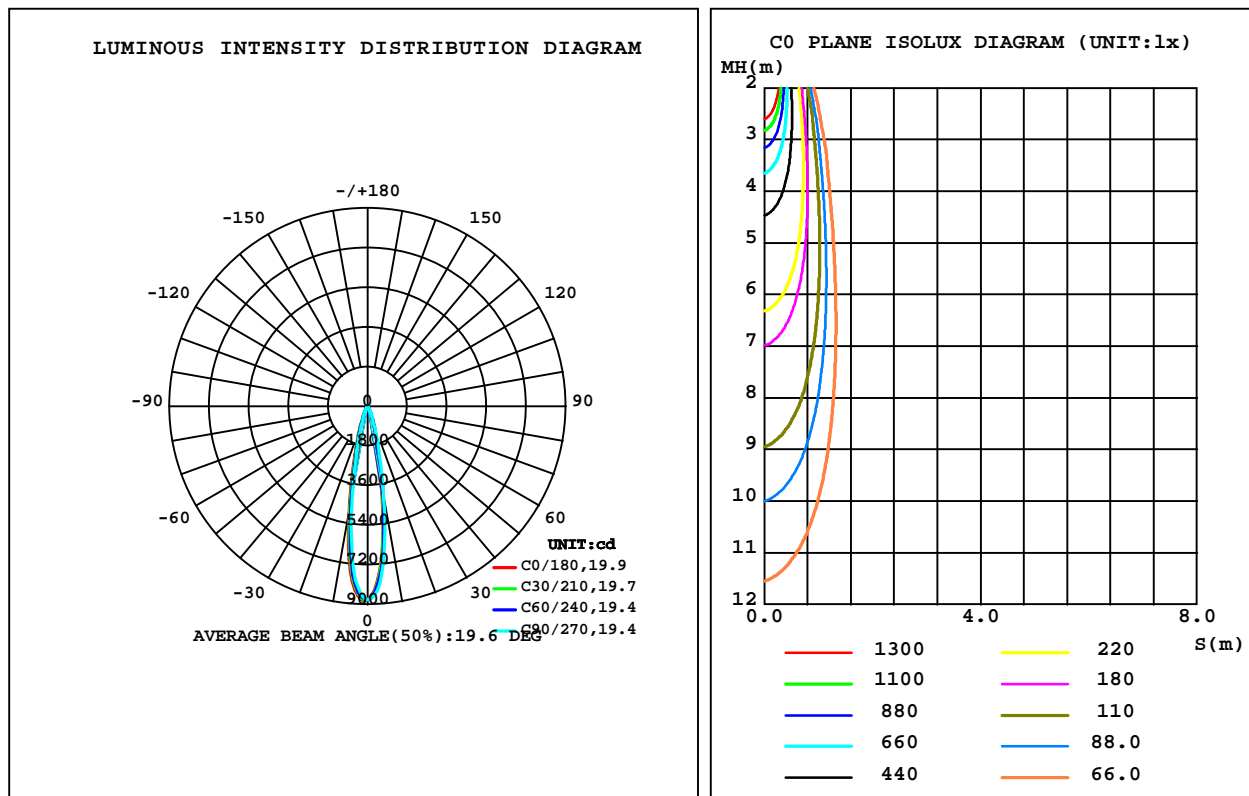

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-26

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084 15R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	3808	3963	4332	4683	5009	4555	4069	3979	0- 10	610.4	610.4	41.2,32.4
20	751.7	769.6	847.2	952.3	1043	948.0	840.5	778.4	10- 20	552.6	1163	78.5,61.7
30	165.2	174.6	201.0	219.5	238.2	225.8	199.0	182.6	20- 30	198.3	1361	91.9,72.3
40	55.72	59.44	66.16	70.17	76.05	73.53	65.84	61.60	30- 40	72.31	1434	96.8,76.1
50	20.71	22.54	23.04	27.26	25.89	25.77	13.17	22.13	40- 50	32.32	1466	98.9,77.8
60	4.649	5.479	4.925	5.754	4.668	4.518	3.647	4.700	50- 60	10.30	1476	99.6,78.4
70	2.485	2.834	2.553	2.725	2.359	1.953	1.339	2.152	60- 70	3.437	1480	99.9,78.5
80	0.7063	0.9256	0.8396	0.8315	0.6568	0.4143	0.3629	0.4955	70- 80	1.459	1481	100,78.6
90	0	0	0	0	0	0	0	0	80- 90	0.4188	1482	100,78.6
100	0	0	0	0	0	0	0	0	90-100	0	1482	100,78.6
110	0	0	0	0	0	0	0	0	100-110	0	1482	100,78.6
120	0	0	0	0	0	0	0	0	110-120	0	1482	100,78.6
130	0	0	0	0	0	0	0	0	120-130	0	1482	100,78.6
140	0	0	0	0	0	0	0	0	130-140	0	1482	100,78.6
150	0	0	0	0	0	0	0	0	140-150	0	1482	100,78.6
160	0	0	0	0	0	0	0	0	150-160	0	1482	100,78.6
170	0	0	0	0	0	0	0	0	160-170	0	1482	100,78.6
180	0	0	0	0	0	0	0	0	170-180	0	1482	100,78.6
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-26

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084 15R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up

LUMINANCE LIMITATION CURVES

Test:U:119.88V I:0.1815A P:21.661W PF:0.9947 Freq:59.98Hz Lamp Flux:1884x1 lm		
NAME: 2214.411-2-LEA-09	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2212261387
MFR.: RISE	SUR.:0.005865m2	Shielding Angle:

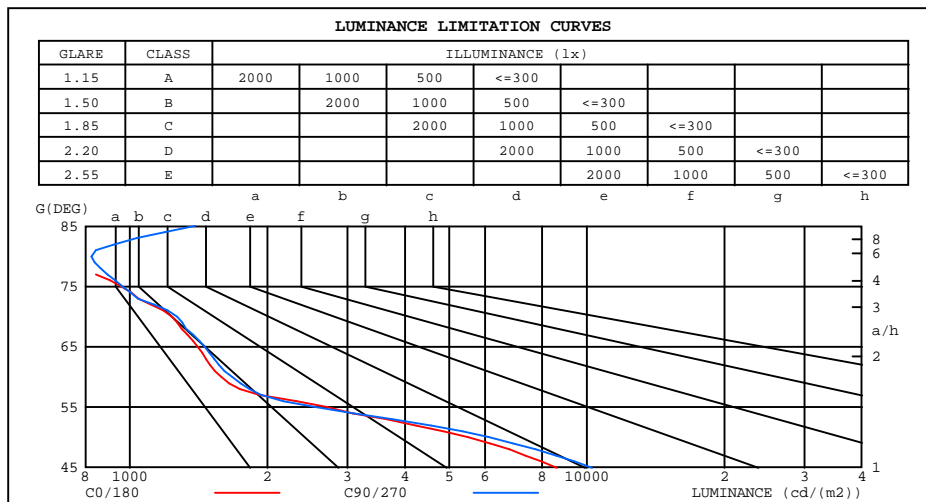


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-26

G Range: 0 - 180DEG
G Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084 15R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.88V I:0.1815A P:21.661W PF:0.9947 Freq:59.98Hz Lamp Flux:1884x1 lm		
NAME: 2214.411-2-LEA-09	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2212261387
MFR.: RISE	SUR.:0.005865m2	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	.94	.94	.94	.91	.91	.91	.87	.87	.87	.84	.84	.84	.80	.80	.80	.79
1.0	.89	.87	.86	.87	.86	.85	.84	.83	.82	.81	.80	.80	.78	.78	.77	.76
2.0	.85	.82	.80	.83	.81	.79	.81	.79	.78	.79	.77	.76	.77	.75	.75	.73
3.0	.81	.78	.76	.80	.77	.75	.78	.76	.74	.76	.75	.73	.75	.73	.72	.71
4.0	.78	.75	.72	.77	.74	.72	.75	.73	.71	.74	.72	.70	.73	.71	.70	.69
5.0	.75	.72	.69	.74	.71	.69	.73	.71	.69	.72	.70	.68	.71	.69	.67	.67
6.0	.73	.69	.67	.72	.69	.67	.71	.68	.66	.70	.68	.66	.69	.67	.66	.65
7.0	.70	.67	.65	.70	.67	.65	.69	.66	.64	.68	.66	.64	.67	.65	.64	.63
8.0	.68	.65	.63	.68	.65	.63	.67	.64	.62	.66	.64	.62	.66	.64	.62	.61
9.0	.66	.63	.61	.66	.63	.61	.65	.63	.61	.65	.62	.61	.64	.62	.60	.60
10.0	.65	.62	.59	.64	.61	.59	.64	.61	.59	.63	.61	.59	.63	.61	.59	.58

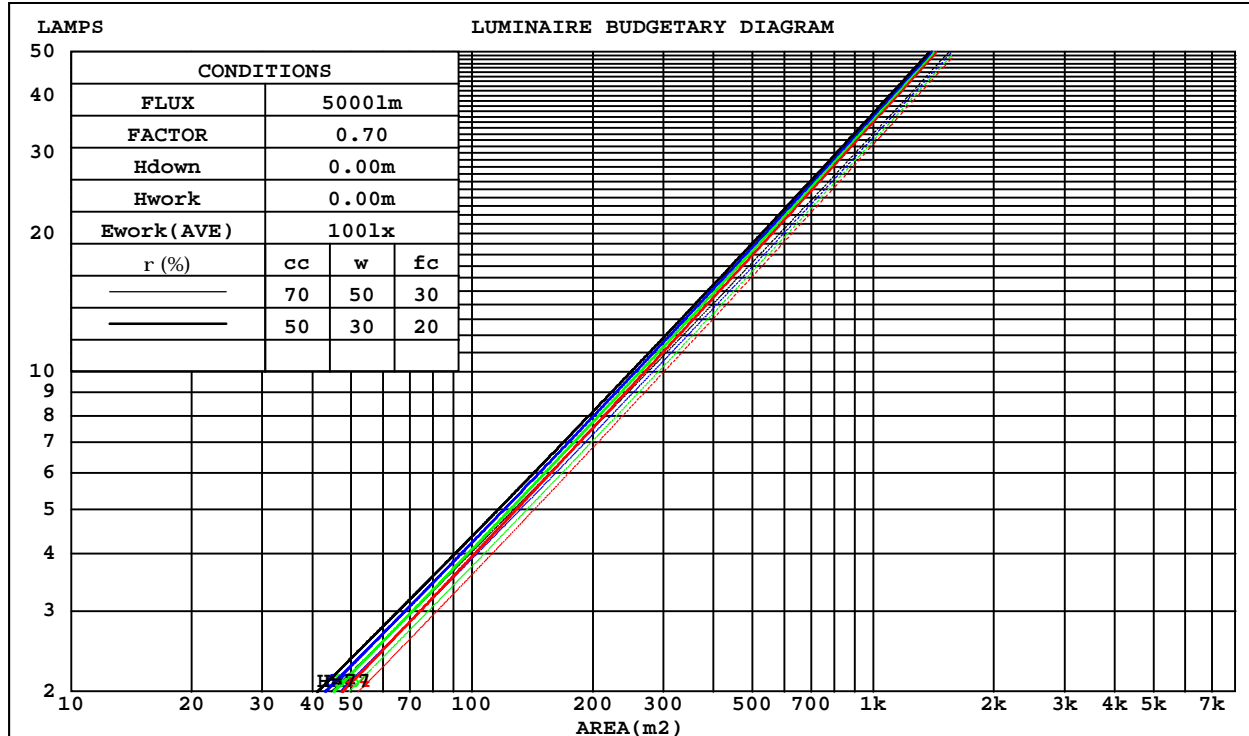

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-26

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084 15R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up

WEC AND CCEC

Test:U:119.88V I:0.1815A P:21.661W PF:0.9947 Freq:59.98Hz Lamp Flux:1884x1 lm		
NAME: 2214.411-2-LEA-09	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2212261387
MFR.: RISE	SUR.:0.005865m2	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.108	.061	.019	.102	.058	.019	.093	.053	.017	.084	.048	.016	.076	.044	.014	
2.0	.100	.055	.017	.096	.053	.016	.088	.049	.015	.080	.045	.014	.073	.042	.013	
3.0	.093	.050	.015	.090	.048	.014	.083	.045	.014	.077	.042	.013	.071	.039	.012	
4.0	.087	.045	.013	.084	.044	.013	.078	.042	.012	.073	.039	.012	.068	.037	.011	
5.0	.082	.042	.012	.079	.041	.012	.075	.039	.011	.070	.037	.011	.066	.035	.011	
6.0	.077	.039	.011	.075	.038	.011	.071	.036	.011	.067	.035	.010	.064	.033	.010	
7.0	.073	.036	.010	.071	.036	.010	.068	.034	.010	.064	.033	.010	.061	.032	.009	
8.0	.070	.034	.010	.068	.034	.009	.065	.032	.009	.062	.031	.009	.059	.030	.009	
9.0	.066	.032	.009	.065	.032	.009	.062	.031	.009	.060	.030	.009	.057	.029	.008	
10.0	.064	.030	.008	.062	.030	.008	.060	.029	.008	.057	.029	.008	.055	.028	.008	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.150	.150	.150	.128	.128	.128	.087	.087	.087	.050	.050	.050	.016	.016	.016	
1.0	.132	.124	.116	.113	.106	.100	.077	.073	.069	.045	.042	.040	.014	.014	.013	
2.0	.118	.104	.093	.101	.090	.080	.069	.062	.056	.040	.036	.033	.013	.012	.011	
3.0	.106	.089	.075	.091	.077	.065	.063	.053	.046	.036	.031	.027	.012	.010	.009	
4.0	.097	.077	.062	.083	.067	.054	.057	.046	.038	.033	.027	.022	.011	.009	.007	
5.0	.088	.067	.052	.076	.058	.045	.052	.041	.032	.030	.024	.019	.010	.008	.006	
6.0	.081	.059	.044	.070	.051	.038	.048	.036	.027	.028	.021	.016	.009	.007	.005	
7.0	.075	.053	.037	.065	.046	.033	.045	.032	.023	.026	.019	.014	.008	.006	.005	
8.0	.070	.048	.032	.060	.041	.028	.042	.029	.020	.024	.017	.012	.008	.006	.004	
9.0	.065	.043	.028	.056	.037	.025	.039	.026	.017	.023	.016	.010	.007	.005	.003	
10.0	.061	.039	.025	.053	.034	.022	.037	.024	.015	.021	.014	.009	.007	.005	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-26

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084 15R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:119.88V I:0.1815A P:21.661W PF:0.9947 Freq:59.98Hz Lamp Flux:1884x1 lm										
NAME: 2214.411-2-LEA-09					TYPE:			WEIGHT:		
SPEC.:3000K					DIM.:			SERIAL No.:2212261387		
MFR.: RISE					SUR.:0.005865m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	10.2	10.8	10.4	11.0	11.1	10.7	11.4	10.9	11.5	11.7
3H	10.2	10.8	10.4	11.0	11.2	10.7	11.3	10.9	11.5	11.7
4H	10.2	10.7	10.4	10.9	11.2	10.7	11.3	10.9	11.5	11.7
6H	10.1	10.7	10.4	10.9	11.1	10.6	11.2	10.9	11.4	11.6
8H	10.1	10.6	10.4	10.9	11.1	10.6	11.1	10.9	11.4	11.6
12H	10.0	10.6	10.4	10.8	11.1	10.6	11.1	10.9	11.3	11.6
4H 2H	10.1	10.7	10.3	10.9	11.1	10.6	11.2	10.9	11.4	11.6
3H	10.1	10.6	10.4	10.9	11.2	10.6	11.1	10.9	11.4	11.6
4H	10.1	10.6	10.5	10.9	11.2	10.6	11.1	10.9	11.3	11.6
6H	10.1	10.5	10.4	10.8	11.2	10.5	11.0	10.9	11.3	11.6
8H	10.0	10.4	10.4	10.8	11.1	10.5	10.9	10.9	11.3	11.6
12H	10.0	10.4	10.4	10.7	11.1	10.5	10.9	10.9	11.2	11.6
8H 4H	10.0	10.4	10.4	10.8	11.1	10.5	10.9	10.9	11.2	11.6
6H	10.0	10.3	10.4	10.7	11.1	10.5	10.8	10.9	11.2	11.6
8H	10.0	10.3	10.4	10.7	11.1	10.4	10.7	10.9	11.1	11.6
12H	10.0	10.2	10.4	10.6	11.1	10.5	10.7	10.9	11.1	11.6
12H 4H	10.0	10.3	10.4	10.7	11.1	10.4	10.8	10.8	11.2	11.5
6H	10.0	10.2	10.4	10.7	11.1	10.4	10.7	10.9	11.1	11.5
8H	9.9	10.2	10.4	10.6	11.1	10.4	10.7	10.9	11.1	11.6
Variations with the observer position at spacings:										
S = 1.0H	+ 2.1 / - 4.5					+ 2.4 / - 4.9				
1.5H	+ 2.8 / - 3.4					+ 3.3 / - 3.7				
2.0H	+ 4.1 / - 3.9					+ 4.8 / - 4.1				

CIE Pub.117, 1884 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 2.2$)
Area: 0.005865 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-26

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084 15R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up

UTILIZATION FACTORS TABLE

Test:U:119.88V I:0.1815A P:21.661W PF:0.9947 Freq:59.98Hz Lamp Flux:1884x1 lm		
NAME: 2214.411-2-LEA-09	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2212261387
MFR.: RISE	SUR.:0.005865m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	70	66	63	70	66	63	69	65	63	60
0.80	76	72	69	76	71	69	75	71	69	66
1.00	79	75	72	79	75	72	77	75	72	69
1.25	82	78	76	81	78	75	80	77	75	72
1.50	84	81	78	83	80	78	81	79	77	74
2.00	86	83	81	85	82	80	83	81	79	75
2.50	87	84	82	86	83	81	84	82	80	75
3.00	88	86	84	87	85	83	84	83	81	76
4.00	90	88	86	88	87	85	85	84	83	77
5.00	91	89	88	89	88	87	86	85	84	78
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-26

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084 15R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up

ISOCANDELA DIAGRAM

Test:U:119.88V I:0.1815A P:21.661W PF:0.9947 Freq:59.98Hz Lamp Flux:1884x1 lm		
NAME: 2214.411-2-LEA-09	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2212261387
MFR.: RISE	SUR.:0.005865m2	Shielding Angle:

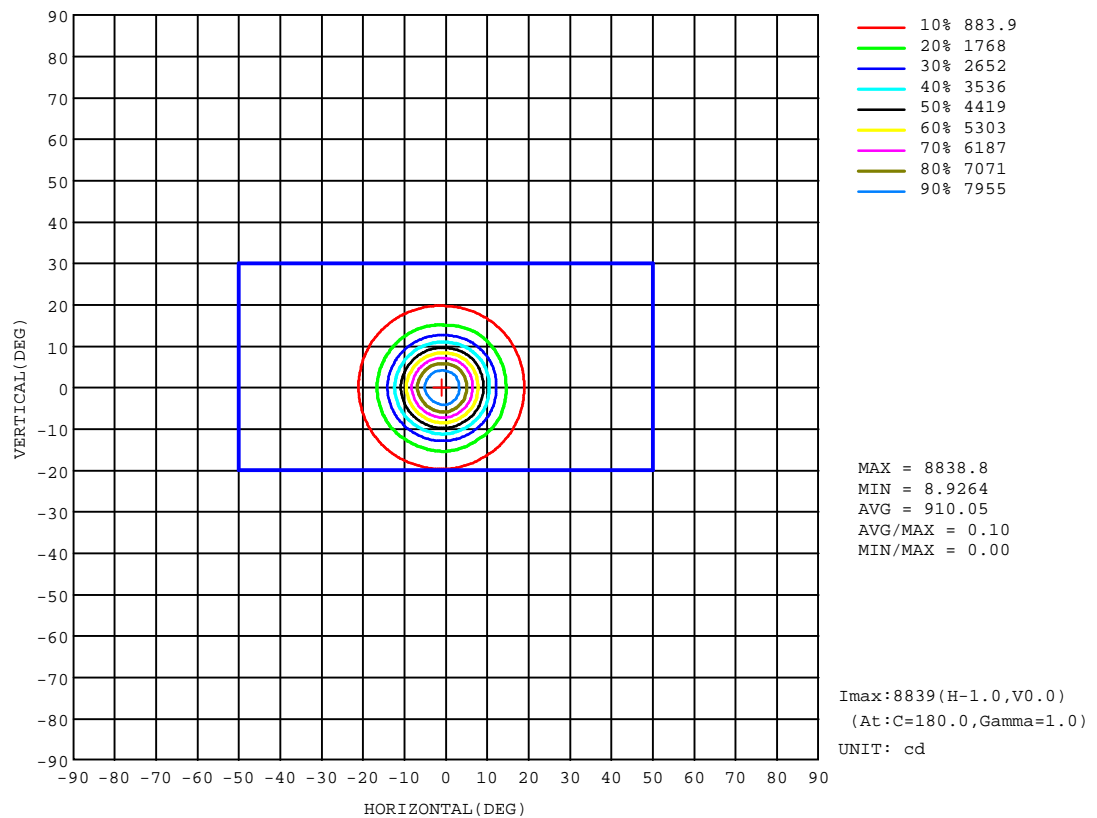


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-26

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084 15R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up

AAI Figure

Test:U:119.88V I:0.1815A P:21.661W PF:0.9947 Freq:59.98Hz Lamp Flux:1884x1 lm		
NAME: 2214.411-2-LEA-09	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2212261387
MFR.: RISE	SUR.:0.005865m2	Shielding Angle:

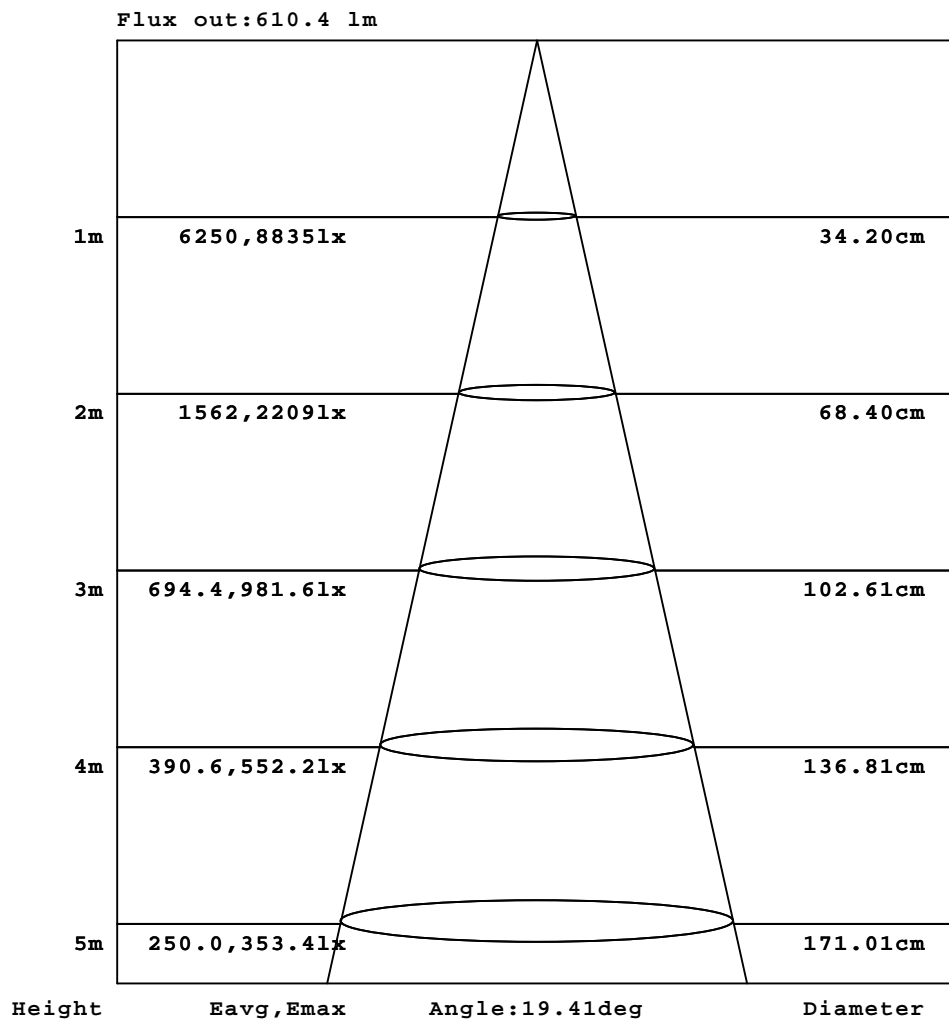

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-26

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084 15R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up



ISOLUX DIAGRAM

Test:U:119.88V I:0.1815A P:21.661W PF:0.9947 Freq:59.98Hz Lamp Flux:1884x1 lm		
NAME: 2214.411-2-LEA-09	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2212261387
MFR.: RISE	SUR.:0.005865m2	Shielding Angle:

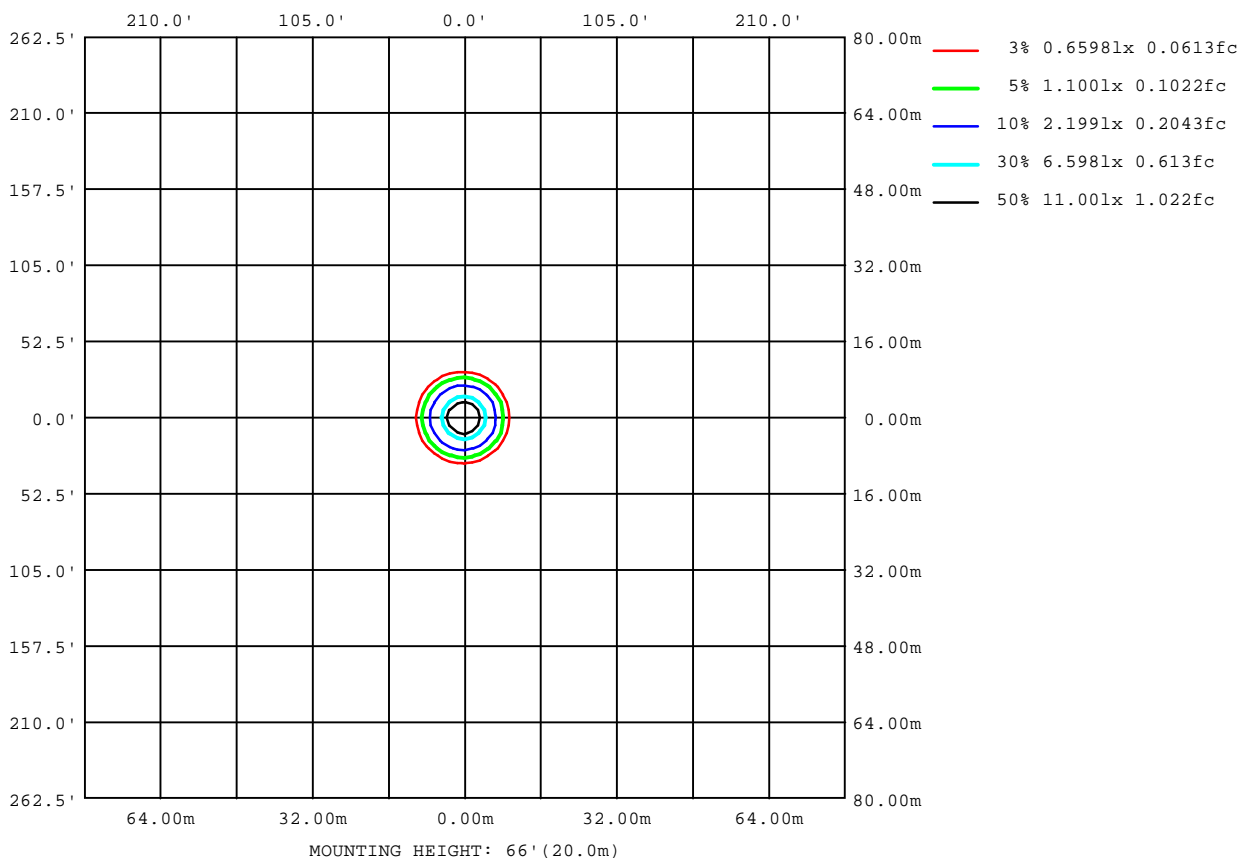

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Zoe
Test Date: 2022-12-26

```

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
          LENS: PM-1084 15R
          DRIVER:PUP20A-1WMC 500mA
          30minutes warm-up

```

LED Avg.L Report

Test:U:119.88V I:0.1815A P:21.661W PF:0.9947 Freq:59.98Hz Lamp Flux:1884x1 lm		
NAME: 2214.411-2-LEA-09	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2212261387
MFR.: RISE	SUR.:0.005865m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1383
L_0~180(75)av	932
L_0~180(85)av	585
L_90~270(65)av	1212
L_90~270(75)av	699
L_90~270(85)av	933
L_45(65)av	1445
L_45(75)av	912
L_45(85)av	765

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-26

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084 15R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up

Planar Illuminance Curve

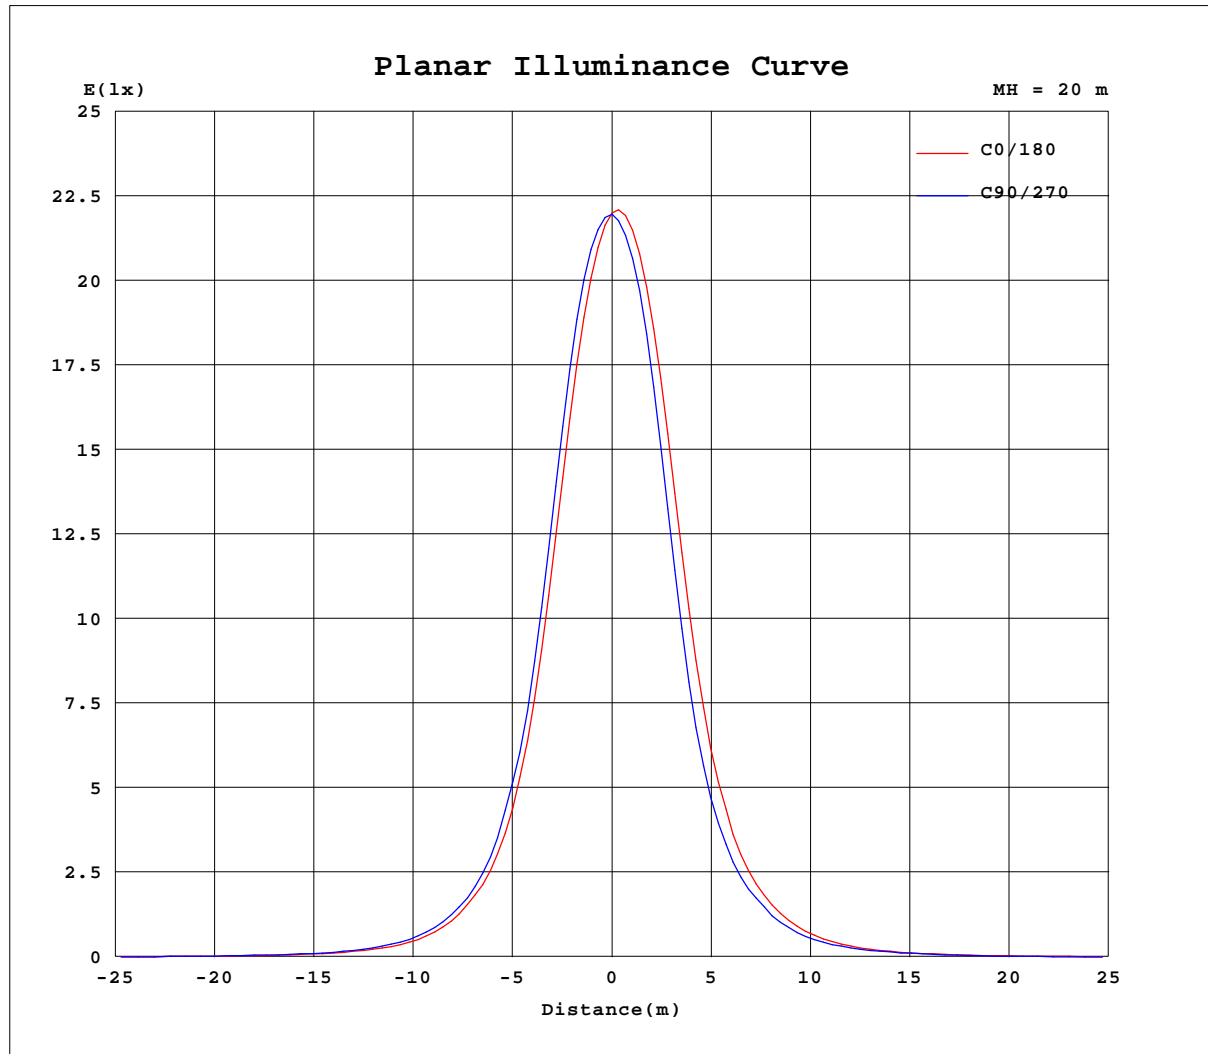

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Zoe
 Test Date: 2022-12-26

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: CMA1306-0000-000F0U0A30G Ra:90
 LENS: PM-1084 15R
 DRIVER: PUP20A-1WMC 500mA
 30minutes warm-up



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.88V I:0.1815A P:21.661W PF:0.9947 Freq:59.98Hz Lamp Flux:1884x1 lm		
NAME: 2214.411-2-LEA-09	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2212261387
MFR.: RISE	SUR.:0.005865m2	Shielding Angle:

Table--1

UNIT: cd

C(°) g (°)	0	30	60	90	120	150	180	210	240	270	300	330						
0	8787	8787	8787	8787	8787	8787	8787	8787	8787	8787	8787	8787						
5	7083	7216	7373	7628	7721	7866	8006	7876	7723	7457	7346	7193						
10	3808	3905	4021	4332	4539	4827	5009	4713	4397	4069	4022	3935						
15	1627	1731	1710	1930	1992	2244	2292	2115	1966	1757	1787	1681						
20	752	759	780	847	909	995	1043	983	913	840	790	766						
25	340	353	362	401	425	471	493	467	442	396	374	350						
30	165	171	178	201	207	232	238	229	223	199	192	173						
35	92.9	96.0	100	109	114	123	128	125	121	112	105	96.2						
40	55.7	57.8	61.1	66.2	68.4	72.0	76.0	74.3	72.8	65.8	64.4	58.8						
45	35.6	36.7	38.9	42.5	44.1	46.3	47.4	46.5	44.9	34.8	40.2	37.7						
50	20.7	22.0	23.1	23.0	26.5	28.0	25.9	27.1	24.4	13.2	22.0	22.2						
55	9.08	11.1	11.7	8.59	12.9	14.3	10.3	12.9	8.43	5.21	8.04	11.1						
60	4.65	5.48	5.48	4.92	5.41	6.10	4.67	4.90	4.13	3.65	4.24	5.16						
65	3.49	3.95	3.90	3.62	3.84	3.93	3.37	3.32	2.81	2.39	2.96	3.63						
70	2.49	2.90	2.76	2.55	2.65	2.81	2.36	2.19	1.72	1.34	1.84	2.47						
75	1.45	1.83	1.67	1.47	1.52	1.67	1.38	1.19	0.81	0.65	0.89	1.36						
80	0.71	0.94	0.91	0.84	0.83	0.84	0.66	0.49	0.34	0.36	0.40	0.60						
85	0.37	0.51	0.67	0.71	0.63	0.32	0.23	0.21	0.22	0.24	0.26	0.30						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-26

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084 15R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up