




STARLUX-FLAT-3-STA



## Product specification

## INTERIOR COMBO LIGHTS

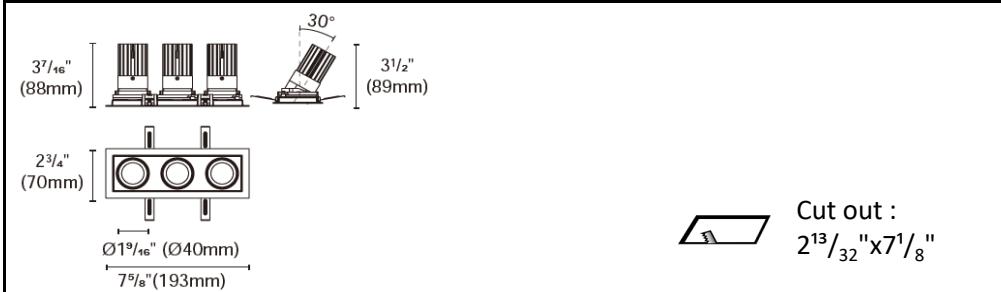

## Technical Specification


Article number	2214.411-3-LEA-09B	
LED Consumption	10W x3 (NON-IC)	8W x3 (IC)
Fixture Consumption	20W	-
Current / Voltage	500mA / 18Vdc	400mA / 17.8Vdc
CRI	90+	90+
CCT	3000K	3000K
LED Lumen *1	913lm x3	756lm x3
Delivered Lumen	-	-
Beam Angle available	15°/24°/36°/50° (Lens)	

## Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Freqency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character		Materials	
Products Standard	UL2108	Luminaire	Aluminum die cast
	-	Trim	Aluminum die cast
Insulation	CLASS III	Optics	PMMA Lens
Protection	Damp Location	Heat sink	Forged aluminum
Tilt / Rotate	0~30° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	-	Baffle Color available	white / black

## Accessories

ACHO-18  
honeycomb louver  
+PC sheetSG-002  
Striped Glass

## Photometric

## Remarks




\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.

## INSTALLATION OPTIONS



### KIG-040-DWJ

Triac/Phase , 0-10V , 1-10V , Potentiometer ,  
10V PWM 5 in 1 dimming  
40W , 1~3T  
Type: Gear box

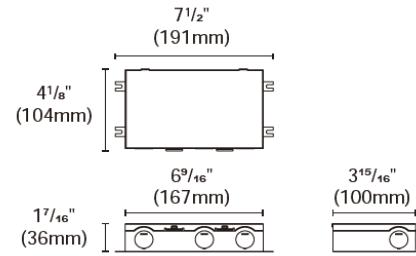


### ACCH-12-61X181

for Multiple 1T/2T/3T  
Type: New construction plate

#### Cut out:

1T :  $2\frac{13}{32}'' \times 2\frac{13}{32}''$  (61x61mm)  
2T :  $2\frac{13}{32}'' \times 4\frac{3}{4}''$  (61x121mm)  
3T :  $2\frac{13}{32}'' \times 7\frac{1}{8}''$  (61x181mm)



\* Cutout accessories are available for different cutout dimensions




### ACCH-3B-61X181

for Multiple 3T  
Type: IC Box

#### Cut out:

3T :  $2\frac{13}{32}'' \times 7\frac{1}{8}''$  (61x181mm)

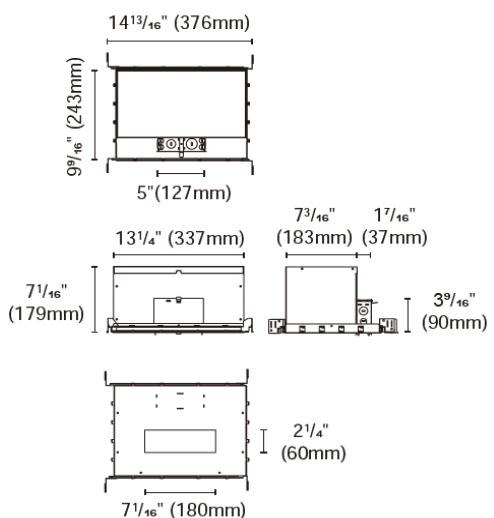

## Optional driver available



### KIG-040-DW

Type: Drive

Triac / 0-10V/1-10V/Potentiometer/10V  
PWM 5 in 1 Dimmable LED driver  
Multi-current output series 40W  
For 1~3T



### PUP10A-1WMC-700

Type: Driver

0/1-10V  
Output: 500mA/2-20V/10W  
400mA/2-21V/8.4W  
For 1T



### PUP20A-1WMC

Type: Drive

0/1-10V  
Output: 500mA/9-40V/20W  
400mA/9-45V/18W  
For 1~2T



### PUP10T-1LMC-700

Type: Driver

Triac  
Output: 500mA/2-20VDC/10W  
400mA/2-21VDC/8.4W  
For 1T



### PUP20T-1LMC

Type: Driver

Triac  
Output: 500mA/9-40V/20W  
400mA/9-45V/18W  
For 1~2T



### PUP10D-1WMC-700

Type: Driver

Dali  
Output: 500mA/2-20V/10W  
400mA/2-21V/8.4W  
For 1T



### PUP20D-1WMC

Type: Driver

Dali  
Output: 500mA/9-40V/20W  
400mA/9-45V/18W  
For 1~2T



### ACOT-106

Type: Quick connector