


Luminaire Photograph

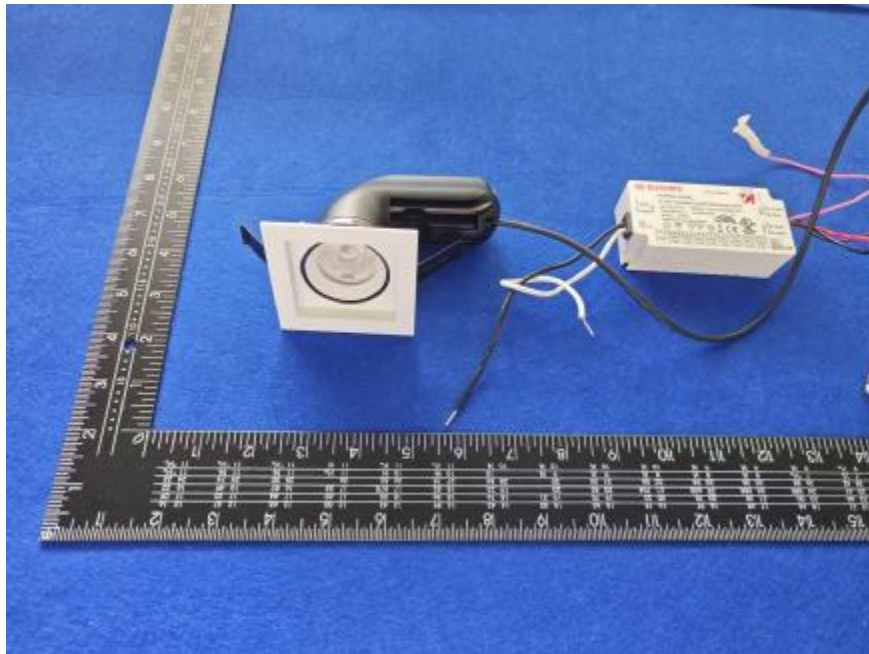

Light Output Ratio:	85.7%	
Luminaire Power:	13.78 W	
SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	0.30	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3 °C
Operators: zoe
Test Date: 2025-7-16

Range: 0 - 180DEG
Interval: 0.5DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRH-30G10T0-G-83 Ra: 90
LENS: PM-1084 15R
DRIVER: PUP20A-1WMC 600mA
30minutes warm-up

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

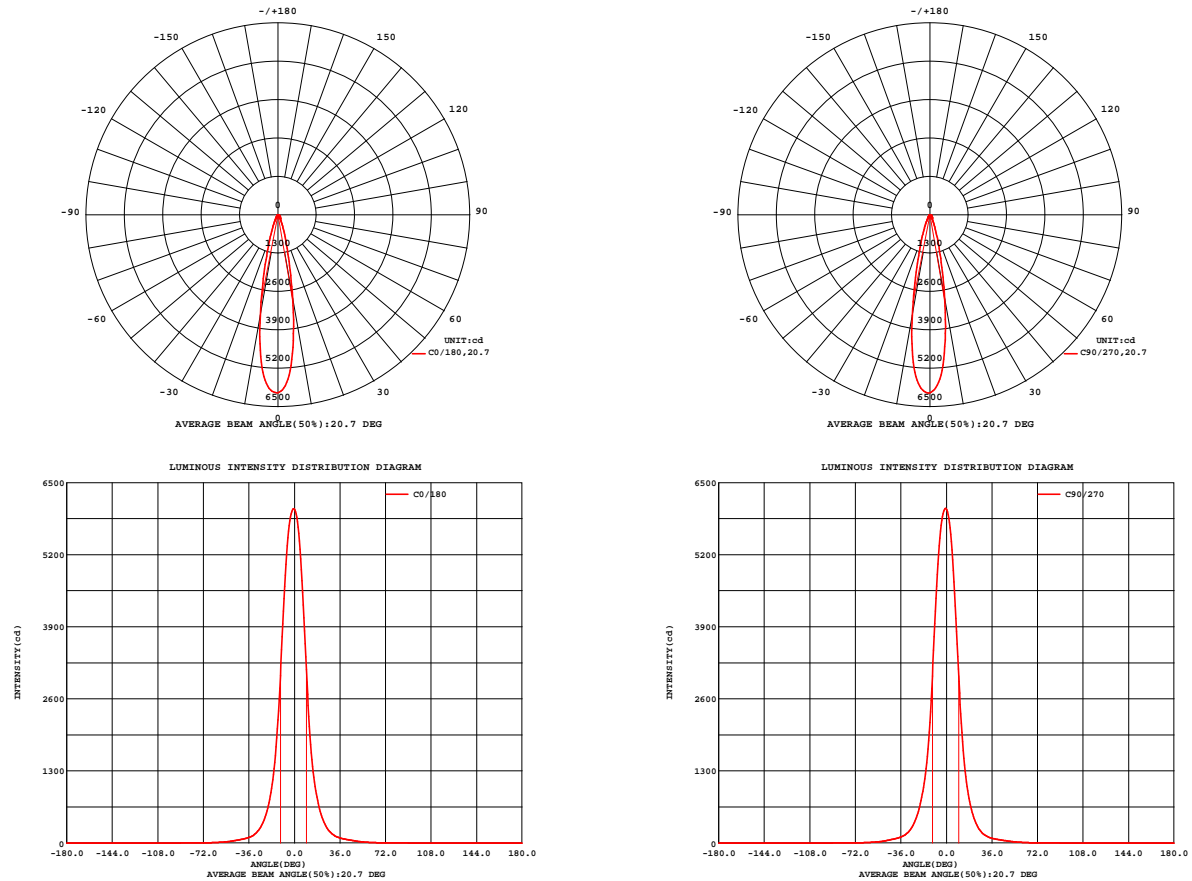


Fig. C0/C180

Fig. C90/C270

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3 °C
Operators: zoe
Test Date: 2025-7-16


Range: 0 - 180DEG
Interval: 0.5DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRH-30G10T0-G-83 Ra: 90
LENS: PM-1084 15R
DRIVER: PUP20A-1WMC 600mA

30minutes warm-up

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.09V I:0.1157A P:13.780W PF:0.9906 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2214.411-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507160447
MFR.: RISE	SUR.: 0.002601m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 83.53 lm/W			
MODEL	Brideglux	Imax(cd)	6038	S/MH(C0/180)	0.37
NOMINAL POWER(W)	13	LOR(%)	85.7	S/MH(C90/270)	0.37
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1151.0	UP,DN(C0-180)	0.0,40.0
NOMINAL FLUX(lm)	1342.44	CIE CLASS	DIRECT	UP,DN(C180-360)	0.0,45.7
LAMPS INSIDE	1	up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	120	down(%)	85.7	CIBSE SHR MAX	0.30

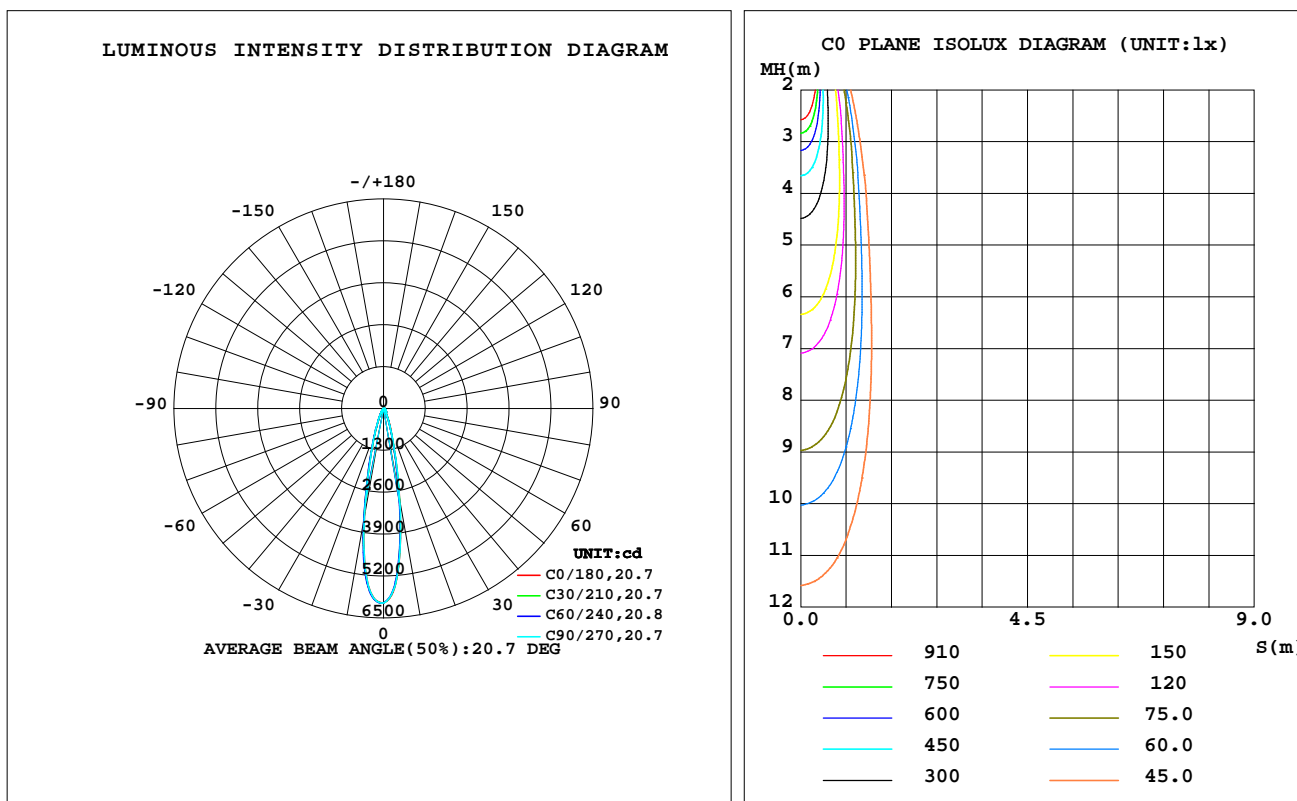

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-16

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084 15R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

	C0	C45	C90	C135	C180	C225	C270	C315		zone	total	%lum,lamp
10	2898	2843	2913	3108	3482	3561	3476	3244	0- 10	435.6	435.6	37.8,32.4
20	611.3	581.7	595.9	637.3	725.5	751.0	767.1	698.3	10- 20	417.5	853.1	74.1,63.5
30	160.4	151.0	149.8	156.0	181.8	195.3	195.0	178.6	20- 30	158.5	1012	87.9,75.4
40	70.03	67.61	66.23	67.46	73.43	80.11	79.71	75.71	30- 40	67.86	1079	93.8,80.4
50	29.55	35.81	30.57	37.58	31.75	39.60	31.91	38.69	40- 50	40.84	1120	97.3,83.5
60	10.22	13.34	11.17	14.17	10.90	14.05	11.28	13.99	50- 60	19.98	1140	99.1,84.9
70	3.217	3.776	3.262	4.156	3.264	4.056	3.224	4.086	60- 70	7.484	1148	99.7,85.5
80	1.362	1.532	1.302	1.396	1.100	1.295	1.136	1.410	70- 80	2.396	1150	99.9,85.7
90	0	0	0	0	0	0	0	0	80- 90	0.8868	1151	100,85.7
100	0	0	0	0	0	0	0	0	90-100	0	1151	100,85.7
110	0	0	0	0	0	0	0	0	100-110	0	1151	100,85.7
120	0	0	0	0	0	0	0	0	110-120	0	1151	100,85.7
130	0	0	0	0	0	0	0	0	120-130	0	1151	100,85.7
140	0	0	0	0	0	0	0	0	130-140	0	1151	100,85.7
150	0	0	0	0	0	0	0	0	140-150	0	1151	100,85.7
160	0	0	0	0	0	0	0	0	150-160	0	1151	100,85.7
170	0	0	0	0	0	0	0	0	160-170	0	1151	100,85.7
180	0	0	0	0	0	0	0	0	170-180	0	1151	100,85.7
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-16

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084 15R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

LUMINANCE LIMITATION CURVES

Test:U:120.09V I:0.1157A P:13.780W PF:0.9906 Freq:59.98Hz
Lamp Flux:1342.44x1 lm

NAME: 2214.411-LEA-28-H0

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2507160447

MFR.: RISE

SUR.: 0.002601m2

Shielding Angle:

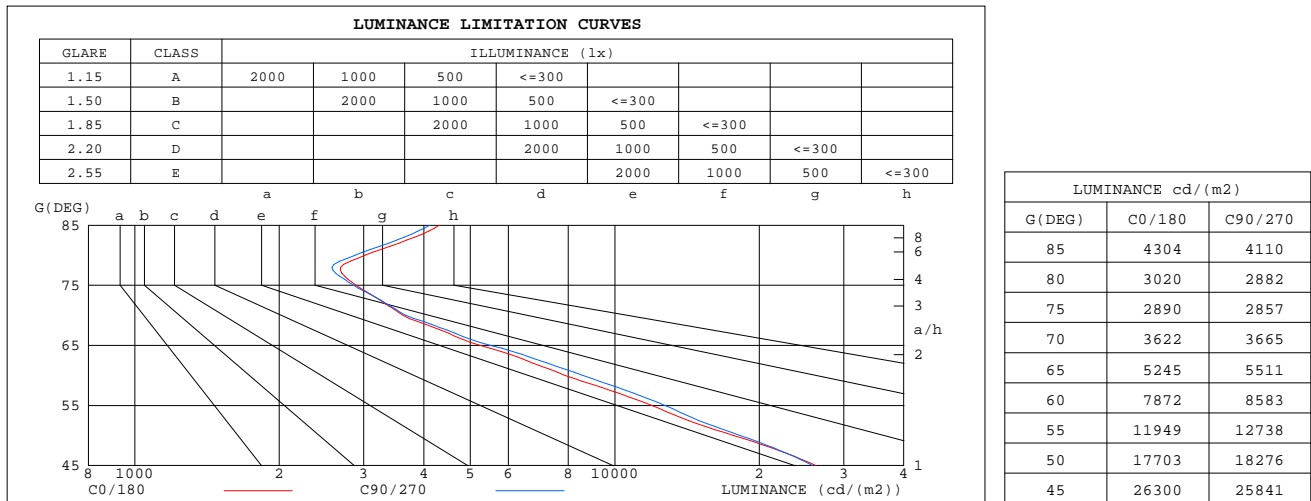

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-16


Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084 15R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.09V I:0.1157A P:13.780W PF:0.9906 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2214.411-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507160447
MFR.: RISE	SUR.: 0.002601m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.02	1.02	1.02	.00	.00	.00	.95	.95	.95	.91	.91	.91	.87	.87	.87	.86
1.0	.96	.95	.93	.95	.93	.92	.91	.90	.89	.88	.87	.86	.85	.84	.84	.82
2.0	.91	.89	.86	.90	.88	.85	.87	.85	.84	.85	.83	.82	.83	.81	.80	.79
3.0	.87	.84	.81	.86	.83	.81	.84	.81	.79	.82	.80	.78	.80	.78	.77	.76
4.0	.83	.80	.77	.83	.79	.77	.81	.78	.76	.79	.77	.75	.78	.76	.74	.73
5.0	.80	.76	.74	.79	.76	.73	.78	.75	.73	.77	.74	.72	.75	.73	.71	.70
6.0	.77	.73	.71	.77	.73	.70	.75	.72	.70	.74	.72	.70	.73	.71	.69	.68
7.0	.75	.71	.68	.74	.70	.68	.73	.70	.68	.72	.69	.67	.71	.69	.67	.66
8.0	.72	.68	.66	.72	.68	.66	.71	.68	.65	.70	.67	.65	.69	.67	.65	.64
9.0	.70	.66	.64	.70	.66	.64	.69	.66	.64	.68	.65	.63	.68	.65	.63	.62
10.0	.68	.64	.62	.68	.64	.62	.67	.64	.62	.67	.64	.62	.66	.63	.61	.61

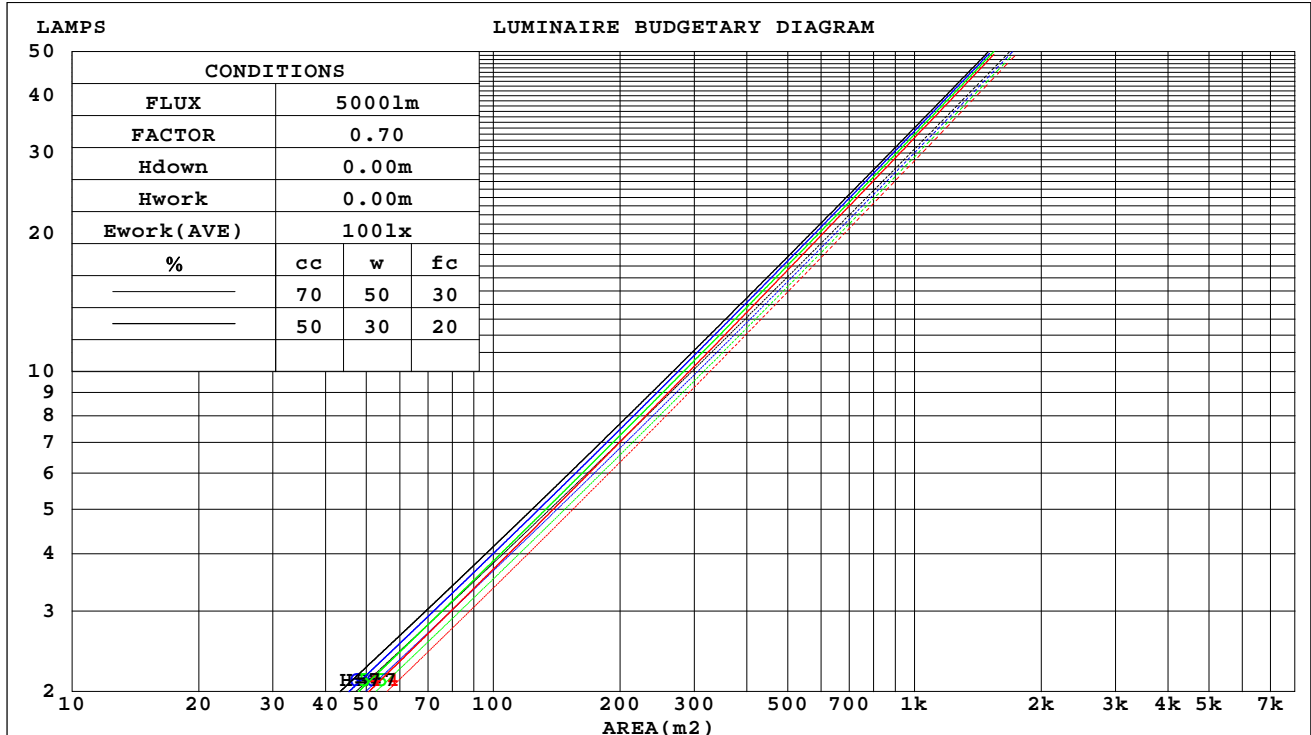

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-16

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084 15R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

WEC AND CCEC

Test:U:120.09V I:0.1157A P:13.780W PF:0.9906 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2214.411-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507160447
MFR.: RISE	SUR.: 0.002601m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.125	.071	.022	.119	.068	.022	.108	.062	.020	.099	.057	.018	.090	.052	.017	
2.0	.116	.064	.020	.112	.062	.019	.103	.057	.018	.095	.053	.017	.087	.049	.016	
3.0	.109	.058	.017	.105	.056	.017	.097	.053	.016	.091	.050	.015	.084	.047	.014	
4.0	.102	.053	.016	.099	.052	.015	.092	.049	.015	.087	.046	.014	.081	.044	.013	
5.0	.096	.049	.014	.093	.048	.014	.088	.046	.013	.083	.044	.013	.078	.042	.013	
6.0	.091	.045	.013	.088	.044	.013	.083	.043	.012	.079	.041	.012	.075	.040	.012	
7.0	.086	.042	.012	.084	.042	.012	.080	.040	.012	.076	.039	.011	.072	.038	.011	
8.0	.081	.040	.011	.080	.039	.011	.076	.038	.011	.073	.037	.011	.070	.036	.010	
9.0	.078	.038	.010	.076	.037	.010	.073	.036	.010	.070	.035	.010	.067	.034	.010	
10.0	.074	.036	.010	.073	.035	.010	.070	.034	.010	.067	.033	.009	.065	.033	.009	

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.163	.163	.163	.140	.140	.140	.095	.095	.095	.055	.055	.055	.017	.017	.017	
1.0	.145	.135	.126	.124	.116	.109	.085	.080	.075	.049	.046	.044	.016	.015	.014	
2.0	.130	.114	.100	.111	.098	.087	.076	.068	.060	.044	.039	.035	.014	.013	.012	
3.0	.117	.097	.081	.101	.084	.070	.069	.058	.049	.040	.034	.029	.013	.011	.010	
4.0	.107	.084	.067	.092	.073	.058	.063	.051	.041	.037	.030	.024	.012	.010	.008	
5.0	.098	.074	.056	.084	.064	.048	.058	.045	.034	.034	.026	.020	.011	.009	.007	
6.0	.091	.065	.047	.078	.056	.041	.054	.039	.029	.031	.023	.017	.010	.008	.006	
7.0	.084	.058	.040	.072	.050	.035	.050	.035	.025	.029	.021	.015	.009	.007	.005	
8.0	.078	.052	.035	.068	.045	.030	.047	.032	.021	.027	.019	.013	.009	.006	.004	
9.0	.074	.048	.030	.063	.041	.026	.044	.029	.019	.026	.017	.011	.008	.006	.004	
10.0	.069	.044	.026	.060	.038	.023	.041	.027	.016	.024	.016	.010	.008	.005	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-16

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084 15R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:120.09V I:0.1157A P:13.780W PF:0.9906 Freq:59.98Hz Lamp Flux:1342.44x1 lm										
NAME: 2214.411-LEA-28-H0					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2507160447		
MFR.: RISE					SUR.: 0.002601m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.9	15.6	15.1	15.7	15.9	14.8	15.5	15.0	15.6	15.8
3H	14.9	15.5	15.1	15.7	15.9	14.8	15.5	15.0	15.6	15.8
4H	14.9	15.5	15.1	15.7	15.9	14.8	15.4	15.0	15.6	15.8
6H	14.8	15.4	15.1	15.6	15.9	14.7	15.3	15.0	15.6	15.8
8H	14.8	15.4	15.1	15.6	15.9	14.7	15.3	15.0	15.5	15.8
12H	14.8	15.4	15.1	15.6	15.9	14.7	15.3	15.0	15.5	15.8
4H 2H	14.9	15.5	15.2	15.7	15.9	14.8	15.4	15.1	15.6	15.9
3H	15.0	15.5	15.3	15.8	16.0	14.9	15.4	15.2	15.7	15.9
4H	15.0	15.5	15.3	15.7	16.0	14.9	15.4	15.2	15.7	16.0
6H	14.9	15.4	15.3	15.7	16.1	14.8	15.3	15.2	15.6	16.0
8H	14.9	15.4	15.3	15.7	16.1	14.8	15.3	15.2	15.6	16.0
12H	15.0	15.3	15.4	15.7	16.1	14.9	15.2	15.3	15.6	16.0
8H 4H	14.9	15.3	15.2	15.6	16.0	14.8	15.2	15.2	15.5	15.9
6H	14.9	15.2	15.3	15.6	16.0	14.8	15.1	15.2	15.5	15.9
8H	14.9	15.2	15.4	15.6	16.1	14.8	15.1	15.3	15.5	16.0
12H	15.0	15.2	15.4	15.7	16.1	14.9	15.1	15.3	15.6	16.0
12H 4H	14.8	15.2	15.2	15.6	16.0	14.7	15.1	15.1	15.5	15.9
6H	14.8	15.2	15.3	15.6	16.0	14.8	15.1	15.2	15.5	15.9
8H	14.9	15.2	15.4	15.6	16.1	14.8	15.1	15.3	15.5	16.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.4 / - 2.5					+ 1.3 / - 2.3				
1.5H	+ 1.5 / - 1.8					+ 1.2 / - 1.5				
2.0H	+ 2.9 / - 3.1					+ 2.8 / - 2.8				

CIE Pub.117, 1342 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.0)
Area: 0.002601 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-16

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084 15R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

UTILIZATION FACTORS TABLE

Test:U:120.09V I:0.1157A P:13.780W PF:0.9906 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2214.411-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507160447
MFR.: RISE	SUR.: 0.002601m2	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	75	70	66	75	70	66	74	69	66	63
0.80	81	76	73	81	76	73	80	76	73	70
1.00	85	80	77	85	80	77	83	80	77	73
1.25	89	84	81	88	84	81	86	83	80	77
1.50	91	87	84	90	86	84	88	85	83	79
2.00	93	90	87	92	89	86	90	87	85	81
2.50	95	91	89	93	90	88	91	88	86	81
3.00	96	93	91	94	92	90	91	90	88	82
4.00	98	95	93	96	94	92	93	91	90	84
5.00	99	97	95	97	95	94	93	92	91	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3°C
Operators:zoe
Test Date:2025-7-16

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084 15R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

ISOCANDELA DIAGRAM

Test:U:120.09V I:0.1157A P:13.780W PF:0.9906 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2214.411-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507160447
MFR.: RISE	SUR.: 0.002601m2	Shielding Angle:

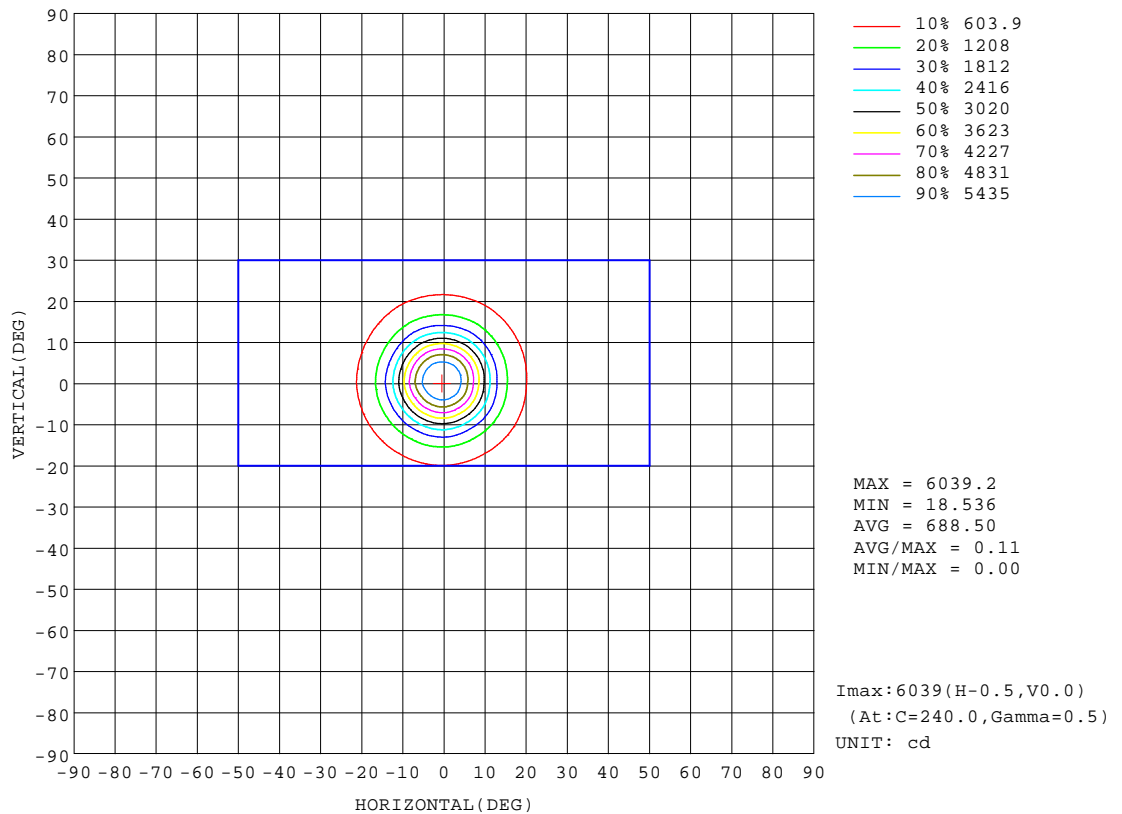


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3°C
Operators:zoe
Test Date:2025-7-16

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084 15R
DRIVER:PUP20A-1WMC 600mA
30minutes warm-up

AAI Figure

Test:U:120.09V I:0.1157A P:13.780W PF:0.9906 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2214.411-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507160447
MFR.: RISE	SUR.: 0.002601m2	Shielding Angle:

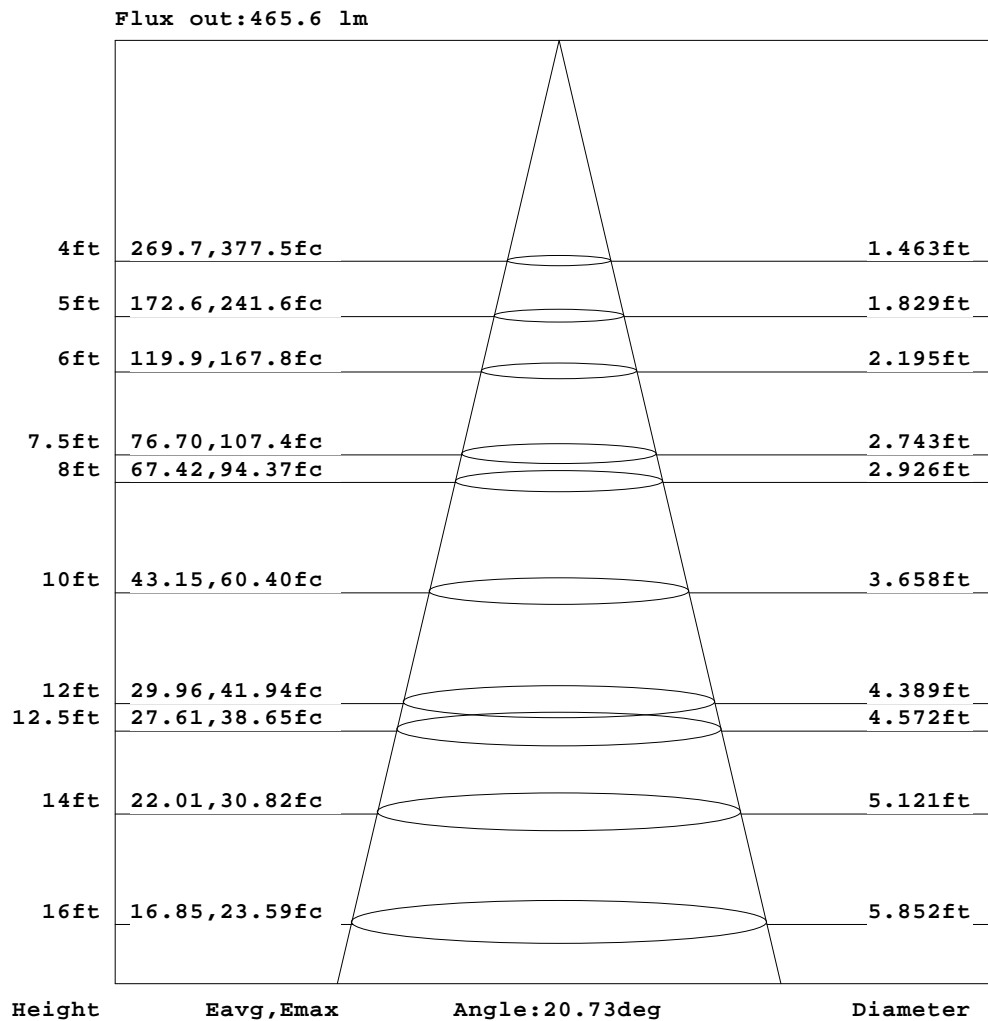

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3°C
Operators: zoe
Test Date: 2025-7-16

Range: 0 - 180DEG
Interval: 0.5DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRH-30G10T0-G-83 Ra: 90
LENS: PM-1084 15R
DRIVER: PUP20A-1WMC 600mA

30minutes warm-up

ISOLUX DIAGRAM

Test:U:120.09V I:0.1157A P:13.780W PF:0.9906 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2214.411-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507160447
MFR.: RISE	SUR.: 0.002601m2	Shielding Angle:

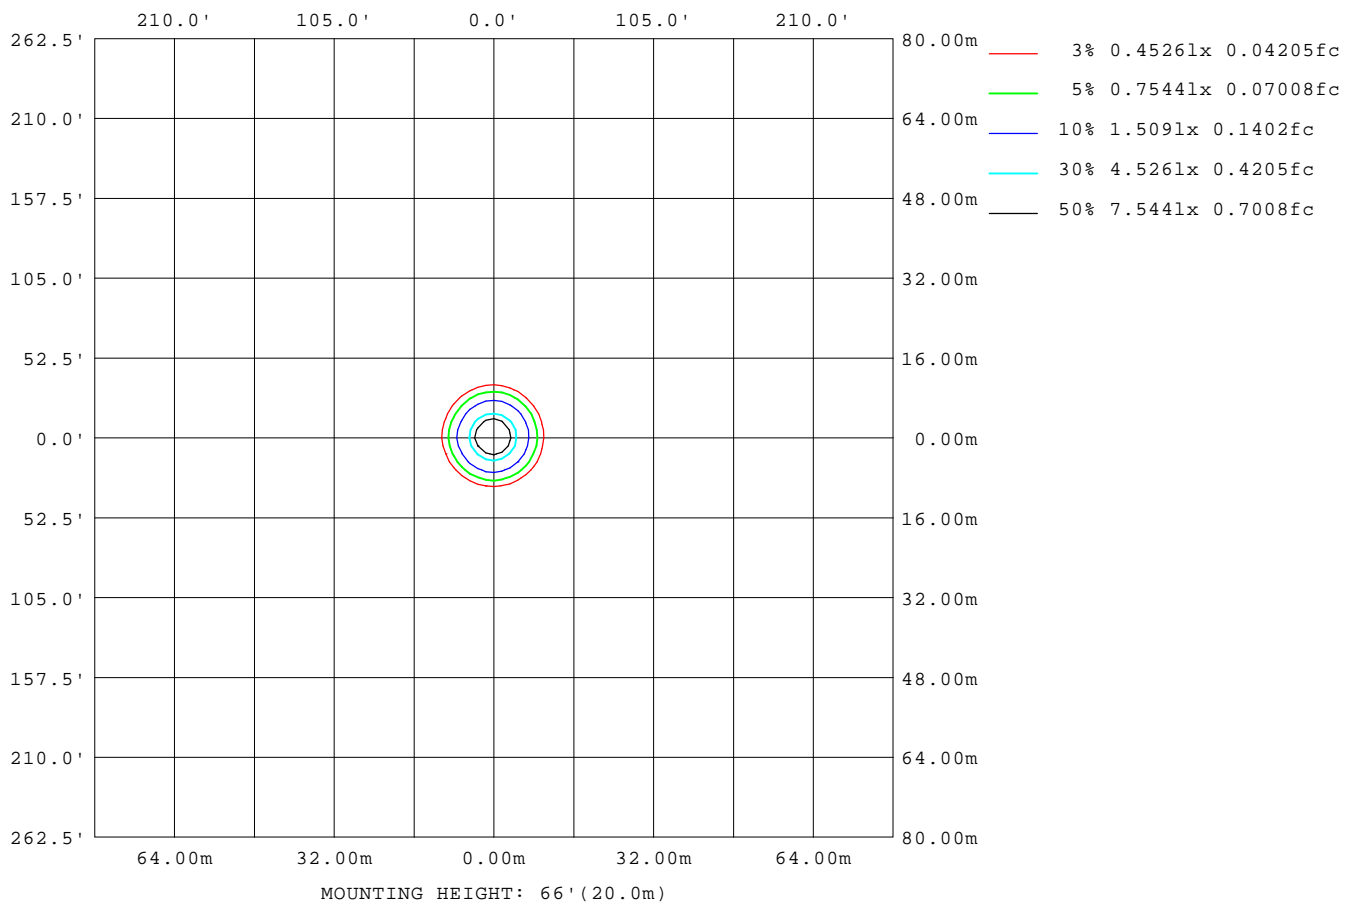

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3°C
Operators:zoe
Test Date:2025-7-16

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084 15R
DRIVER:PUP20A-1WMC 600mA
30minutes warm-up

LED Avg.L Report

Test:U:120.09V I:0.1157A P:13.780W PF:0.9906 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2214.411-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507160447
MFR.: RISE	SUR.: 0.002601m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	5401
L_0~180(75)av	2804
L_0~180(85)av	3994
L_90~270(65)av	5524
L_90~270(75)av	2804
L_90~270(85)av	3951
L_45(65)av	7318
L_45(75)av	3496
L_45(85)av	4170

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-16

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084 15R
DRIVER:PUP20A-1WMC 600mA
30minutes warm-up

Planar Illuminance Curve

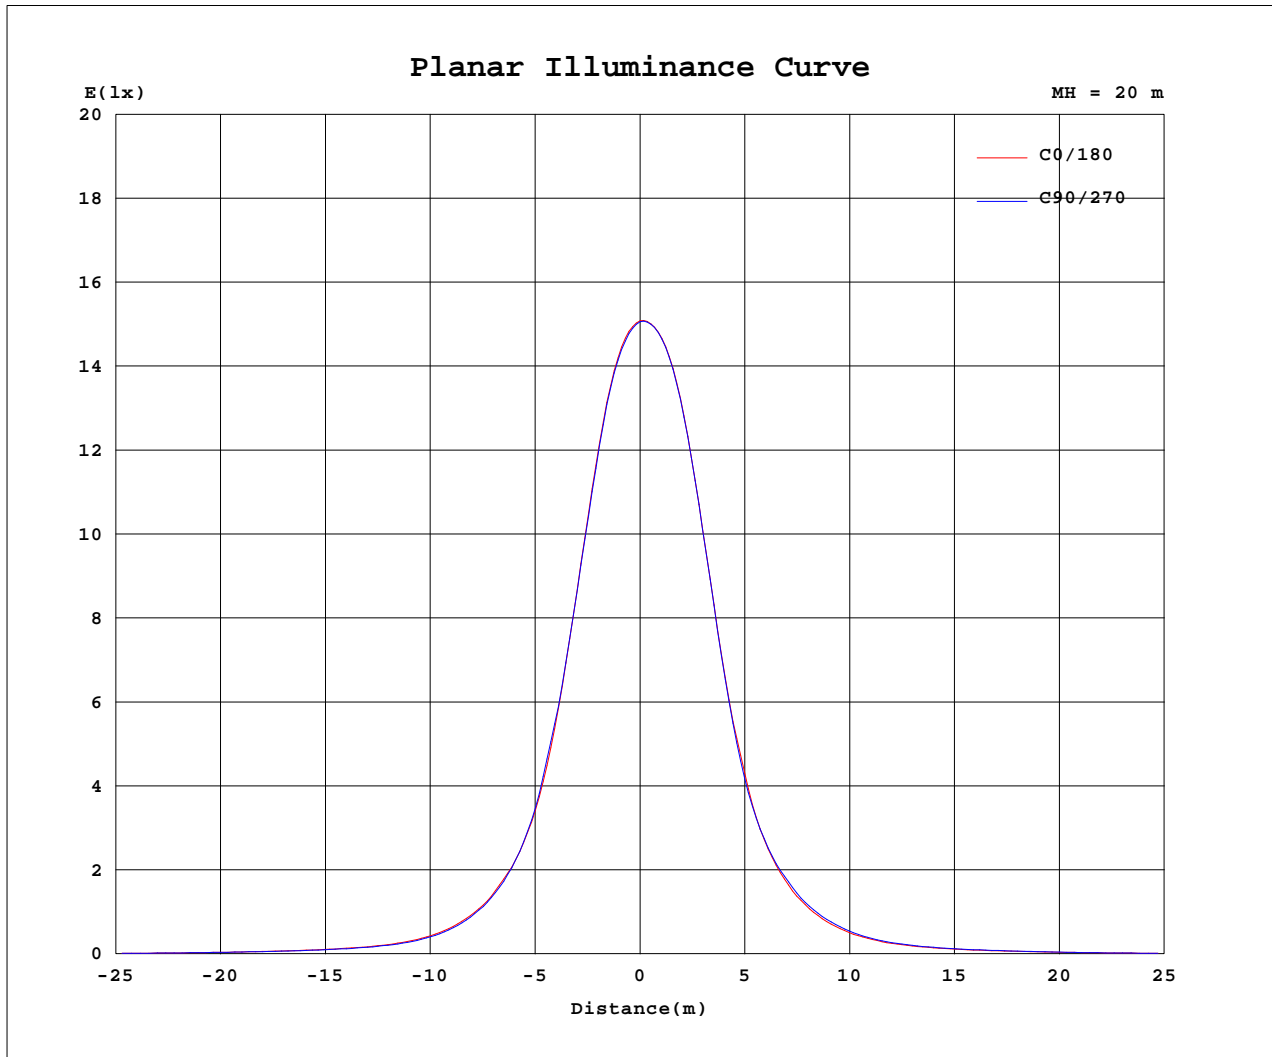

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3 °C
 Operators: zoe
 Test Date: 2025-7-16

Range: 0 - 180DEG
 Interval: 0.5DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: BXRH-30G10T0-G-83 Ra:90
 LENS: PM-1084 15R
 DRIVER: PUP20A-1WMC 600mA
 30minutes warm-up



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.09V I:0.1157A P:13.780W PF:0.9906 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2214.411-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507160447
MFR.: RISE	SUR.: 0.002601m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	6026	6026	6026	6026	6026	6026	6026	6026	6026	6026	6026	6026						
5	5122	5087	5038	5106	5178	5311	5502	5529	5558	5501	5436	5305						
10	2898	2862	2824	2913	3020	3196	3482	3529	3593	3476	3346	3143						
15	1281	1266	1235	1295	1339	1440	1576	1574	1623	1564	1515	1399						
20	611	595	569	596	613	662	726	736	766	767	729	667						
25	301	290	274	284	288	316	353	361	384	378	361	327						
30	160	155	147	150	150	162	182	189	202	195	186	172						
35	99.9	96.3	93.1	94.3	94.6	100	110	114	119	117	112	105						
40	70.0	68.6	66.6	66.2	66.0	68.9	73.4	78.8	81.4	79.7	77.5	73.9						
45	48.3	51.3	50.3	47.5	51.6	52.9	50.7	57.3	58.6	53.3	57.5	55.0						
50	29.6	36.1	35.6	30.6	37.6	37.6	31.8	40.0	39.2	31.9	39.9	37.5						
55	17.8	22.2	21.6	19.0	23.6	22.7	19.0	24.5	22.6	19.1	24.3	22.0						
60	10.2	13.3	13.4	11.2	14.4	13.9	10.9	14.1	14.0	11.3	14.6	13.4						
65	5.76	7.45	7.68	6.06	8.23	7.77	6.12	7.63	7.87	6.08	8.33	7.56						
70	3.22	4.10	3.45	3.26	4.18	4.13	3.26	4.07	4.04	3.22	4.17	4.00						
75	1.94	2.41	2.31	1.92	2.33	2.27	1.83	2.25	2.24	1.85	2.31	2.29						
80	1.36	1.55	1.52	1.30	1.44	1.35	1.10	1.30	1.29	1.14	1.39	1.43						
85	0.97	1.02	1.01	0.93	0.94	0.91	0.84	0.86	0.90	0.86	0.92	0.97						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-16

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084 15R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up