


## Luminaire Photograph

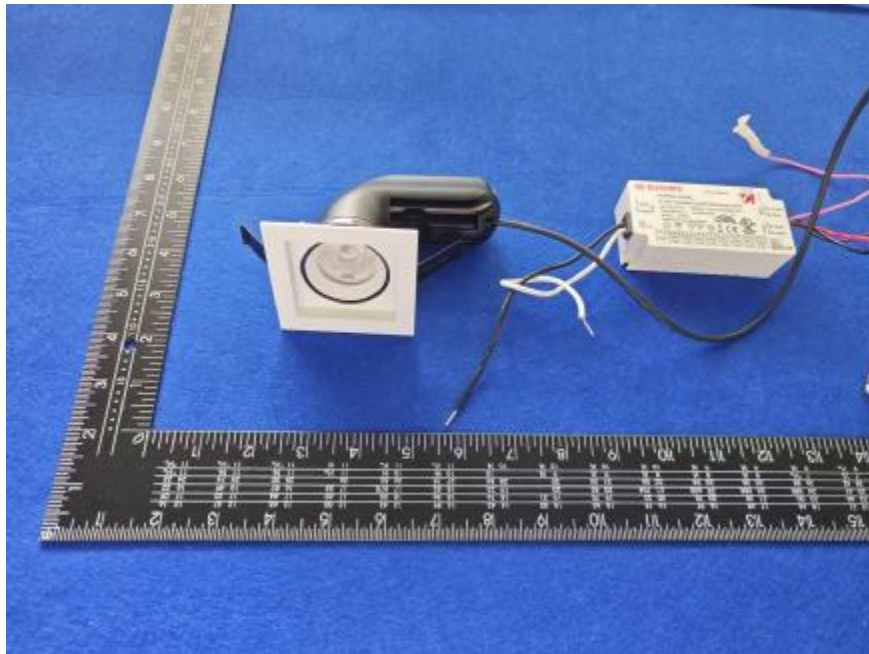

Light Output Ratio:	87.5%	
Luminaire Power:	13.96 W	
SHR Nominal:	0.50	Calculated using the TM5
SHR Maximum:	0.70	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2025-7-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRH-30G10T0-G-83 Ra:90  
LENS: PM-1084B 36R  
DRIVER: PUP20A-1WMC 600mA  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

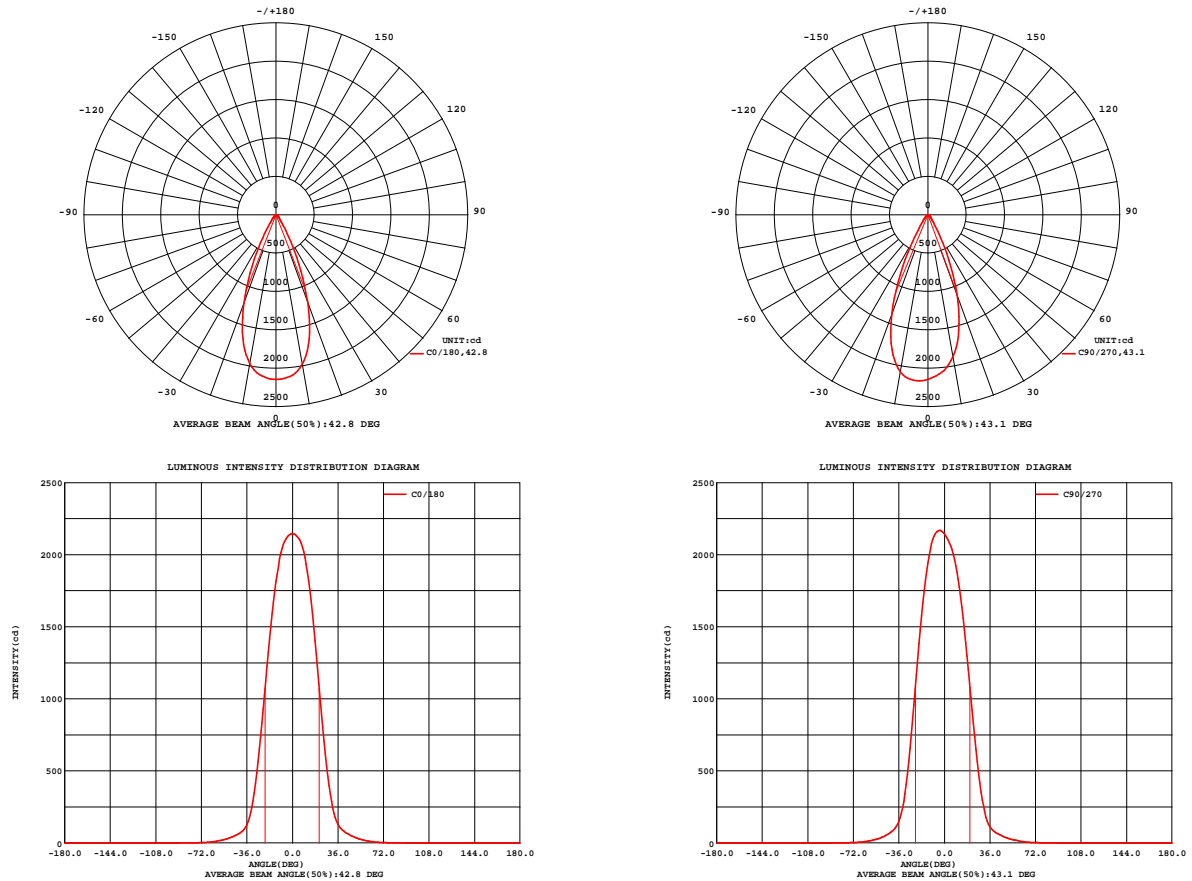


Fig. C0/C180

Fig. C90/C270

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2025-7-16


Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRH-30G10T0-G-83 Ra: 90  
LENS: PM-1084B 36R  
DRIVER: PUP20A-1WMC 600mA

30minutes warm-up

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.17V I:0.1170A P:13.956W PF:0.9913 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2214.411-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507160449
MFR.: RISE	SUR.: 0.002601m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 84.15 lm/W			
MODEL	Brideglux	I <sub>max</sub> (cd)	2168	S/MH(C0/180)	0.67
NOMINAL POWER(W)	13	LOR(%)	87.5	S/MH(C90/270)	0.70
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1174.4	UP,DN(C0-180)	0.0,41.1
NOMINAL FLUX(lm)	1342.44	CIE CLASS	DIRECT	UP,DN(C180-360)	0.0,46.4
LAMPS INSIDE	1	up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120	down(%)	87.5	CIBSE SHR MAX	0.70

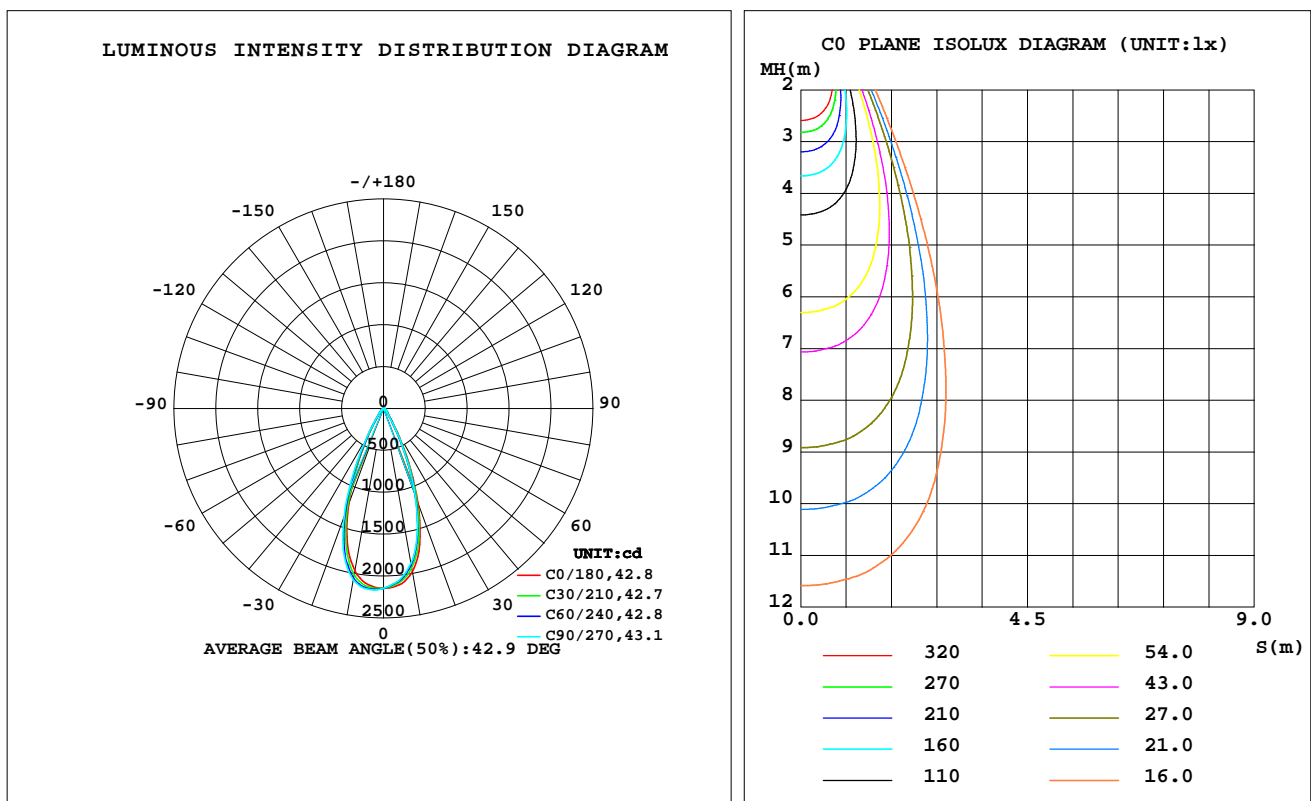

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-7-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90  
LENS:PM-1084B 36R  
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

	C0	C45	C90	C135	C180	C225	C270	C315		zone	total	%lum,lamp
10	1980	1913	1877	1887	1971	2039	2078	2058	0- 10	197.4	197.4	16.8,14.7
20	1207	1140	1110	1114	1226	1306	1384	1355	10- 20	456.7	654.1	55.7,48.7
30	338.2	305.9	296.1	297.7	348.1	371.0	406.6	394.6	20- 30	334.7	988.8	84.2,73.7
40	87.15	82.19	76.41	75.08	78.11	86.66	92.40	92.42	30- 40	105.2	1094	93.2,81.5
50	36.88	40.67	33.32	38.05	33.72	41.54	36.47	44.99	40- 50	45.07	1139	97,84.9
60	13.60	16.49	12.55	15.42	12.30	16.37	13.70	18.12	50- 60	23.03	1162	99,86.6
70	3.728	4.554	3.431	4.223	3.395	4.459	3.773	4.980	60- 70	8.683	1171	99.7,87.2
80	1.418	1.628	1.435	1.518	1.256	1.435	1.235	1.580	70- 80	2.660	1173	99.9,87.4
90	0	0	0	0	0	0	0	0	80- 90	0.9642	1174	100,87.5
100	0	0	0	0	0	0	0	0	90-100	0	1174	100,87.5
110	0	0	0	0	0	0	0	0	100-110	0	1174	100,87.5
120	0	0	0	0	0	0	0	0	110-120	0	1174	100,87.5
130	0	0	0	0	0	0	0	0	120-130	0	1174	100,87.5
140	0	0	0	0	0	0	0	0	130-140	0	1174	100,87.5
150	0	0	0	0	0	0	0	0	140-150	0	1174	100,87.5
160	0	0	0	0	0	0	0	0	150-160	0	1174	100,87.5
170	0	0	0	0	0	0	0	0	160-170	0	1174	100,87.5
180	0	0	0	0	0	0	0	0	170-180	0	1174	100,87.5
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-7-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90  
LENS:PM-1084B 36R  
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

### LUMINANCE LIMITATION CURVES

Test:U:120.17V I:0.1170A P:13.956W PF:0.9913 Freq:59.98Hz  
Lamp Flux:1342.44x1 lm

NAME: 2214.411-LEA-28-H0

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2507160449

MFR.: RISE

SUR.: 0.002601m2

Shielding Angle:

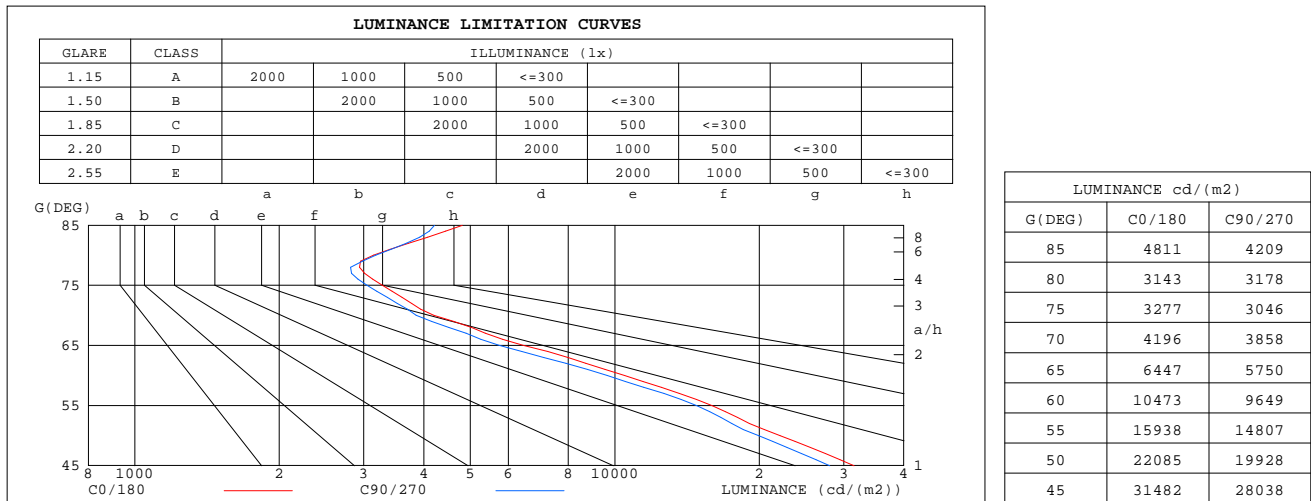

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-7-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90  
LENS:PM-1084B 36R  
DRIVER:PUP20A-1WMC 600mA


30minutes warm-up

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.17V I:0.1170A P:13.956W PF:0.9913 Freq:59.98Hz  
Lamp Flux:1342.44x1 lm

NAME: 2214.411-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507160449
MFR.: RISE	SUR.: 0.002601m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

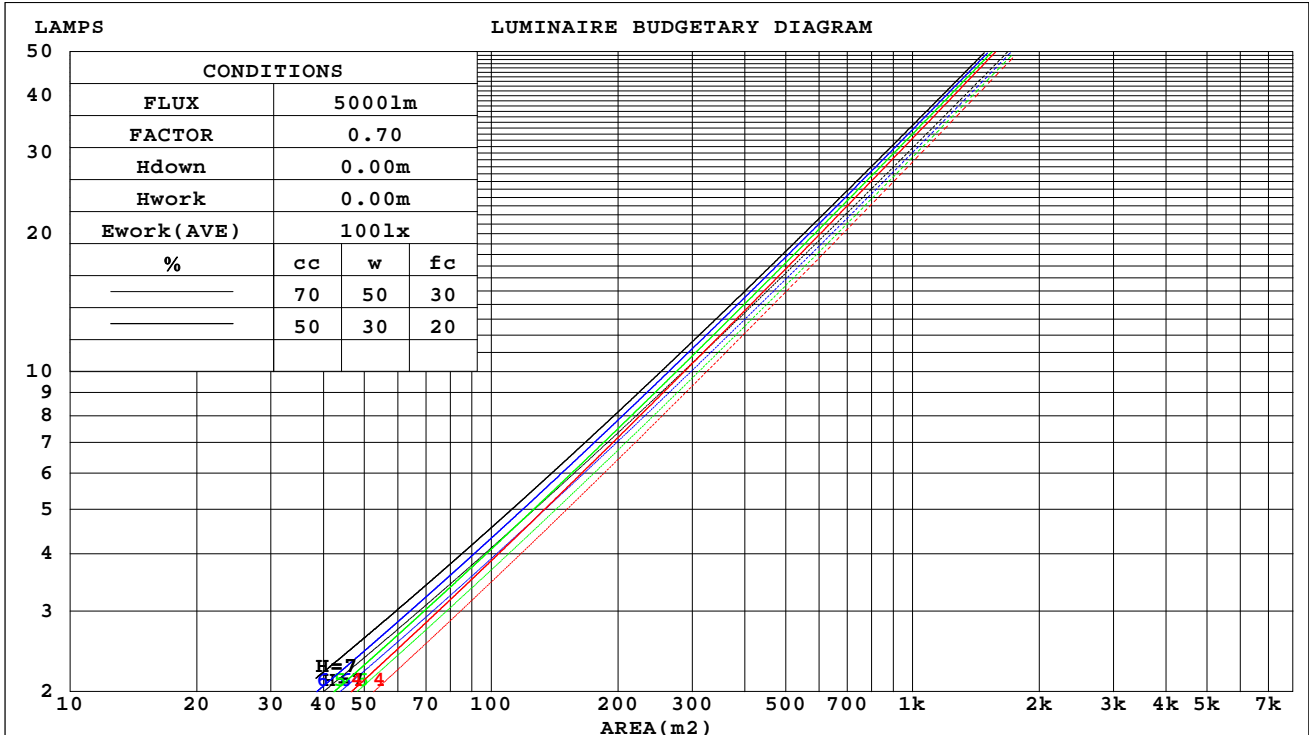

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-7-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90  
LENS:PM-1084B 36R  
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

### WEC AND CCEC

Test:U:120.17V I:0.1170A P:13.956W PF:0.9913 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2214.411-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507160449
MFR.: RISE	SUR.: 0.002601m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0	
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
fc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.145	.082	.026	.139	.079	.025	.128	.073	.023	.118	.068	.022	.109	.063	.020		
2.0	.137	.075	.023	.132	.073	.022	.123	.068	.021	.115	.064	.020	.107	.060	.019		
3.0	.129	.069	.021	.125	.067	.020	.118	.064	.019	.110	.061	.019	.104	.057	.018		
4.0	.123	.064	.019	.119	.062	.018	.112	.060	.018	.106	.057	.017	.100	.055	.017		
5.0	.116	.059	.017	.113	.058	.017	.107	.056	.016	.102	.054	.016	.097	.052	.016		
6.0	.111	.055	.016	.108	.055	.016	.103	.053	.015	.098	.051	.015	.094	.049	.015		
7.0	.105	.052	.015	.103	.051	.015	.099	.050	.014	.095	.048	.014	.091	.047	.014		
8.0	.101	.049	.014	.099	.049	.014	.095	.047	.014	.091	.046	.013	.088	.045	.013		
9.0	.096	.047	.013	.095	.046	.013	.091	.045	.013	.088	.044	.013	.085	.043	.012		
10.0	.092	.044	.012	.091	.044	.012	.088	.043	.012	.085	.042	.012	.082	.041	.012		

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.167	.167	.167	.142	.142	.142	.097	.097	.097	.056	.056	.056	.018	.018	.018	
1.0	.149	.138	.128	.127	.118	.110	.087	.081	.076	.050	.047	.044	.016	.015	.014	
2.0	.135	.116	.100	.116	.100	.086	.079	.069	.060	.046	.040	.035	.015	.013	.012	
3.0	.123	.099	.080	.106	.086	.069	.073	.059	.049	.042	.035	.029	.013	.011	.009	
4.0	.114	.086	.065	.098	.075	.057	.067	.052	.040	.039	.030	.024	.012	.010	.008	
5.0	.106	.076	.054	.091	.066	.047	.062	.046	.033	.036	.027	.020	.012	.009	.006	
6.0	.099	.068	.045	.085	.058	.039	.058	.041	.028	.034	.024	.017	.011	.008	.005	
7.0	.093	.061	.038	.080	.053	.033	.055	.037	.024	.032	.022	.014	.010	.007	.005	
8.0	.087	.055	.033	.075	.048	.029	.052	.034	.020	.030	.020	.012	.010	.006	.004	
9.0	.083	.050	.029	.071	.044	.025	.049	.031	.018	.029	.018	.011	.009	.006	.004	
10.0	.079	.047	.025	.068	.040	.022	.047	.028	.016	.027	.017	.009	.009	.006	.003	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-7-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90  
LENS:PM-1084B 36R  
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

## UGR(Unified Glare Rating) Table

Test:U:120.17V I:0.1170A P:13.956W PF:0.9913 Freq:59.98Hz Lamp Flux:1342.44x1 lm										
NAME: 2214.411-LEA-28-H0					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2507160449		
MFR.: RISE					SUR.: 0.002601m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.8	17.7	17.0	17.8	18.0	16.2	17.0	16.4	17.2	17.3
3H	16.8	17.6	17.0	17.8	18.0	16.1	16.9	16.4	17.1	17.3
4H	16.7	17.5	17.0	17.7	17.9	16.1	16.8	16.4	17.0	17.3
6H	16.7	17.4	17.0	17.6	17.9	16.0	16.7	16.3	17.0	17.2
8H	16.7	17.3	17.0	17.6	17.8	16.0	16.7	16.3	16.9	17.2
12H	16.7	17.3	17.0	17.6	17.8	16.0	16.6	16.3	16.9	17.2
4H 2H	16.8	17.5	17.1	17.7	18.0	16.2	16.9	16.4	17.1	17.3
3H	16.8	17.4	17.1	17.7	18.0	16.2	16.8	16.5	17.1	17.4
4H	16.8	17.3	17.1	17.6	18.0	16.2	16.7	16.5	17.0	17.3
6H	16.7	17.2	17.1	17.6	17.9	16.1	16.6	16.5	17.0	17.3
8H	16.7	17.2	17.1	17.5	17.9	16.1	16.6	16.5	16.9	17.3
12H	16.7	17.1	17.1	17.5	17.9	16.1	16.5	16.5	16.9	17.3
8H 4H	16.7	17.1	17.0	17.5	17.9	16.1	16.5	16.4	16.9	17.3
6H	16.6	17.0	17.1	17.4	17.8	16.0	16.4	16.5	16.8	17.2
8H	16.6	17.0	17.1	17.4	17.8	16.1	16.4	16.5	16.8	17.3
12H	16.7	17.0	17.1	17.4	17.9	16.1	16.4	16.6	16.8	17.3
12H 4H	16.6	17.1	17.0	17.4	17.8	16.0	16.5	16.4	16.8	17.2
6H	16.6	16.9	17.0	17.4	17.8	16.0	16.4	16.5	16.8	17.2
8H	16.6	16.9	17.1	17.4	17.8	16.0	16.3	16.5	16.8	17.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.6 / - 2.5					+ 1.4 / - 2.4				
1.5H	+ 2.2 / - 1.7					+ 1.8 / - 1.7				
2.0H	+ 2.7 / - 2.9					+ 2.6 / - 2.9				

CIE Pub.117, 1342 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.0)  
Area: 0.002601 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-7-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90  
LENS:PM-1084B 36R  
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up



### UTILIZATION FACTORS TABLE

Test:U:120.17V I:0.1170A P:13.956W PF:0.9913 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2214.411-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507160449
MFR.: RISE	SUR.: 0.002601m2	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	76	71	67	76	71	67	75	70	67	64
0.80	83	78	74	82	77	74	81	77	74	71
1.00	87	82	79	86	81	78	85	81	78	75
1.25	90	86	83	89	85	82	88	84	82	78
1.50	93	88	86	92	88	85	90	87	84	80
2.00	95	91	89	94	90	88	91	89	87	82
2.50	96	93	90	95	92	90	92	90	88	83
3.00	98	95	92	96	94	91	93	91	90	84
4.00	100	97	95	98	96	94	95	93	92	85
5.00	101	99	97	99	97	96	95	94	93	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3°C  
Operators:zoe  
Test Date:2025-7-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90  
LENS:PM-1084B 36R  
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:120.17V I:0.1170A P:13.956W PF:0.9913 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2214.411-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507160449
MFR.: RISE	SUR.: 0.002601m2	Shielding Angle:

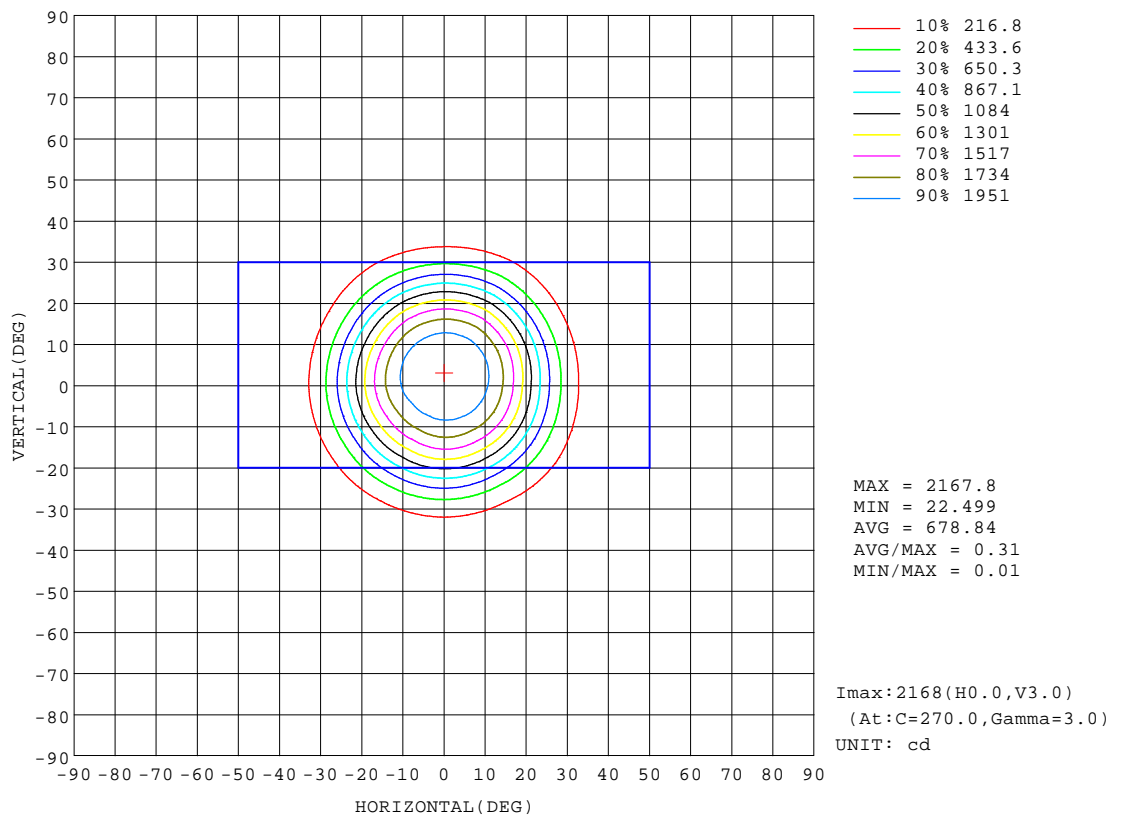


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-7-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90  
LENS:PM-1084B 36R  
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

## AAI Figure

Test:U:120.17V I:0.1170A P:13.956W PF:0.9913 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2214.411-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507160449
MFR.: RISE	SUR.: 0.002601m2	Shielding Angle:

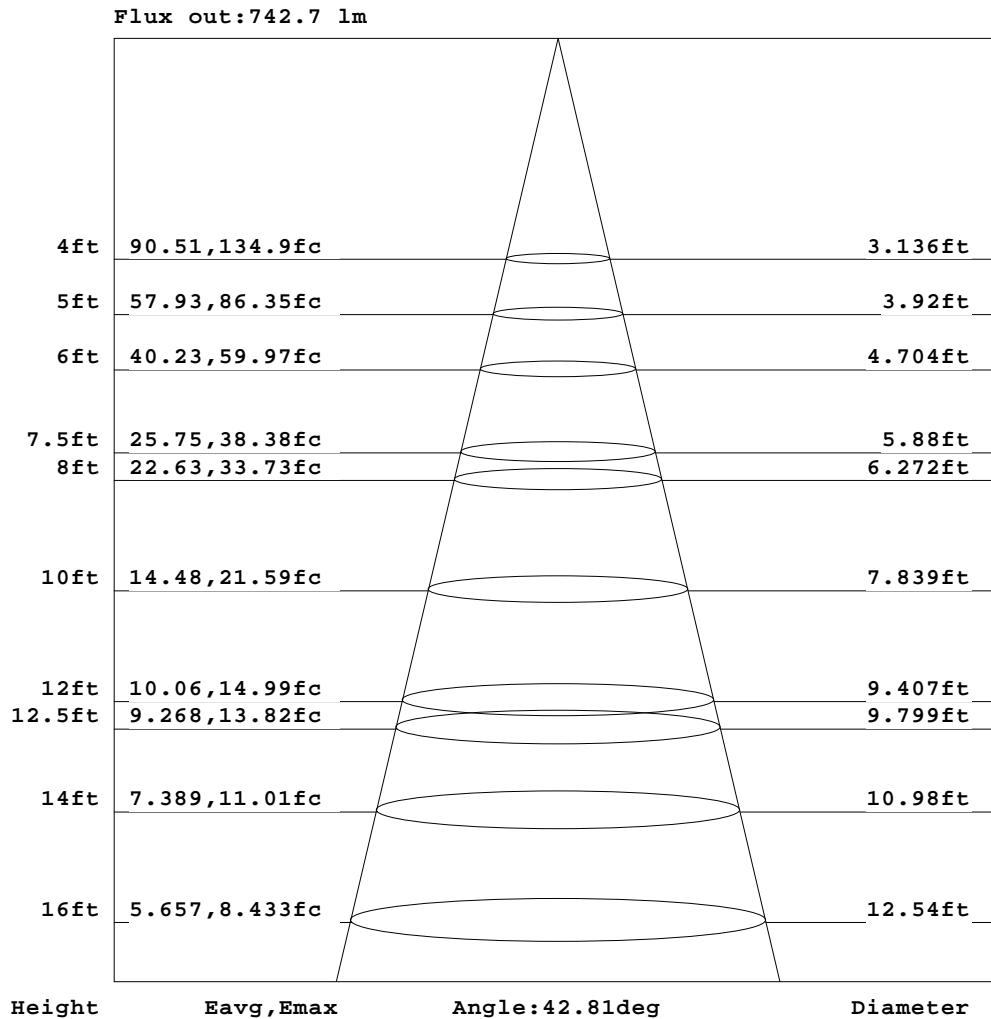

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2025-7-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRH-30G10T0-G-83 Ra: 90  
LENS: PM-1084B 36R  
DRIVER: PUP20A-1WMC 600mA

30minutes warm-up

## ISOLUX DIAGRAM

Test:U:120.17V I:0.1170A P:13.956W PF:0.9913 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2214.411-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507160449
MFR.: RISE	SUR.: 0.002601m2	Shielding Angle:

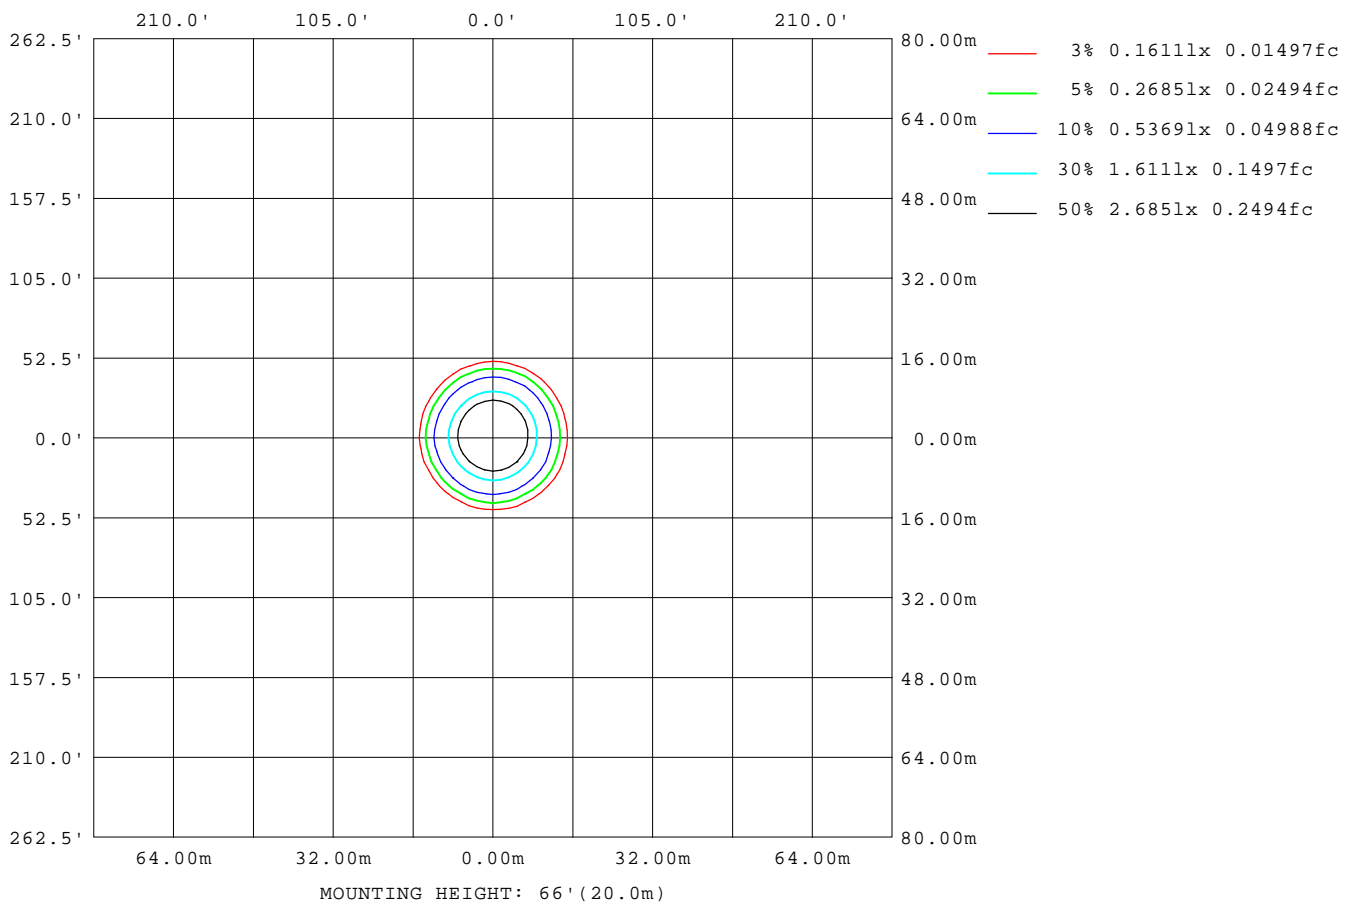

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3°C  
Operators:zoe  
Test Date:2025-7-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90  
LENS:PM-1084B 36R  
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

## LED Avg.L Report

Test:U:120.17V I:0.1170A P:13.956W PF:0.9913 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2214.411-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507160449
MFR.: RISE	SUR.: 0.002601m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	6103
L_0~180(75)av	3083
L_0~180(85)av	4348
L_90~270(65)av	6102
L_90~270(75)av	3112
L_90~270(85)av	4251
L_45(65)av	8563
L_45(75)av	3841
L_45(85)av	4490

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-7-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90  
LENS:PM-1084B 36R  
DRIVER:PUP20A-1WMC 600mA  
30minutes warm-up

## Planar Illuminance Curve

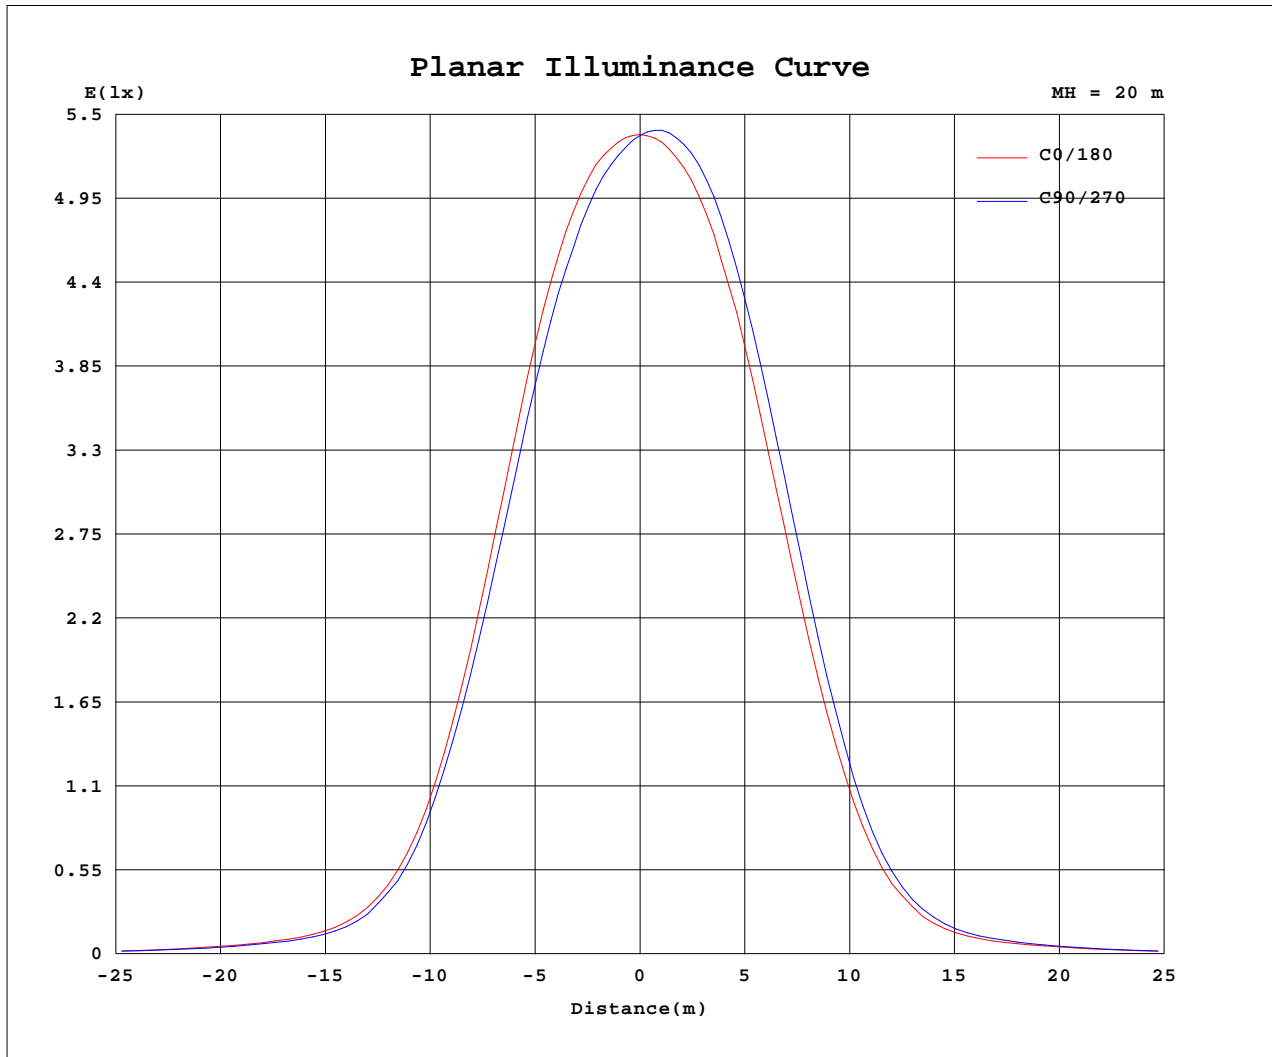

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators: zoe  
 Test Date: 2025-7-16

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: BXRH-30G10T0-G-83 Ra:90  
 LENS: PM-1084B 36R  
 DRIVER: PUP20A-1WMC 600mA

30minutes warm-up



## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.17V I:0.1170A P:13.956W PF:0.9913 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2214.411-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507160449
MFR.: RISE	SUR.: 0.002601m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2145	2145	2145	2145	2145	2145	2145	2145	2145	2145	2145	2145						
5	2113	2090	2070	2062	2061	2079	2108	2132	2156	2163	2162	2143						
10	1980	1930	1895	1877	1872	1902	1971	2019	2059	2078	2076	2039						
15	1677	1629	1570	1560	1535	1581	1671	1721	1790	1817	1828	1767						
20	1207	1166	1113	1110	1091	1137	1226	1264	1347	1384	1393	1316						
25	707	682	637	649	637	662	738	760	816	856	863	790						
30	338	323	289	296	291	304	348	355	387	407	416	373						
35	153	147	132	131	127	131	147	152	167	176	180	164						
40	87.2	84.7	79.7	76.4	74.3	75.9	78.1	83.8	89.5	92.4	93.3	91.5						
45	57.8	59.7	56.6	51.6	54.0	54.6	52.2	57.4	61.1	58.7	64.2	63.6						
50	36.9	42.2	39.2	33.3	38.4	37.7	33.7	41.2	41.9	36.5	45.4	44.5						
55	23.7	27.1	25.0	22.1	25.1	24.1	21.9	26.3	25.6	23.4	29.2	27.7						
60	13.6	17.2	15.8	12.5	15.9	15.0	12.3	16.4	16.3	13.7	18.6	17.7						
65	7.08	9.38	8.71	6.32	8.63	8.06	6.34	8.82	8.97	7.09	10.4	9.95						
70	3.73	4.74	4.37	3.43	4.26	4.18	3.39	4.41	4.51	3.77	5.07	4.89						
75	2.20	2.65	2.52	2.05	2.42	2.34	1.95	2.45	2.51	2.14	2.71	2.65						
80	1.42	1.65	1.61	1.44	1.56	1.48	1.26	1.43	1.44	1.24	1.58	1.58						
85	1.09	1.10	1.06	0.95	0.91	0.90	0.88	0.92	1.00	0.97	1.07	1.14						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-7-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90  
LENS:PM-1084B 36R  
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up