


Luminaire Photograph

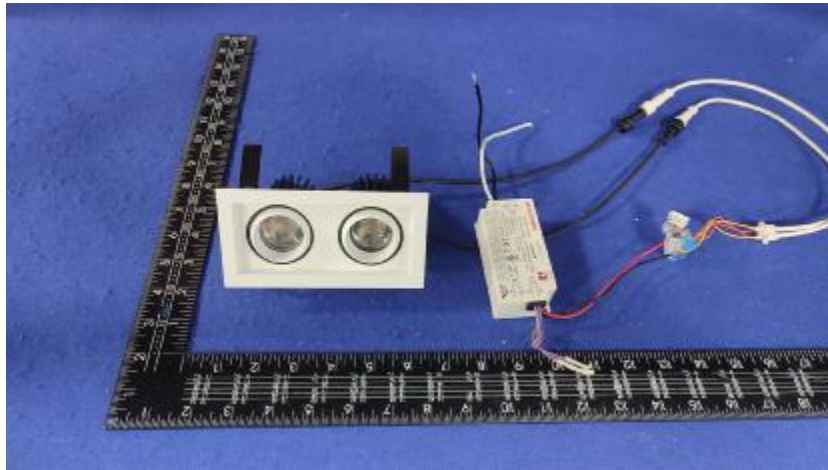

Light Output Ratio:	80.9%	
Luminaire Power:	21.68 W	
SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	1.00	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Zoe
Test Date: 2022-12-23

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084A 24R
DRIVER: PUP20A-1WMC 500mA
30minutes warm-up

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

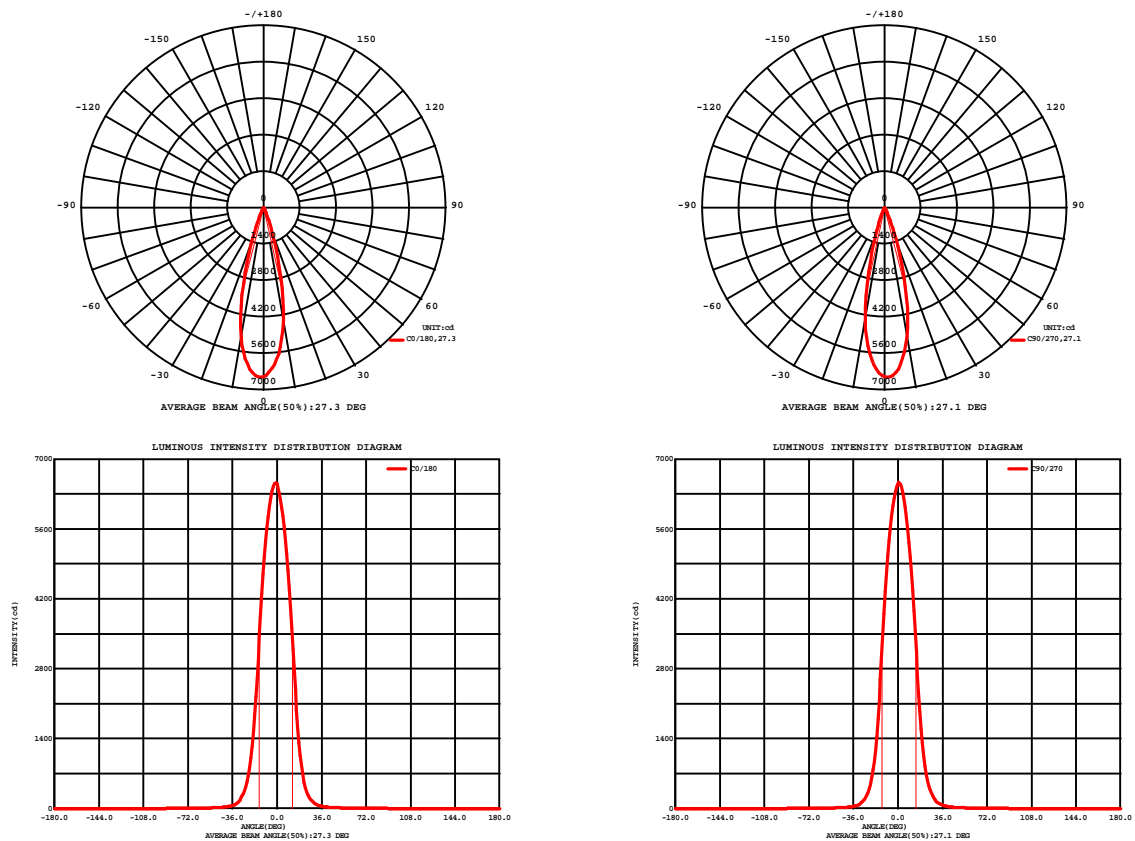


Fig. C0/C180

Fig. C90/C270

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Zoe
Test Date: 2022-12-23

C Range: 0 - 180DEG
C Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084A 24R
DRIVER: PUP20A-1WMC 500mA
30minutes warm-up

```

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
          LENS: PM-1084A 24R
          DRIVER:PUP20A-1WMC 500mA
          30minutes warm-up

```

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	4399	4726	5045	5117	5046	4655	4334	4299	0- 10	533.6	533.6	35,28.3
20	876.1	1074	1303	1320	1234	939.3	778.6	770.0	10- 20	717.4	1251	82.1,66.4
30	110.6	139.0	177.6	185.9	156.7	121.7	102.9	103.6	20- 30	187.6	1439	94.4,76.4
40	31.02	35.53	40.73	40.58	36.54	30.91	27.87	28.83	30- 40	42.46	1481	97.2,78.6
50	13.71	14.66	15.46	15.16	14.76	13.64	12.82	13.16	40- 50	16.40	1497	98.3,79.5
60	10.06	10.51	10.83	10.68	10.36	9.881	9.469	9.664	50- 60	10.55	1508	99,80
70	7.034	7.596	8.008	7.859	7.510	6.907	6.523	6.644	60- 70	8.736	1517	99.5,80.5
80	2.961	3.474	3.898	3.837	3.568	2.951	2.231	2.596	70- 80	5.540	1522	99.9,80.8
90	0	0	0	0	0	0	0	0	80- 90	1.324	1524	100,80.9
100	0	0	0	0	0	0	0	0	90-100	0	1524	100,80.9
110	0	0	0	0	0	0	0	0	100-110	0	1524	100,80.9
120	0	0	0	0	0	0	0	0	110-120	0	1524	100,80.9
130	0	0	0	0	0	0	0	0	120-130	0	1524	100,80.9
140	0	0	0	0	0	0	0	0	130-140	0	1524	100,80.9
150	0	0	0	0	0	0	0	0	140-150	0	1524	100,80.9
160	0	0	0	0	0	0	0	0	150-160	0	1524	100,80.9
170	0	0	0	0	0	0	0	0	160-170	0	1524	100,80.9
180	0	0	0	0	0	0	0	0	170-180	0	1524	100,80.9
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-23

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084A 24R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up

LUMINANCE LIMITATION CURVES

Test:U:119.95V I:0.1815A P:21.676W PF:0.9946 Freq:59.98Hz Lamp Flux:1884x1 lm		
NAME: 2214.412-2-LEA-09	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2212231381
MFR.: RISE	SUR.:0.005865m2	Shielding Angle:

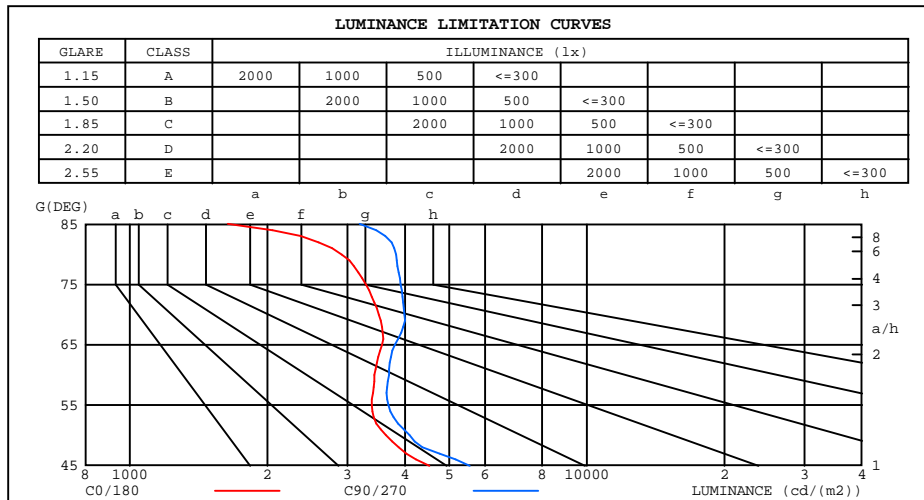

LUMINANCE cd/(m2)		
G(180)	C0/180	C90/270
85	1639	3191
80	2912	3824
75	3285	3922
70	3513	3989
65	3568	3805
60	3436	3690
55	3386	3685
50	3642	4097
45	4525	5552


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-23

G Range: 0 - 180DEG
G Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084A 24R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.95V I:0.1815A P:21.676W PF:0.9946 Freq:59.98Hz Lamp Flux:1884x1 lm		
NAME: 2214.412-2-LEA-09	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2212231381
MFR.: RISE	SUR.:0.005865m2	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	.96	.96	.96	.94	.94	.94	.90	.90	.90	.86	.86	.86	.83	.83	.83	.81
1.0	.91	.90	.88	.89	.88	.87	.86	.85	.84	.83	.82	.82	.81	.80	.79	.78
2.0	.87	.84	.82	.85	.83	.81	.83	.81	.80	.81	.79	.78	.78	.77	.76	.75
3.0	.83	.80	.78	.82	.79	.77	.80	.78	.76	.78	.76	.75	.76	.75	.74	.73
4.0	.80	.77	.74	.79	.76	.74	.77	.75	.73	.76	.74	.72	.74	.73	.71	.70
5.0	.77	.74	.71	.76	.73	.71	.75	.72	.70	.74	.71	.70	.73	.71	.69	.68
6.0	.74	.71	.68	.74	.71	.68	.73	.70	.68	.72	.69	.67	.71	.69	.67	.66
7.0	.72	.69	.66	.71	.68	.66	.71	.68	.66	.70	.67	.65	.69	.67	.65	.64
8.0	.70	.66	.64	.69	.66	.64	.69	.66	.64	.68	.65	.64	.67	.65	.63	.63
9.0	.68	.64	.62	.67	.64	.62	.67	.64	.62	.66	.64	.62	.66	.63	.62	.61
10.0	.66	.63	.61	.66	.63	.60	.65	.62	.60	.65	.62	.60	.64	.62	.60	.59

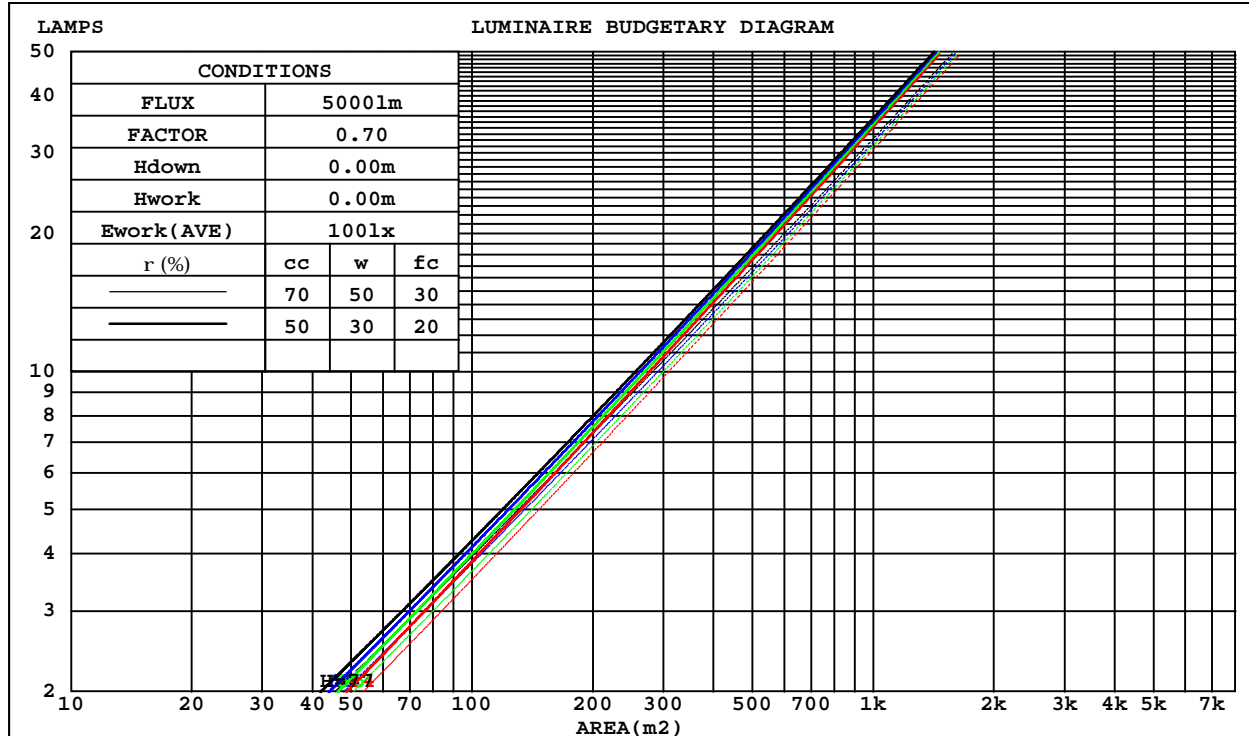

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-23

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084A 24R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up

WEC AND CCEC

Test:U:119.95V I:0.1815A P:21.676W PF:0.9946 Freq:59.98Hz Lamp Flux:1884x1 lm		
NAME: 2214.412-2-LEA-09	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2212231381
MFR.: RISE	SUR.:0.005865m2	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.113	.064	.020	.108	.062	.020	.098	.056	.018	.089	.051	.016	.080	.047	.015	
2.0	.105	.057	.018	.100	.055	.017	.092	.051	.016	.084	.047	.015	.077	.044	.014	
3.0	.097	.052	.016	.094	.050	.015	.087	.047	.014	.080	.044	.014	.074	.041	.013	
4.0	.091	.047	.014	.088	.046	.014	.082	.043	.013	.077	.041	.012	.072	.039	.012	
5.0	.085	.043	.013	.083	.042	.012	.078	.040	.012	.073	.039	.011	.069	.037	.011	
6.0	.081	.040	.012	.078	.040	.011	.074	.038	.011	.070	.036	.011	.066	.035	.010	
7.0	.076	.038	.011	.074	.037	.011	.071	.036	.010	.067	.034	.010	.064	.033	.010	
8.0	.073	.035	.010	.071	.035	.010	.068	.034	.010	.065	.033	.009	.062	.032	.009	
9.0	.069	.034	.009	.068	.033	.009	.065	.032	.009	.062	.031	.009	.060	.030	.009	
10.0	.066	.032	.009	.065	.031	.009	.062	.031	.009	.060	.030	.008	.058	.029	.008	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.154	.154	.154	.132	.132	.132	.090	.090	.090	.052	.052	.052	.017	.017	.017	
1.0	.136	.127	.120	.117	.109	.103	.080	.075	.071	.046	.044	.041	.015	.014	.013	
2.0	.122	.107	.095	.104	.092	.082	.071	.064	.057	.041	.037	.034	.013	.012	.011	
3.0	.110	.092	.077	.094	.079	.067	.065	.055	.047	.037	.032	.028	.012	.010	.009	
4.0	.100	.079	.064	.085	.068	.055	.059	.048	.039	.034	.028	.023	.011	.009	.008	
5.0	.091	.069	.053	.078	.060	.046	.054	.042	.033	.031	.025	.019	.010	.008	.006	
6.0	.084	.061	.045	.072	.053	.039	.050	.037	.028	.029	.022	.016	.009	.007	.005	
7.0	.078	.055	.038	.067	.047	.033	.046	.033	.024	.027	.020	.014	.009	.006	.005	
8.0	.072	.049	.033	.062	.043	.029	.043	.030	.020	.025	.018	.012	.008	.006	.004	
9.0	.068	.044	.029	.058	.039	.025	.040	.027	.018	.024	.016	.011	.008	.005	.004	
10.0	.064	.041	.025	.055	.035	.022	.038	.025	.016	.022	.015	.009	.007	.005	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-23

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084A 24R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:119.95V I:0.1815A P:21.676W PF:0.9946 Freq:59.98Hz Lamp Flux:1884x1 lm										
NAME: 2214.412-2-LEA-09					TYPE:			WEIGHT:		
SPEC.:3000K					DIM.:			SERIAL No.:2212231381		
MFR.: RISE					SUR.:0.005865m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	8.2	8.9	8.4	9.0	9.2	9.1	9.8	9.3	9.9	10.1
3H	9.5	10.1	9.7	10.3	10.5	10.3	10.9	10.5	11.1	11.3
4H	10.1	10.6	10.3	10.8	11.1	10.9	11.4	11.1	11.7	11.9
6H	10.5	11.0	10.7	11.3	11.5	11.4	11.9	11.6	12.1	12.4
8H	10.6	11.1	10.9	11.4	11.6	11.5	12.1	11.8	12.3	12.6
12H	10.6	11.1	10.9	11.4	11.7	11.6	12.2	12.0	12.4	12.7
4H 2H	8.7	9.3	9.0	9.5	9.7	9.5	10.0	9.7	10.3	10.5
3H	10.2	10.8	10.6	11.0	11.3	10.9	11.4	11.2	11.7	11.9
4H	10.9	11.4	11.3	11.7	12.0	11.6	12.1	11.9	12.4	12.7
6H	11.5	11.9	11.8	12.2	12.6	12.2	12.7	12.6	13.0	13.3
8H	11.6	12.0	12.0	12.4	12.7	12.5	12.9	12.9	13.2	13.6
12H	11.7	12.0	12.1	12.4	12.8	12.6	13.0	13.0	13.4	13.7
8H 4H	11.2	11.6	11.6	12.0	12.3	11.8	12.2	12.2	12.6	12.9
6H	11.9	12.2	12.3	12.6	13.0	12.6	12.9	13.0	13.3	13.7
8H	12.1	12.4	12.6	12.8	13.3	12.9	13.2	13.4	13.6	14.1
12H	12.2	12.5	12.7	12.9	13.4	13.1	13.4	13.6	13.8	14.3
12H 4H	11.2	11.6	11.7	12.0	12.4	11.8	12.2	12.2	12.6	12.9
6H	12.0	12.3	12.4	12.7	13.1	12.6	12.9	13.1	13.3	13.8
8H	12.2	12.5	12.7	12.9	13.4	13.0	13.2	13.4	13.7	14.1
Variations with the observer position at spacings:										
S = 1.0H	+ 0.4 / - 0.4					+ 0.5 / - 0.5				
1.5H	+ 0.7 / - 0.5					+ 1.2 / - 0.4				
2.0H	+ 0.3 / - 0.3					+ 0.4 / - 0.2				

CIE Pub.117, 1884 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 2.2$)
Area: 0.005865 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-23

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084A 24R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up

UTILIZATION FACTORS TABLE

Test:U:119.95V I:0.1815A P:21.676W PF:0.9946 Freq:59.98Hz Lamp Flux:1884x1 lm		
NAME: 2214.412-2-LEA-09	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2212231381
MFR.: RISE	SUR.:0.005865m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	73	68	65	72	68	65	72	67	65	62
0.80	78	74	71	78	74	71	77	73	71	68
1.00	82	77	75	81	77	74	80	77	74	71
1.25	84	81	78	84	80	78	82	79	77	74
1.50	86	83	80	86	82	80	84	81	79	76
2.00	88	85	83	87	84	82	85	83	81	77
2.50	90	87	84	88	86	84	86	84	82	78
3.00	91	88	86	89	87	85	87	85	83	78
4.00	92	90	89	91	89	87	88	86	85	80
5.00	93	92	90	92	90	89	88	87	86	80
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-23

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084A 24R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up

ISOCANDELA DIAGRAM

Test:U:119.95V I:0.1815A P:21.676W PF:0.9946 Freq:59.98Hz Lamp Flux:1884x1 lm		
NAME: 2214.412-2-LEA-09	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2212231381
MFR.: RISE	SUR.:0.005865m2	Shielding Angle:

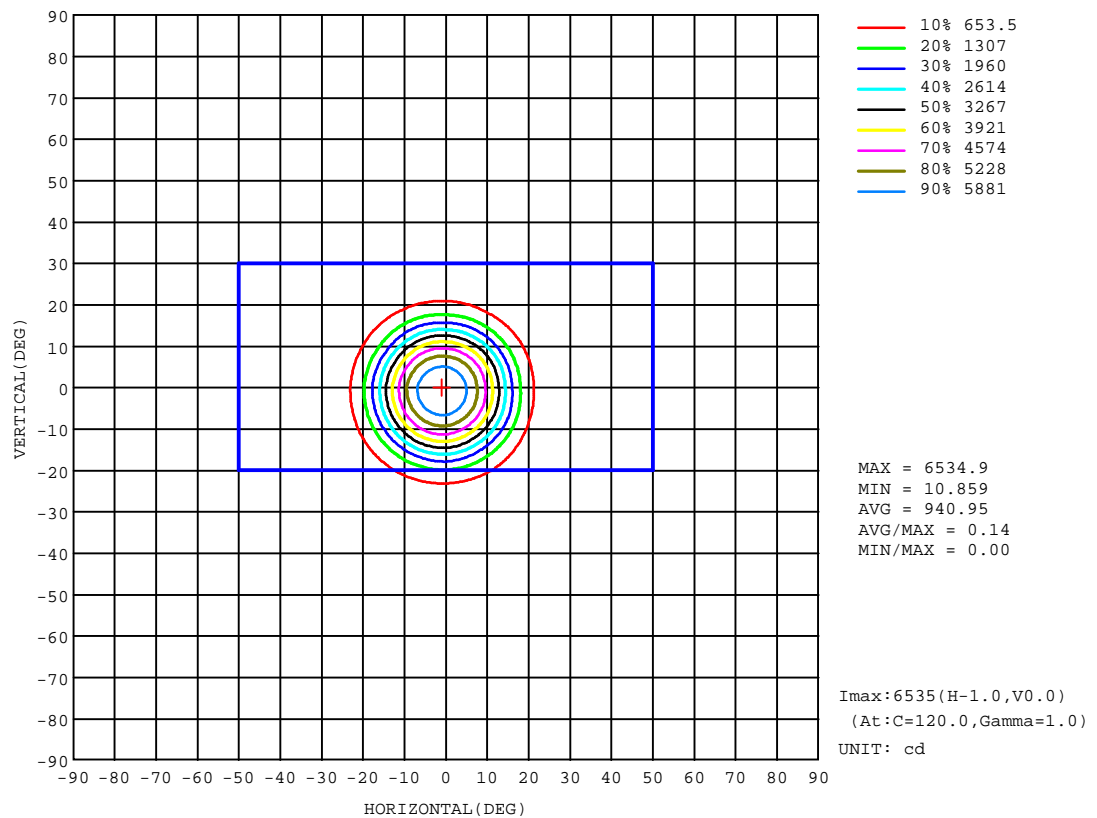


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-23

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084A 24R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up

AAI Figure

Test:U:119.95V I:0.1815A P:21.676W PF:0.9946 Freq:59.98Hz Lamp Flux:1884x1 lm		
NAME: 2214.412-2-LEA-09	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2212231381
MFR.: RISE	SUR.:0.005865m2	Shielding Angle:

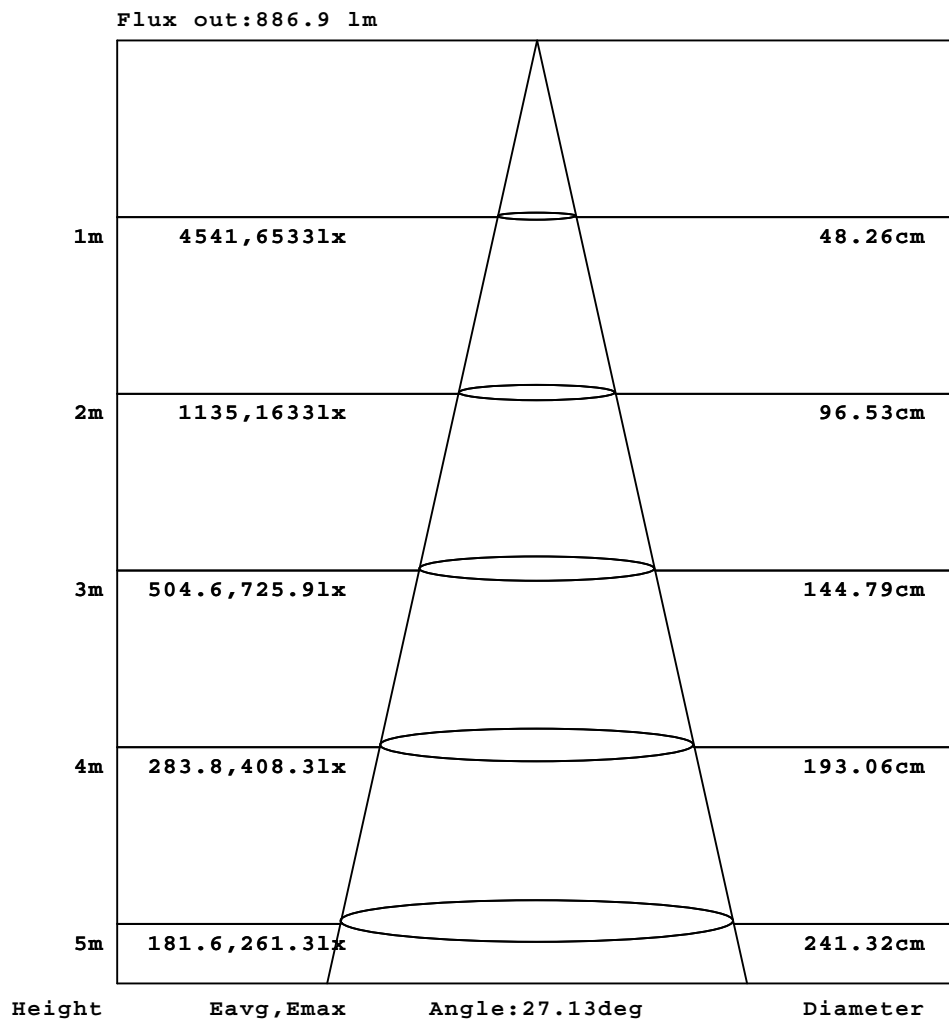


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-23

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084A 24R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up

ISOLUX DIAGRAM

Test:U:119.95V I:0.1815A P:21.676W PF:0.9946 Freq:59.98Hz Lamp Flux:1884x1 lm		
NAME: 2214.412-2-LEA-09	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2212231381
MFR.: RISE	SUR.:0.005865m2	Shielding Angle:

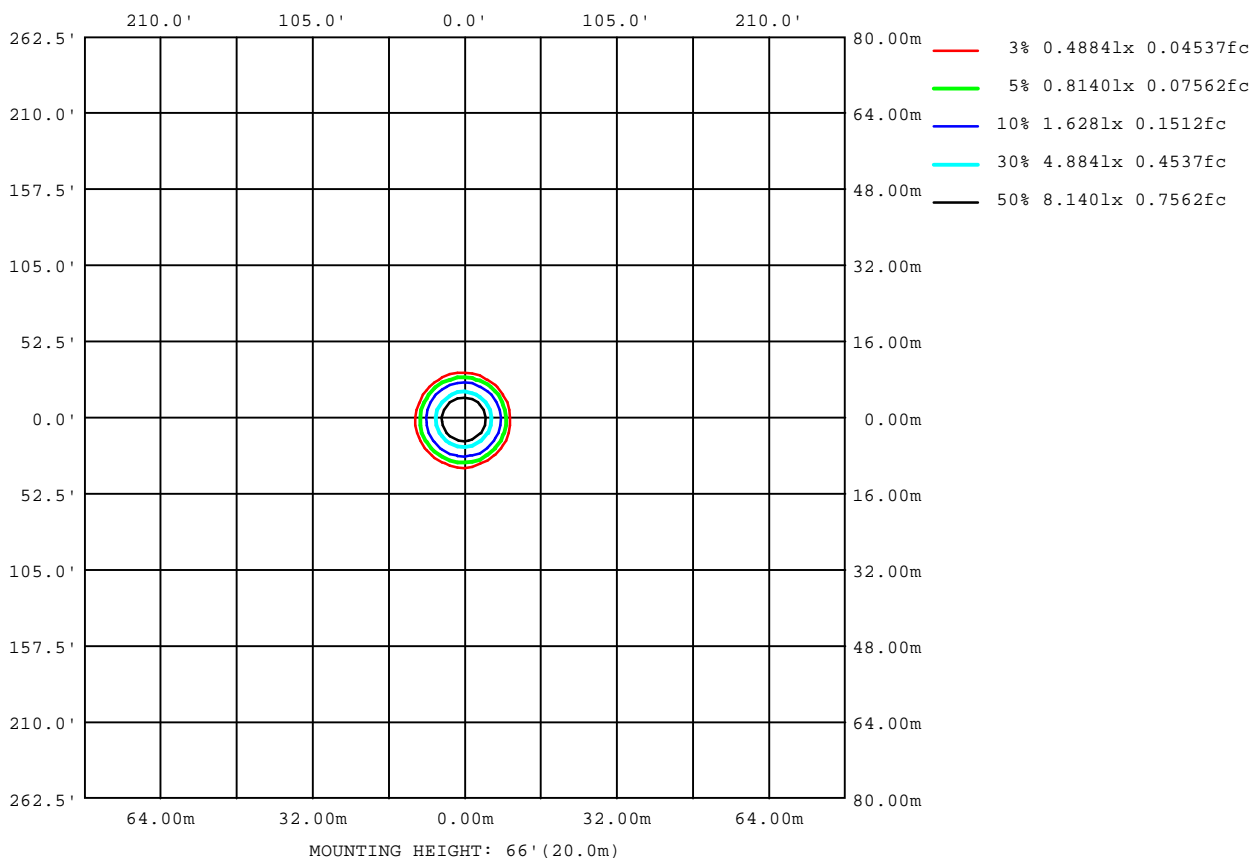

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-23

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084A 24R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up

LED Avg.L Report

Test:U:119.95V I:0.1815A P:21.676W PF:0.9946 Freq:59.98Hz Lamp Flux:1884x1 lm		
NAME: 2214.412-2-LEA-09	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2212231381
MFR.: RISE	SUR.:0.005865m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	3597
L_0~180(75)av	3478
L_0~180(85)av	2083
L_90~270(65)av	3569
L_90~270(75)av	3462
L_90~270(85)av	1685
L_45(65)av	3578
L_45(75)av	3467
L_45(85)av	1970

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-23

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084A 24R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up

Planar Illuminance Curve

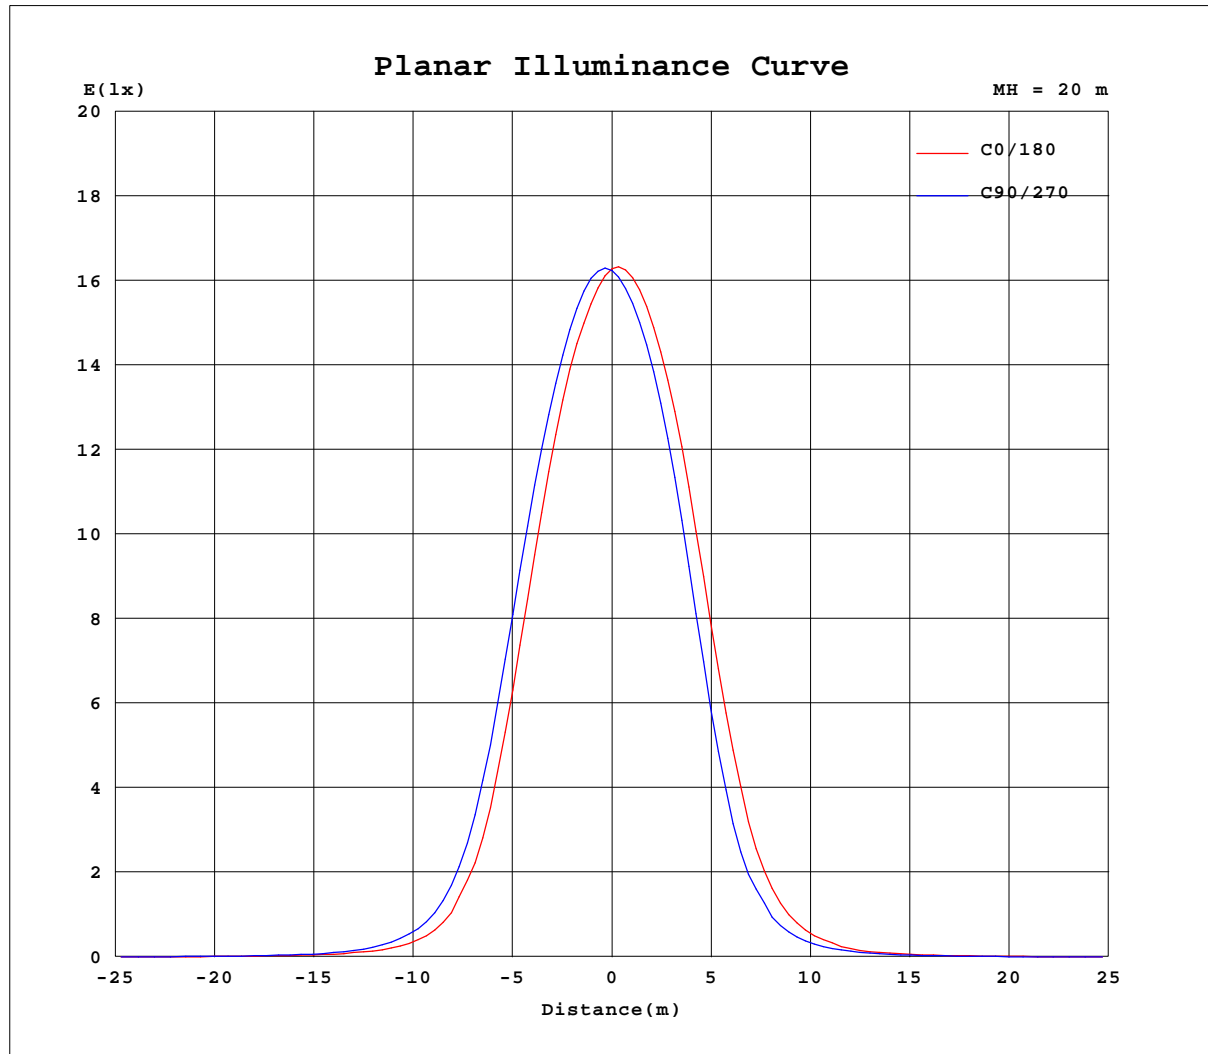

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Zoe
 Test Date: 2022-12-23

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: CMA1306-0000-000F0U0A30G Ra:90
 LENS: PM-1084A 24R
 DRIVER: PUP20A-1WMC 500mA
 30minutes warm-up



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.95V I:0.1815A P:21.676W PF:0.9946 Freq:59.98Hz Lamp Flux:1884x1 lm		
NAME: 2214.412-2-LEA-09	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2212231381
MFR.: RISE	SUR.:0.005865m2	Shielding Angle:

Table--1

UNIT: cd

C(°) g (°)	0	30	60	90	120	150	180	210	240	270	300	330						
0	6501	6501	6501	6501	6501	6501	6501	6501	6501	6501	6501	6501						
5	5862	5968	6086	6215	6274	6265	6214	6069	5960	5865	5813	5811						
10	4399	4619	4832	5045	5123	5111	5046	4765	4546	4334	4267	4330						
15	2360	2624	2851	3127	3205	3154	3024	2656	2386	2165	2177	2247						
20	876	1001	1148	1303	1329	1311	1234	1008	870	779	731	809						
25	276	330	386	454	471	470	432	346	302	258	255	258						
30	111	127	150	178	185	187	157	128	115	103	102	105						
35	53.6	60.2	70.2	78.0	81.9	75.3	66.5	57.4	52.1	47.9	48.3	50.2						
40	31.0	34.0	37.0	40.7	41.4	39.8	36.5	32.1	29.8	27.9	28.4	29.3						
45	18.7	20.4	21.4	23.0	23.4	22.8	21.4	19.0	18.2	16.8	16.9	17.7						
50	13.7	14.3	15.0	15.5	15.3	15.0	14.8	13.9	13.3	12.8	13.0	13.3						
55	11.4	11.7	12.1	12.4	12.3	12.1	11.8	11.5	11.1	10.7	10.8	11.1						
60	10.1	10.4	10.6	10.8	10.8	10.5	10.4	10.1	9.71	9.47	9.55	9.78						
65	8.83	9.13	9.32	9.44	9.40	9.19	9.00	8.66	8.40	8.25	8.33	8.54						
70	7.03	7.44	7.75	8.01	7.97	7.75	7.51	7.07	6.75	6.52	6.55	6.74						
75	4.98	5.36	5.68	5.96	5.95	5.78	5.58	5.16	4.85	4.55	4.60	4.73						
80	2.96	3.33	3.62	3.90	3.90	3.77	3.57	3.21	2.70	2.23	2.41	2.79						
85	0.84	1.30	1.52	1.63	1.74	1.67	1.29	0.82	0.25	0.09	0.15	0.57						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-12-23

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000F0U0A30G Ra:90
LENS: PM-1084A 24R
DRIVER:PUP20A-1WMC 500mA
30minutes warm-up