




EDELWEISS-W30



Product specification

INTERIOR RECESSED WALL LIGHT

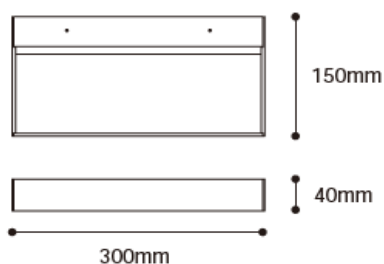

Technical Specification

Article number	2215.106	
LED Consumption	33W	
Fixture Consumption	37.3W	
Current / Voltage	900mA / 36Vdc	
CRI	90+	80+
CCT	3000K	3000K
LED Lumen ^{*1}	-	-
Delivered Lumen	3063lm	3813lm
Beam Angle available	75°	

Driver Technical Specification (Built-in)

Driver Brand	OSRAM	Driver Model	IT FIT 60/220-240/1A2 CS L
Input voltage / Frequency range	220-240Vac / 50/60Hz	Output Current / Voltage	900mA / 23-54Vdc
Dimming / Flicker	Non / Free	Certification	CE / ENEC 05 / EAC / CCC / BIS / RoHS
Power Factor	≥ 0.98	Warranty	5 years

Technical character

Products Standard	IEC 60598-1
	IEC 62031
Insulation	CLASS II
Protection	IP20
Tilt / Rotate	-
Operating temperature	0~35°C
Average Failure Time	


Materials

Luminaire	Extruded aluminum
	Aluminum die cast
Reflector	Aluminum reflector
Glass	glass

Accessories

Photometric

CRI90+



h(m)	D(m)	E(lx)
75°		
1.0	1.10	1202
2.0	2.20	300
3.0	3.30	133
4.0	4.40	75
5.0	5.50	48

Package

inner box 1.66kg

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.

H:300cm

Distance to the ceiling:200cm

Distance between fixtures:200cm

