

Luminaire Photograph



Light Output Ratio:	74.5%	
Luminaire Power:	7.541 W	
SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	1.00	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Zoe
Test Date: 2022-9-17

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: CXB1304-0000-000F0UA430G Ra:90
LENS: PM-1084A 24R
DRIVER: KEDH009S0350NR12A1 350mA
30minutes warm-up

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

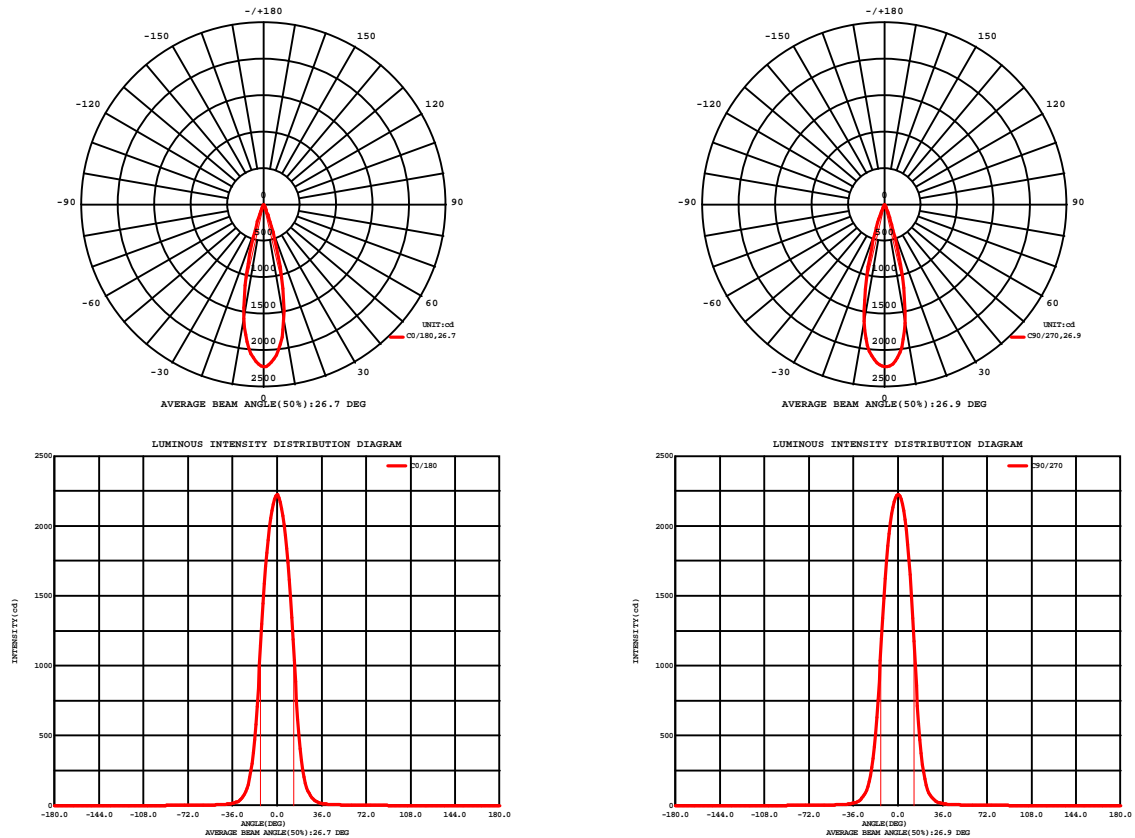


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Zoe
Test Date: 2022-9-17

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: CXB1304-0000-000F0UA430G Ra: 90
LENS: PM-1084A 24R
DRIVER: KEDH009S0350NR12A1 350mA
30minutes warm-up

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.21V I:0.0374A P:7.5406W PF:0.9116 Freq:49.99Hz Lamp Flux:663.403x1 lm		
NAME: 2218.117-ACOT-96	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209170915
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 65.53 lm/W			
MODEL	CREE	I _{max} (cd)	2225	S/MH(C0/180)	0.42
NOMINAL POWER(W)	7	LOR(%)	74.5	S/MH(C90/270)	0.43
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	494.13	h UP,DN(C0-180)	0.0,36.9
NOMINAL FLUX(lm)	663.403	CIE CLASS	DIRECT	h UP,DN(C180-360)	0.0,37.6
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220	h down(%)	74.5	CIBSE SHR MAX	1.00

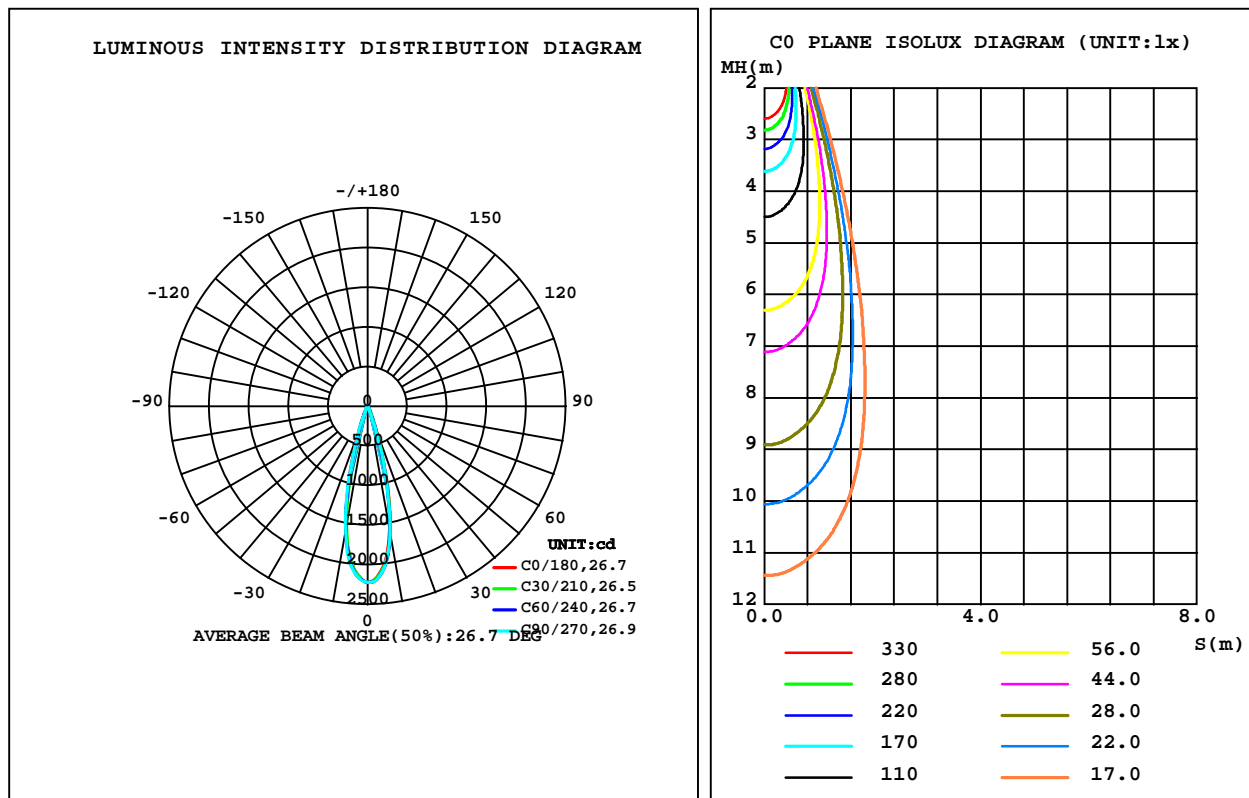

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Zoe
 Test Date:2022-9-17

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
 Humidity:65.0%
 Test Distance:3.160m [K=1.0000]
 Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90
 LENS: PM-1084A 24R
 DRIVER: KEDH009S0350NR12A1 350mA
 30minutes warm-up

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1615	1650	1651	1578	1587	1584	1622	1635	0- 10	183.7	183.7	37.2,27.7
20	322.3	301.8	293.0	272.2	300.7	296.9	338.2	328.7	10- 20	233.1	416.7	84.3,62.8
30	39.67	35.43	35.62	34.48	37.67	37.78	42.07	41.85	20- 30	52.97	469.7	95.1,70.8
40	9.500	9.800	8.603	9.288	9.324	10.11	9.453	10.65	30- 40	12.09	481.8	97.5,72.6
50	4.915	4.936	4.579	4.568	4.494	4.806	4.668	5.016	40- 50	5.006	486.8	98.5,73.4
60	3.720	3.765	3.359	3.428	3.239	3.497	3.506	3.808	50- 60	3.639	490.4	99.3,73.9
70	1.921	2.118	1.757	1.857	1.606	1.763	1.560	2.022	60- 70	2.858	493.3	99.8,74.4
80	0.1435	0.1536	0.1585	0.1575	0.1508	0.1408	0.1344	0.1375	70- 80	0.7557	494.1	100,74.5
90	0	0	0	0	0	0	0	0	80- 90	0.0696	494.1	100,74.5
100	0	0	0	0	0	0	0	0	90-100	0	494.1	100,74.5
110	0	0	0	0	0	0	0	0	100-110	0	494.1	100,74.5
120	0	0	0	0	0	0	0	0	110-120	0	494.1	100,74.5
130	0	0	0	0	0	0	0	0	120-130	0	494.1	100,74.5
140	0	0	0	0	0	0	0	0	130-140	0	494.1	100,74.5
150	0	0	0	0	0	0	0	0	140-150	0	494.1	100,74.5
160	0	0	0	0	0	0	0	0	150-160	0	494.1	100,74.5
170	0	0	0	0	0	0	0	0	160-170	0	494.1	100,74.5
180	0	0	0	0	0	0	0	0	170-180	0	494.1	100,74.5
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-9-17

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90
LENS: PM-1084A 24R
DRIVER: KEDH009S0350NR12A1 350mA
30minutes warm-up

LUMINANCE LIMITATION CURVES

Test:U:220.21V I:0.0374A P:7.5406W PF:0.9116 Freq:49.99Hz Lamp Flux:663.403x1 lm		
NAME: 2218.117-ACOT-96	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209170915
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

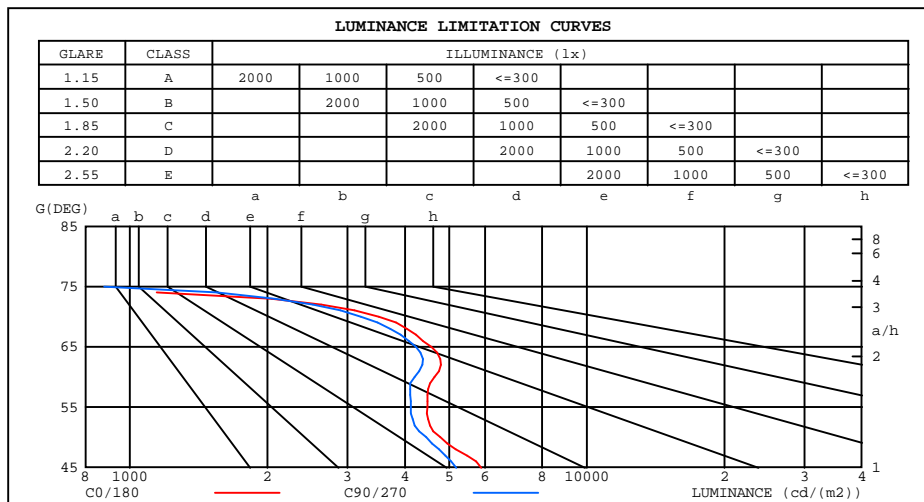

LUMINANCE cd/(m2)		
G(180)	C0/180	C90/270
85	452	504
80	516	570
75	662	879
70	3509	3211
65	4567	4230
60	4650	4198
55	4480	4122
50	4779	4452
45	5875	5189


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-9-17

G Range: 0 - 180DEG
G Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90
LENS: PM-1084A 24R
DRIVER: KEDH009S0350NR12A1 350mA
30minutes warm-up

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.21V I:0.0374A P:7.5406W PF:0.9116 Freq:49.99Hz Lamp Flux:663.403x1 lm		
NAME: 2218.117-ACOT-96	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209170915
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

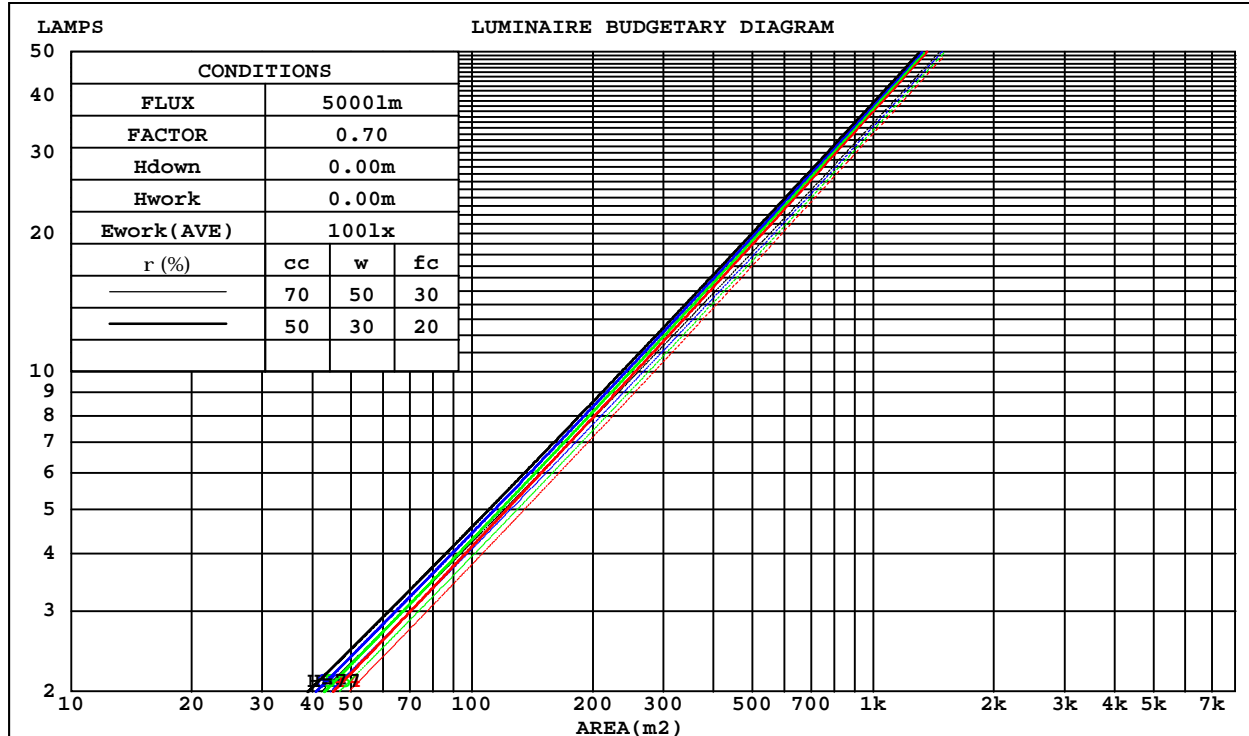

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-9-17

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90
LENS: PM-1084A 24R
DRIVER: KEDH009S0350NR12A1 350mA
30minutes warm-up

WEC AND CCEC

Test:U:220.21V I:0.0374A P:7.5406W PF:0.9116 Freq:49.99Hz Lamp Flux:663.403x1 lm		
NAME: 2218.117-ACOT-96	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209170915
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.101	.058	.018	.097	.055	.017	.087	.050	.016	.079	.045	.015	.071	.041	.013	
2.0	.094	.051	.016	.090	.049	.015	.082	.046	.014	.075	.042	.013	.069	.039	.012	
3.0	.087	.046	.014	.084	.045	.014	.078	.042	.013	.072	.039	.012	.066	.037	.011	
4.0	.081	.042	.012	.079	.041	.012	.073	.039	.012	.068	.037	.011	.064	.035	.011	
5.0	.077	.039	.011	.074	.038	.011	.070	.036	.011	.065	.034	.010	.061	.033	.010	
6.0	.072	.036	.010	.070	.035	.010	.066	.034	.010	.063	.033	.010	.059	.031	.009	
7.0	.068	.034	.010	.067	.033	.009	.063	.032	.009	.060	.031	.009	.057	.030	.009	
8.0	.065	.032	.009	.064	.031	.009	.061	.030	.009	.058	.029	.008	.055	.028	.008	
9.0	.062	.030	.008	.061	.030	.008	.058	.029	.008	.056	.028	.008	.053	.027	.008	
10.0	.059	.028	.008	.058	.028	.008	.056	.027	.008	.054	.027	.008	.052	.026	.007	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.142	.142	.142	.121	.121	.121	.083	.083	.083	.048	.048	.048	.015	.015	.015	
1.0	.125	.117	.110	.107	.101	.095	.073	.069	.066	.042	.040	.038	.014	.013	.012	
2.0	.112	.099	.088	.096	.085	.076	.066	.059	.053	.038	.034	.031	.012	.011	.010	
3.0	.101	.084	.071	.086	.073	.062	.059	.051	.043	.034	.030	.026	.011	.010	.008	
4.0	.091	.073	.059	.078	.063	.051	.054	.044	.036	.031	.026	.021	.010	.008	.007	
5.0	.083	.064	.049	.071	.055	.043	.049	.038	.030	.029	.023	.018	.009	.007	.006	
6.0	.077	.056	.042	.066	.049	.036	.045	.034	.026	.026	.020	.015	.008	.007	.005	
7.0	.071	.050	.036	.061	.043	.031	.042	.030	.022	.024	.018	.013	.008	.006	.004	
8.0	.066	.045	.031	.057	.039	.027	.039	.027	.019	.023	.016	.011	.007	.005	.004	
9.0	.062	.041	.027	.053	.035	.023	.037	.025	.017	.021	.015	.010	.007	.005	.003	
10.0	.058	.037	.023	.050	.032	.020	.035	.023	.015	.020	.013	.009	.007	.004	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-9-17

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90
LENS: PM-1084A 24R
DRIVER: KEDH009S0350NR12A1 350mA
30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:220.21V I:0.0374A P:7.5406W PF:0.9116 Freq:49.99Hz Lamp Flux:663.403x1 lm										
NAME: 2218.117-ACOT-96					TYPE:			WEIGHT:		
SPEC.:3000K					DIM.:			SERIAL No.:2209170915		
MFR.: RISE					SUR.:0.0016m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.1	9.7	9.3	9.9	10.0	8.8	9.4	9.0	9.5	9.7
3H	10.2	10.8	10.4	11.0	11.2	9.8	10.4	10.0	10.6	10.8
4H	10.2	10.8	10.5	11.0	11.2	9.9	10.4	10.1	10.6	10.9
6H	10.2	10.7	10.4	10.9	11.2	9.8	10.3	10.1	10.6	10.8
8H	10.1	10.6	10.4	10.9	11.1	9.8	10.3	10.1	10.5	10.8
12H	10.1	10.6	10.4	10.8	11.1	9.7	10.2	10.0	10.5	10.7
4H 2H	9.6	10.2	9.9	10.4	10.6	9.4	9.9	9.6	10.1	10.3
3H	10.8	11.3	11.1	11.6	11.9	10.5	11.0	10.8	11.3	11.5
4H	10.9	11.4	11.2	11.6	11.9	10.6	11.0	10.9	11.3	11.6
6H	10.8	11.2	11.2	11.5	11.9	10.5	10.9	10.9	11.2	11.6
8H	10.8	11.1	11.1	11.5	11.9	10.4	10.8	10.8	11.2	11.5
12H	10.7	11.1	11.1	11.4	11.8	10.4	10.7	10.8	11.1	11.5
8H 4H	10.9	11.2	11.2	11.6	11.9	10.6	10.9	10.9	11.3	11.6
6H	10.8	11.1	11.2	11.5	11.9	10.5	10.8	10.9	11.2	11.6
8H	10.7	11.0	11.2	11.4	11.9	10.4	10.7	10.9	11.1	11.6
12H	10.7	10.9	11.1	11.3	11.8	10.4	10.6	10.8	11.1	11.5
12H 4H	10.8	11.2	11.2	11.5	11.9	10.5	10.9	10.9	11.2	11.6
6H	10.7	11.0	11.2	11.4	11.8	10.4	10.7	10.9	11.1	11.5
8H	10.7	10.9	11.1	11.3	11.8	10.4	10.6	10.8	11.0	11.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.6 / - 0.8					+ 0.6 / - 0.8				
1.5H	+ 1.1 / - 0.7					+ 1.0 / - 0.8				
2.0H	+ 0.4 / - 0.6					+ 0.4 / - 0.7				

CIE Pub.117, 663.4 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.4)
Area: 0.0016 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-9-17

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90
LENS: PM-1084A 24R
DRIVER: KEDH009S0350NR12A1 350mA
30minutes warm-up

UTILIZATION FACTORS TABLE

Test:U:220.21V I:0.0374A P:7.5406W PF:0.9116 Freq:49.99Hz Lamp Flux:663.403x1 lm		
NAME: 2218.117-ACOT-96	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209170915
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	67	63	60	67	63	60	66	62	60	57
0.80	72	68	66	72	68	66	71	68	65	63
1.00	75	71	69	75	71	69	73	71	68	66
1.25	78	74	72	77	74	72	76	73	71	68
1.50	80	77	74	79	76	74	77	75	73	70
2.00	81	79	76	80	78	76	78	76	75	71
2.50	83	80	78	81	79	77	79	77	76	72
3.00	84	81	79	82	80	79	80	78	77	72
4.00	85	83	82	84	82	81	81	80	79	73
5.00	86	85	83	84	83	82	82	81	80	74
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-9-17

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90
LENS: PM-1084A 24R
DRIVER: KEDH009S0350NR12A1 350mA
30minutes warm-up

ISOCANDELA DIAGRAM

Test:U:220.21V I:0.0374A P:7.5406W PF:0.9116 Freq:49.99Hz Lamp Flux:663.403x1 lm		
NAME: 2218.117-ACOT-96	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209170915
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

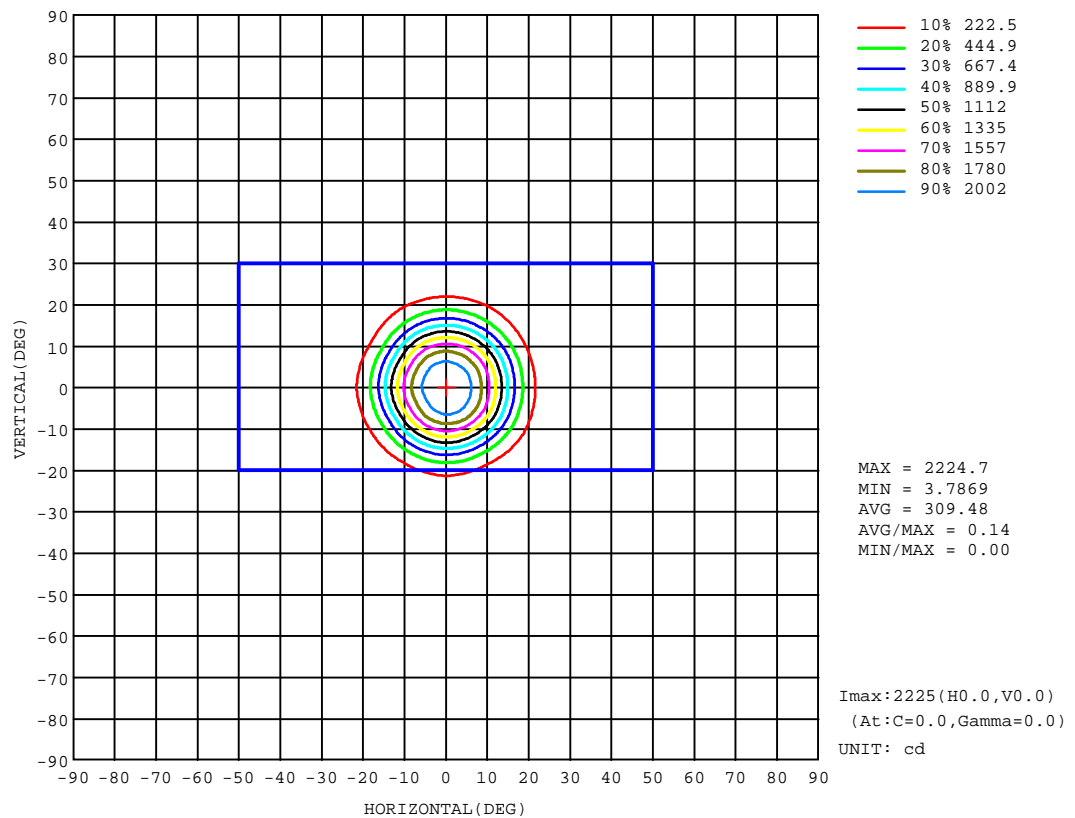


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-9-17

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90
LENS: PM-1084A 24R
DRIVER: KEDH009S0350NR12A1 350mA
30minutes warm-up

AAI Figure

Test:U:220.21V I:0.0374A P:7.5406W PF:0.9116 Freq:49.99Hz Lamp Flux:663.403x1 lm		
NAME: 2218.117-ACOT-96	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209170915
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

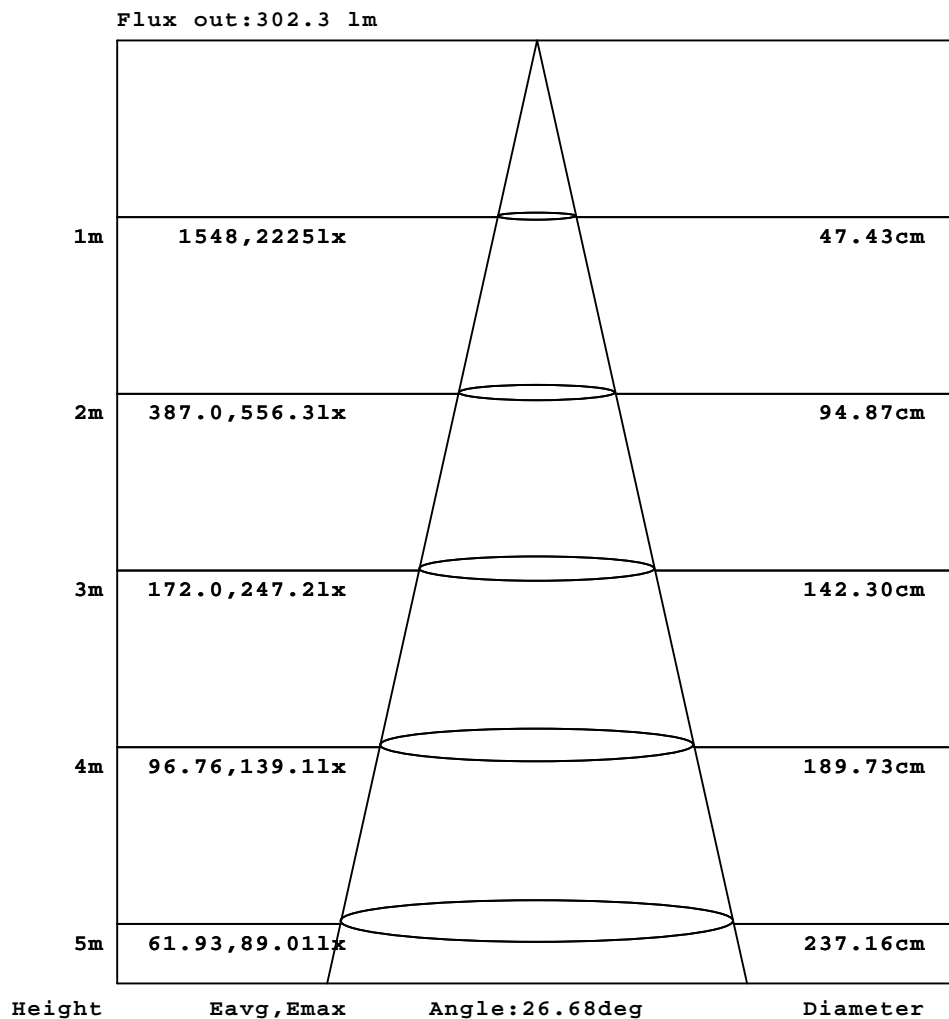


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Zoe
Test Date: 2022-9-17

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: CXB1304-0000-000F0UA430G Ra:90
LENS: PM-1084A 24R
DRIVER: KEDH009S0350NR12A1 350mA
30minutes warm-up

ISOLUX DIAGRAM

Test:U:220.21V I:0.0374A P:7.5406W PF:0.9116 Freq:49.99Hz Lamp Flux:663.403x1 lm		
NAME: 2218.117-ACOT-96	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209170915
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

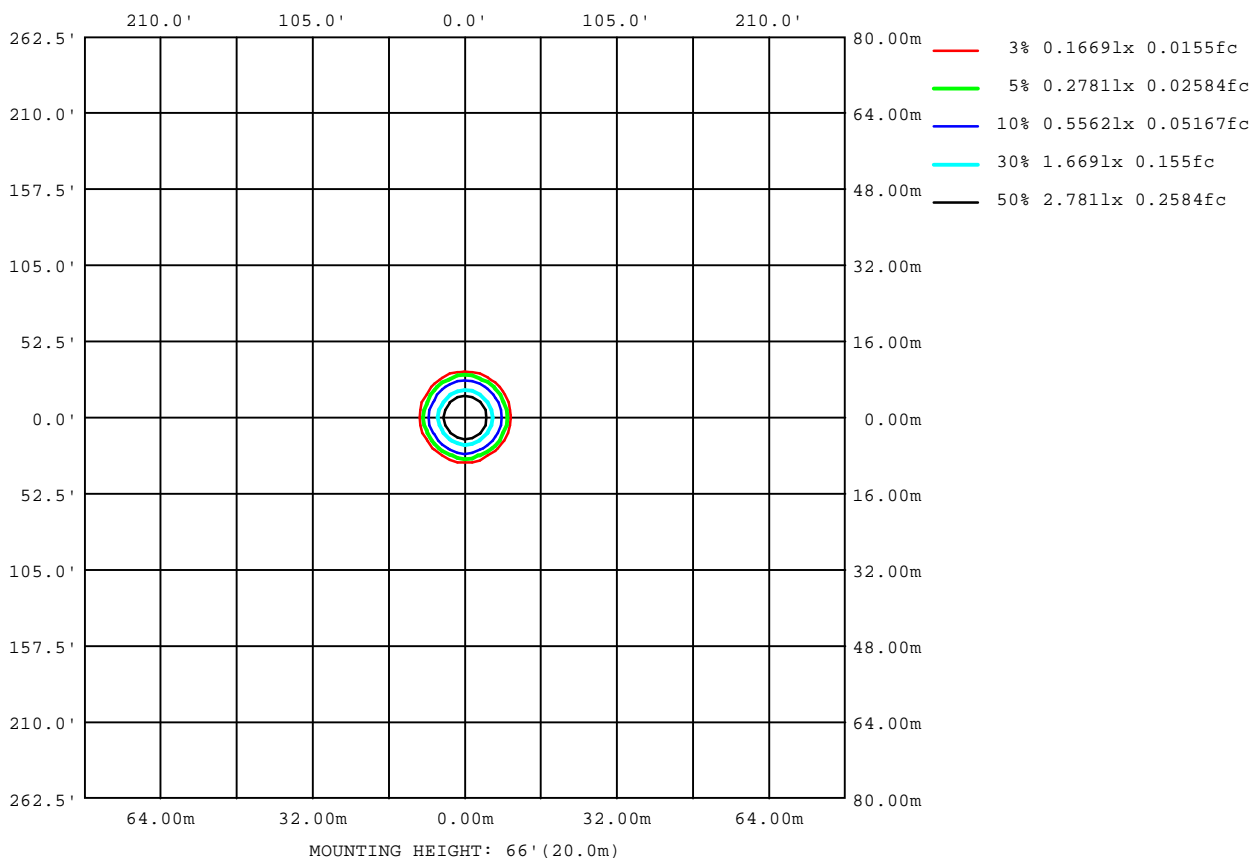

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-9-17

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90
LENS: PM-1084A 24R
DRIVER: KEDH009S0350NR12A1 350mA
30minutes warm-up

LED Avg.L Report

Test:U:220.21V I:0.0374A P:7.5406W PF:0.9116 Freq:49.99Hz Lamp Flux:663.403x1 lm		
NAME: 2218.117-ACOT-96	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209170915
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	4230
L_0~180(75)av	677
L_0~180(85)av	461
L_90~270(65)av	4161
L_90~270(75)av	744
L_90~270(85)av	444
L_45(65)av	4583
L_45(75)av	1650
L_45(85)av	403

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-9-17

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90
LENS: PM-1084A 24R
DRIVER: KEDH009S0350NR12A1 350mA
30minutes warm-up

Planar Illuminance Curve

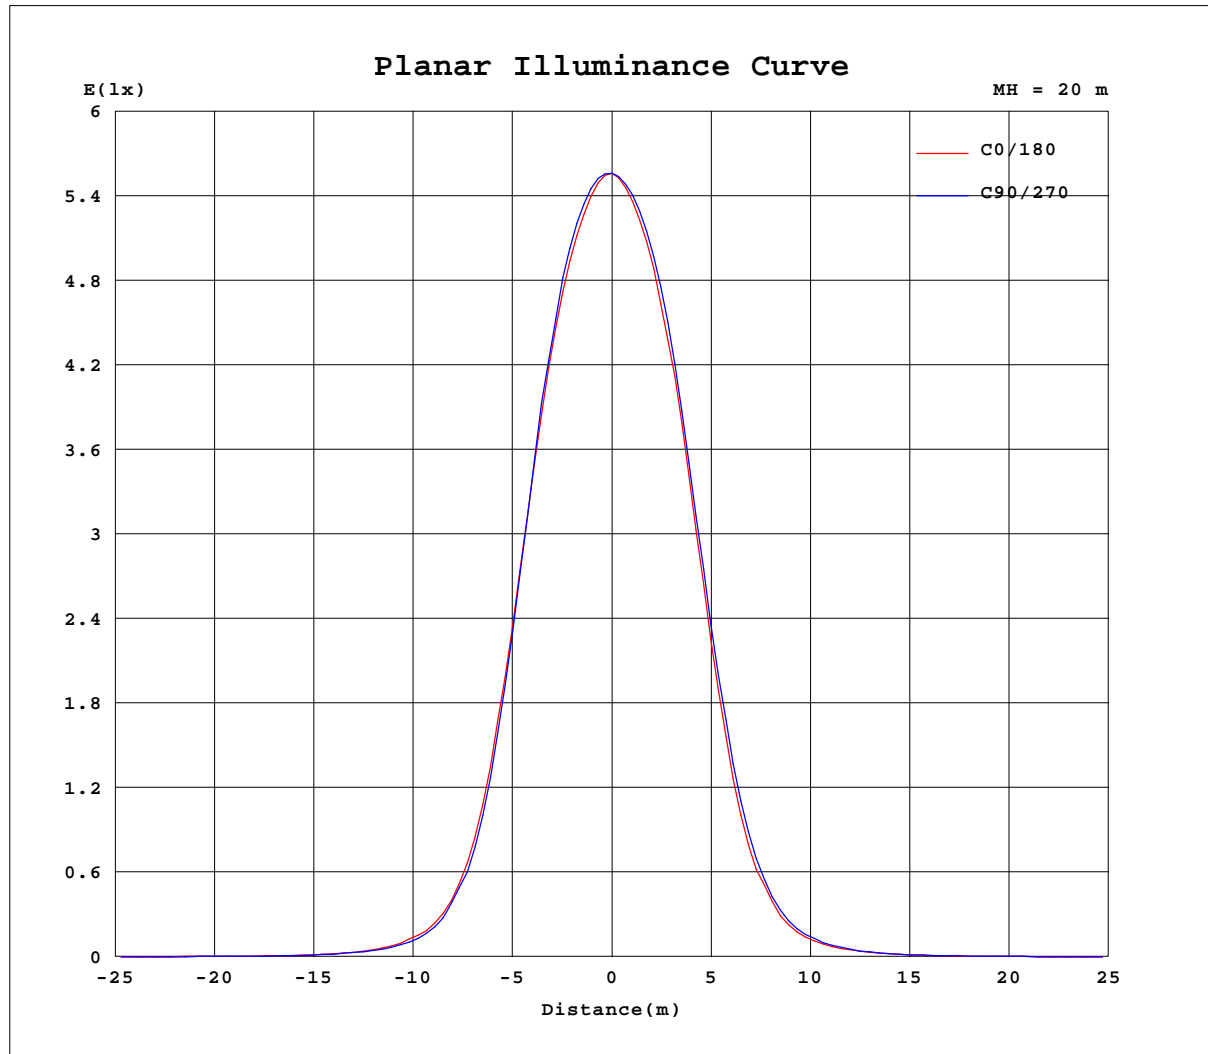

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Zoe
 Test Date: 2022-9-17

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: CXB1304-0000-000F0UA430G Ra:90
 LENS: PM-1084A 24R
 DRIVER: KEDH009S0350NR12A1 350mA
 30minutes warm-up

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.21V I:0.0374A P:7.5406W PF:0.9116 Freq:49.99Hz Lamp Flux:663.403x1 lm		
NAME: 2218.117-ACOT-96	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209170915
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

Table--1

UNIT: cd

C(°)	0	30	60	90	120	150	180	210	240	270	300	330						
g (°)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2225	2225	2225	2225	2225	2225	2225	2225	2225	2225	2225	2225						
5	2072	2086	2105	2106	2073	2038	2053	2048	2076	2083	2079	2083						
10	1615	1654	1646	1651	1599	1557	1587	1556	1612	1622	1634	1637						
15	884	897	868	858	823	780	842	812	868	889	893	902						
20	322	317	286	293	270	275	301	278	316	338	331	327						
25	102	96.3	88.0	90.4	88.2	84.7	96.3	89.7	102	110	107	105						
30	39.7	36.4	34.5	35.6	34.2	34.7	37.7	36.1	39.5	42.1	42.1	41.5						
35	17.9	17.8	16.7	16.3	16.4	16.5	17.8	17.8	19.2	18.6	20.1	19.7						
40	9.50	9.85	9.75	8.60	9.35	9.22	9.32	10.0	10.2	9.45	10.5	10.8						
45	6.65	6.20	6.12	5.87	5.79	5.76	6.44	6.17	6.18	6.17	6.32	6.48						
50	4.92	4.98	4.89	4.58	4.61	4.53	4.49	4.78	4.84	4.67	4.95	5.08						
55	4.11	4.30	4.20	3.78	3.89	3.84	3.66	4.01	4.10	3.88	4.21	4.37						
60	3.72	3.83	3.70	3.36	3.47	3.39	3.24	3.43	3.56	3.51	3.73	3.88						
65	3.09	3.30	3.17	2.86	2.98	2.85	2.63	2.83	2.96	2.77	3.14	3.31						
70	1.92	2.19	2.05	1.76	1.92	1.80	1.61	1.75	1.78	1.56	1.92	2.12						
75	0.27	0.78	0.74	0.36	0.66	0.62	0.29	0.55	0.51	0.25	0.54	0.72						
80	0.14	0.15	0.16	0.16	0.16	0.15	0.15	0.14	0.14	0.13	0.13	0.14						
85	0.06	0.06	0.06	0.07	0.06	0.06	0.07	0.05	0.05	0.05	0.05	0.06						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-9-17

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90
LENS: PM-1084A 24R
DRIVER: KEDH009S0350NR12A1 350mA
30minutes warm-up