


Luminaire Photograph

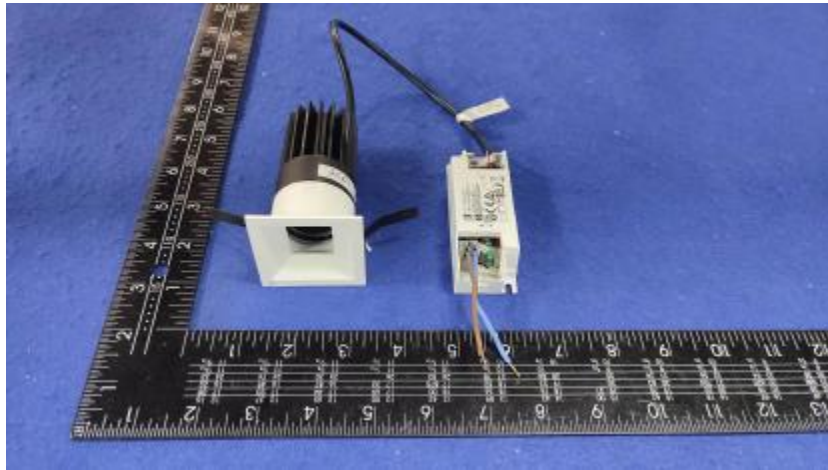

Light Output Ratio:	74.9%	
Luminaire Power:	11.89 W	
SHR Nominal:	0.75	Calculated using the TM5
SHR Maximum:	0.80	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Zoe
Test Date: 2022-9-22

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra: 90
LENS: PM-1084C 50R
DRIVER: KEDH010S0250NR12A1 250mA
30minutes warm-up

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

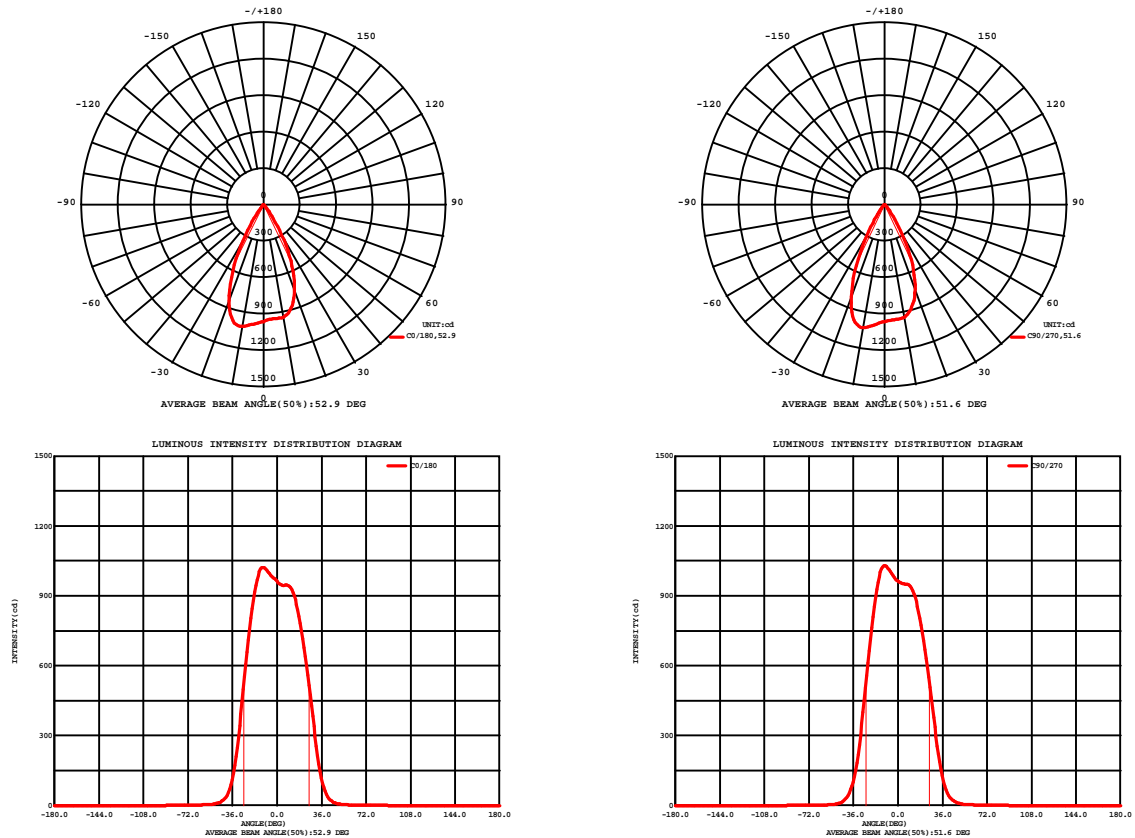


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Zoe
Test Date: 2022-9-22

Test Range: 0 - 180DEG
Test Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra: 90
LENS: PM-1084C 50R
DRIVER: KEDH010S0250NR12A1 250mA
30minutes warm-up

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.18V I:0.0582A P:11.894W PF:0.9249 Freq:49.99Hz Lamp Flux:967.126x1 lm		
NAME: 2218.117-ACOT-97	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209220942
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 60.90 lm/W			
MODEL	CREE	I _{max} (cd)	1043	S/MH(C0/180)	0.80
NOMINAL POWER(W)	12	LOR(%)	74.9	S/MH(C90/270)	0.78
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	724.33	h UP,DN(C0-180)	0.0,36.9
NOMINAL FLUX(lm)	967.126	CIE CLASS	DIRECT	h UP,DN(C180-360)	0.0,38.0
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	220	h down(%)	74.9	CIBSE SHR MAX	0.80

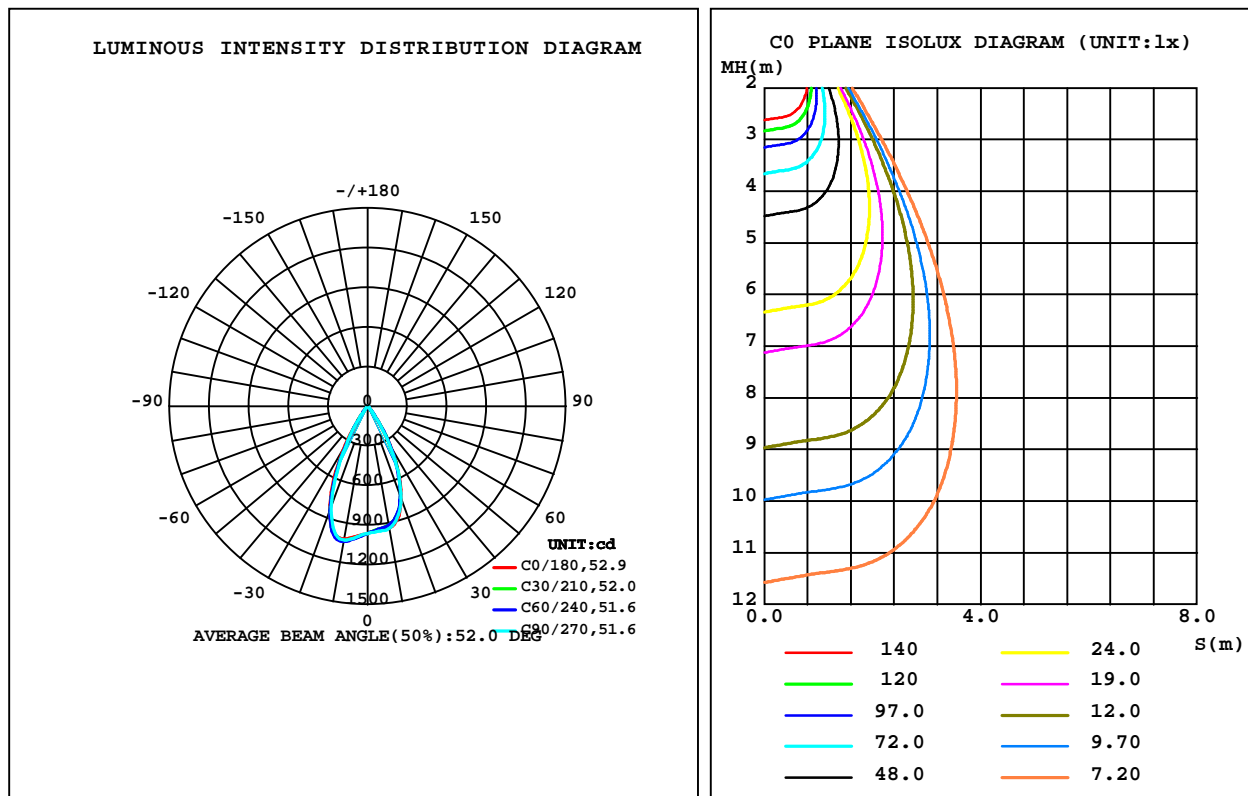

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-9-22

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS: PM-1084C 50R
DRIVER: KEDH010S0250NR12A1 250mA
30minutes warm-up

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	941.3	916.5	941.1	985.7	1021	1037	1030	991.2	0- 10	93.07	93.07	12.8,9.62
20	749.6	730.3	741.1	797.7	844.0	840.9	809.0	795.7	10- 20	257.4	350.5	48.4,36.2
30	339.6	344.6	335.4	343.1	340.8	317.1	302.3	326.8	20- 30	255.1	605.6	83.6,62.6
40	47.10	52.52	53.65	49.71	43.93	42.24	42.82	46.18	30- 40	96.60	702.2	96.9,72.6
50	6.708	8.433	8.655	8.976	7.265	7.515	6.330	7.587	40- 50	15.49	717.6	99.1,74.2
60	2.526	3.051	2.817	3.087	2.779	2.854	2.485	2.621	50- 60	3.997	721.6	99.6,74.6
70	1.105	1.435	1.309	1.495	1.214	1.270	0.9506	1.187	60- 70	2.101	723.7	99.9,74.8
80	0.1182	0.1273	0.1224	0.1168	0.1073	0.1022	0.1008	0.1099	70- 80	0.5277	724.3	100,74.9
90	0	0	0	0	0	0	0	0	80- 90	0.0546	724.3	100,74.9
100	0	0	0	0	0	0	0	0	90-100	0	724.3	100,74.9
110	0	0	0	0	0	0	0	0	100-110	0	724.3	100,74.9
120	0	0	0	0	0	0	0	0	110-120	0	724.3	100,74.9
130	0	0	0	0	0	0	0	0	120-130	0	724.3	100,74.9
140	0	0	0	0	0	0	0	0	130-140	0	724.3	100,74.9
150	0	0	0	0	0	0	0	0	140-150	0	724.3	100,74.9
160	0	0	0	0	0	0	0	0	150-160	0	724.3	100,74.9
170	0	0	0	0	0	0	0	0	160-170	0	724.3	100,74.9
180	0	0	0	0	0	0	0	0	170-180	0	724.3	100,74.9
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-9-22

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS: PM-1084C 50R
DRIVER: KEDH010S0250NR12A1 250mA
30minutes warm-up

LUMINANCE LIMITATION CURVES

Test:U:220.18V I:0.0582A P:11.894W PF:0.9249 Freq:49.99Hz Lamp Flux:967.126x1 lm		
NAME: 2218.117-ACOT-97	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209220942
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

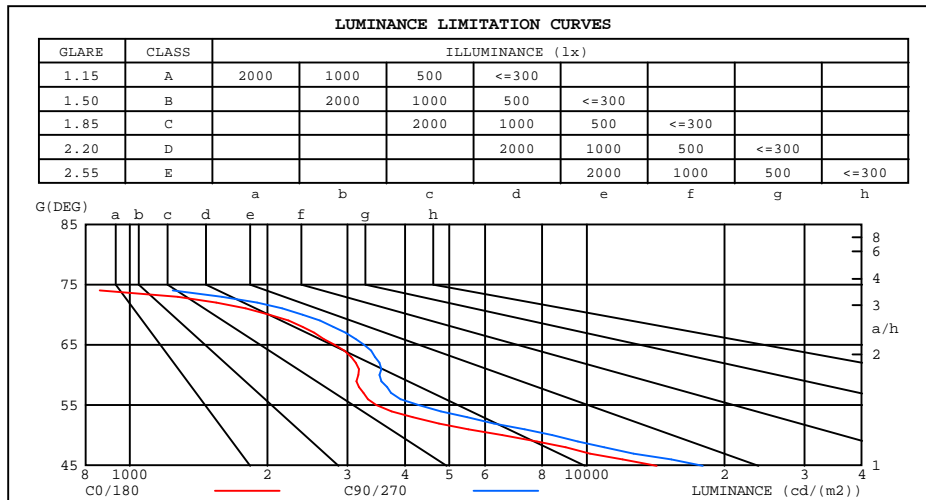

LUMINANCE cd/(m2)		
G(180)	C0/180	C90/270
85	378	395
80	426	440
75	547	698
70	2023	2391
65	2806	3262
60	3164	3520
55	3464	4285
50	6534	8413
45	14250	17964


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-9-22

G Range: 0 - 180DEG
G Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS: PM-1084C 50R
DRIVER: KEDH010S0250NR12A1 250mA
30minutes warm-up

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.18V I:0.0582A P:11.894W PF:0.9249 Freq:49.99Hz Lamp Flux:967.126x1 lm		
NAME: 2218.117-ACOT-97	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209220942
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

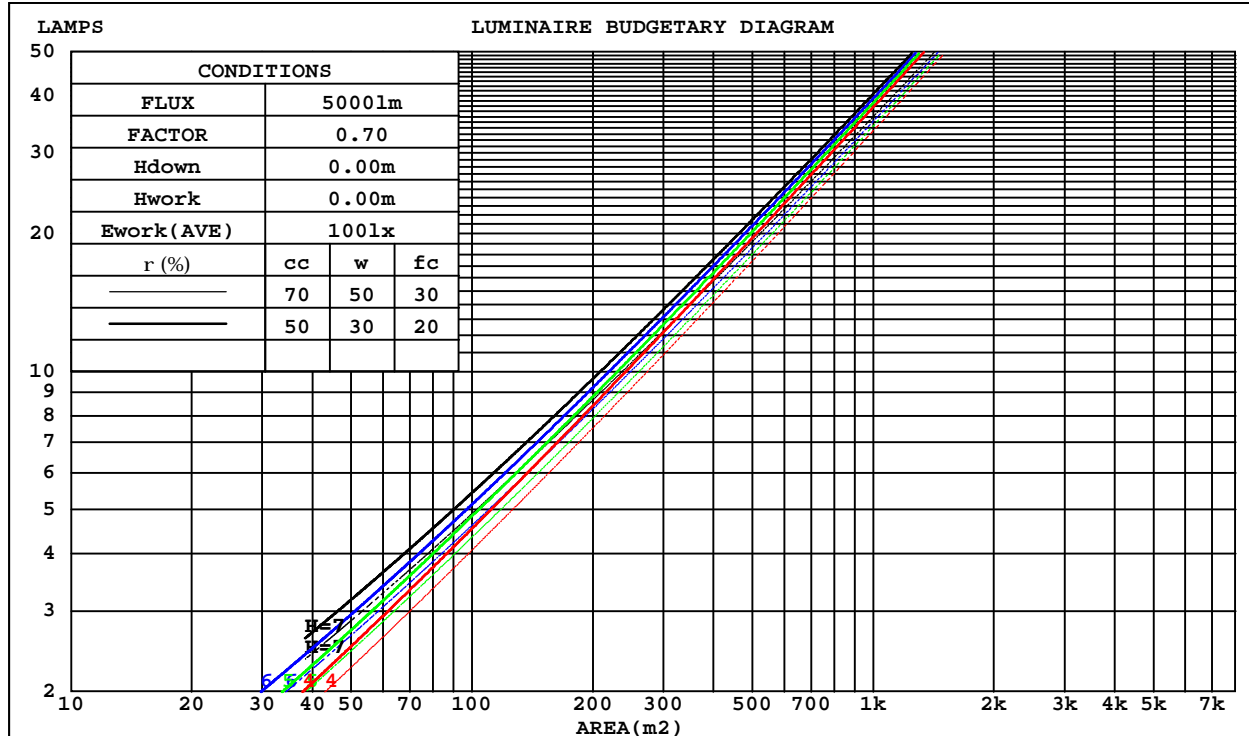

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-9-22

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS: PM-1084C 50R
DRIVER: KEDH010S0250NR12A1 250mA
30minutes warm-up

WEC AND CCEC

Test:U:220.18V I:0.0582A P:11.894W PF:0.9249 Freq:49.99Hz Lamp Flux:967.126x1 lm		
NAME: 2218.117-ACOT-97	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209220942
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.124	.071	.022	.119	.068	.022	.110	.063	.020	.101	.058	.019	.093	.054	.017	
2.0	.118	.065	.020	.114	.063	.019	.106	.059	.018	.099	.055	.017	.092	.052	.016	
3.0	.112	.060	.018	.108	.058	.017	.102	.055	.017	.096	.052	.016	.090	.050	.015	
4.0	.106	.055	.016	.103	.054	.016	.098	.052	.015	.092	.050	.015	.087	.047	.014	
5.0	.101	.052	.015	.099	.051	.015	.094	.049	.014	.089	.047	.014	.085	.045	.014	
6.0	.097	.049	.014	.095	.048	.014	.090	.046	.013	.086	.045	.013	.082	.043	.013	
7.0	.093	.046	.013	.091	.045	.013	.087	.044	.013	.083	.043	.012	.080	.041	.012	
8.0	.089	.043	.012	.087	.043	.012	.084	.042	.012	.080	.041	.012	.077	.040	.012	
9.0	.085	.041	.012	.084	.041	.011	.081	.040	.011	.078	.039	.011	.075	.038	.011	
10.0	.082	.039	.011	.081	.039	.011	.078	.038	.011	.075	.037	.011	.073	.037	.011	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.143	.143	.143	.122	.122	.122	.083	.083	.083	.048	.048	.048	.015	.015	.015	
1.0	.128	.118	.109	.109	.101	.094	.075	.070	.065	.043	.040	.038	.014	.013	.012	
2.0	.116	.099	.086	.099	.085	.074	.068	.059	.052	.039	.034	.030	.013	.011	.010	
3.0	.106	.085	.068	.091	.073	.059	.062	.051	.042	.036	.030	.025	.012	.010	.008	
4.0	.098	.074	.056	.084	.064	.048	.058	.044	.034	.033	.026	.020	.011	.008	.007	
5.0	.091	.065	.046	.078	.056	.040	.054	.039	.028	.031	.023	.017	.010	.008	.006	
6.0	.085	.058	.038	.073	.050	.033	.050	.035	.024	.029	.021	.014	.009	.007	.005	
7.0	.080	.052	.033	.069	.045	.028	.048	.032	.020	.028	.019	.012	.009	.006	.004	
8.0	.076	.047	.028	.065	.041	.024	.045	.029	.017	.026	.017	.010	.009	.006	.003	
9.0	.072	.043	.024	.062	.038	.021	.043	.027	.015	.025	.016	.009	.008	.005	.003	
10.0	.069	.040	.021	.059	.035	.018	.041	.025	.013	.024	.015	.008	.008	.005	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-9-22

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS: PM-1084C 50R
DRIVER: KEDH010S0250NR12A1 250mA
30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:220.18V I:0.0582A P:11.894W PF:0.9249 Freq:49.99Hz Lamp Flux:967.126x1 lm												
NAME: 2218.117-ACOT-97					TYPE:			WEIGHT:				
SPEC.:3000K					DIM.:			SERIAL No.:2209220942				
MFR.: RISE					SUR.:0.0016m2			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3		
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3		
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2		
Room dimensions		Viewed crosswise					Viewed endwise					
x = 2H y = 2H	2H	18.6	19.5	18.9	19.7	19.8	18.7	19.6	18.9	19.7	19.9	
	3H	18.5	19.3	18.8	19.5	19.7	18.6	19.4	18.8	19.6	19.8	
	4H	18.4	19.2	18.7	19.4	19.6	18.5	19.2	18.8	19.5	19.7	
	6H	18.3	19.0	18.6	19.3	19.5	18.4	19.1	18.7	19.3	19.6	
	8H	18.3	19.0	18.6	19.2	19.5	18.4	19.0	18.7	19.3	19.5	
	12H	18.2	18.9	18.6	19.2	19.4	18.3	19.0	18.6	19.2	19.5	
	4H	2H	18.4	19.2	18.7	19.4	19.6	18.5	19.2	18.7	19.4	19.7
	3H	18.3	18.9	18.6	19.2	19.5	18.3	19.0	18.7	19.3	19.5	
	4H	18.2	18.8	18.5	19.1	19.4	18.3	18.8	18.6	19.1	19.4	
	6H	18.1	18.6	18.5	18.9	19.3	18.2	18.7	18.5	19.0	19.4	
	8H	18.0	18.5	18.4	18.9	19.2	18.1	18.6	18.5	18.9	19.3	
12H	18.0	18.4	18.4	18.8	19.2	18.1	18.5	18.5	18.9	19.3		
8H	4H	18.0	18.5	18.4	18.9	19.2	18.1	18.6	18.5	18.9	19.3	
6H	17.9	18.3	18.4	18.7	19.1	18.0	18.4	18.4	18.8	19.2		
8H	17.9	18.2	18.3	18.6	19.1	17.9	18.3	18.4	18.7	19.2		
12H	17.8	18.1	18.3	18.6	19.0	17.9	18.2	18.4	18.6	19.1		
12H	4H	18.0	18.4	18.4	18.8	19.2	18.1	18.5	18.5	18.9	19.3	
6H	17.9	18.2	18.3	18.6	19.1	17.9	18.3	18.4	18.7	19.2		
8H	17.8	18.1	18.3	18.6	19.0	17.9	18.2	18.4	18.6	19.1		
Variations with the observer position at spacings:												
S = 1.0H		+ 3.7 / - 9.8					+ 3.9 / - 9.7					
1.5H		+ 6.2 / - 8.2					+ 6.2 / - 7.7					
2.0H		+ 4.8 / - 3.2					+ 5.5 / - 3.5					

CIE Pub.117, 967.1 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.1)
Area: 0.0016 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-9-22

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS: PM-1084C 50R
DRIVER: KEDH010S0250NR12A1 250mA
30minutes warm-up

UTILIZATION FACTORS TABLE

Test:U:220.18V I:0.0582A P:11.894W PF:0.9249 Freq:49.99Hz Lamp Flux:967.126x1 lm		
NAME: 2218.117-ACOT-97	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209220942
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	67	63	60	67	63	60	66	62	60	57
0.80	72	68	66	72	68	66	71	68	65	63
1.00	76	72	69	75	71	69	74	71	68	66
1.25	78	75	72	78	74	72	76	73	71	68
1.50	80	77	75	79	76	74	78	75	73	70
2.00	82	79	77	81	78	76	79	77	75	71
2.50	83	80	78	82	79	78	80	78	76	72
3.00	84	82	80	83	81	79	80	79	77	73
4.00	86	84	82	84	82	81	81	80	79	74
5.00	86	85	84	85	84	82	82	81	80	75
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Zoe
 Test Date:2022-9-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
 Humidity:65.0%
 Test Distance:3.160m [K=1.0000]
 Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
 LENS: PM-1084C 50R
 DRIVER: KEDH010S0250NR12A1 250mA
 30minutes warm-up

ISOCANDELA DIAGRAM

Test:U:220.18V I:0.0582A P:11.894W PF:0.9249 Freq:49.99Hz Lamp Flux:967.126x1 lm		
NAME: 2218.117-ACOT-97	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209220942
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

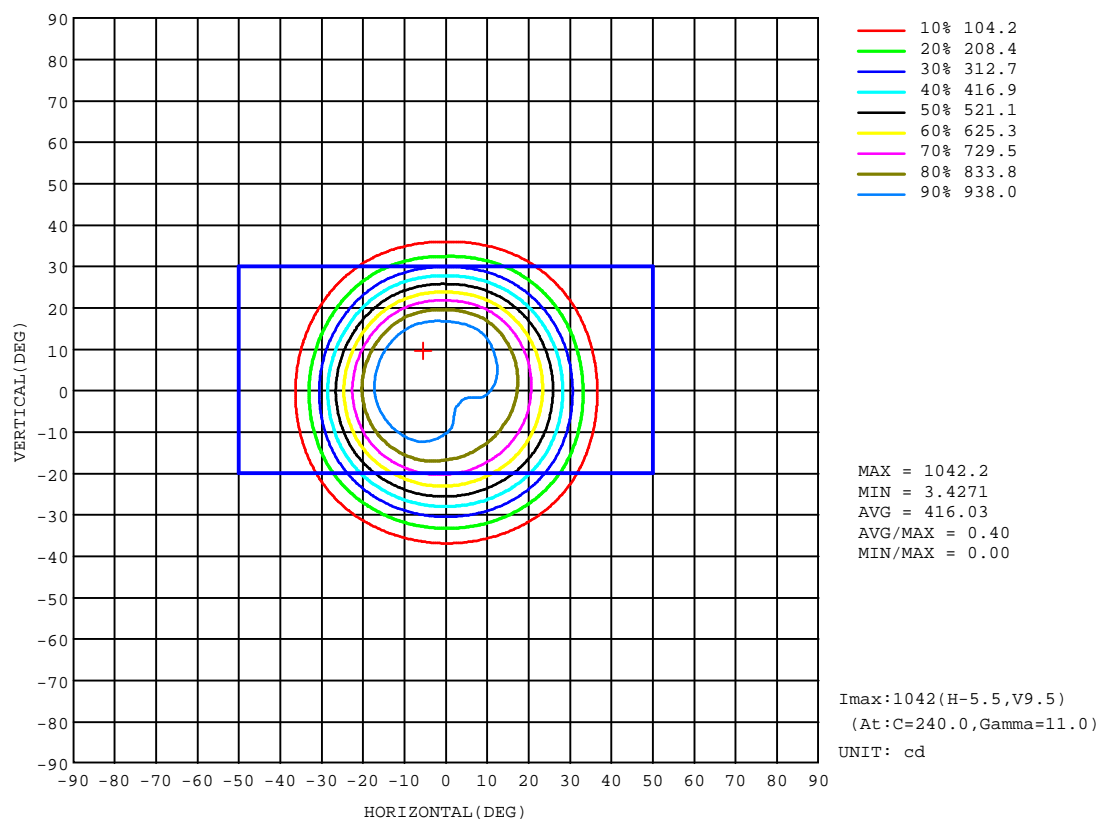


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-9-22

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS: PM-1084C 50R
DRIVER: KEDH010S0250NR12A1 250mA
30minutes warm-up

AAI Figure

Test:U:220.18V I:0.0582A P:11.894W PF:0.9249 Freq:49.99Hz Lamp Flux:967.126x1 lm		
NAME: 2218.117-ACOT-97	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209220942
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

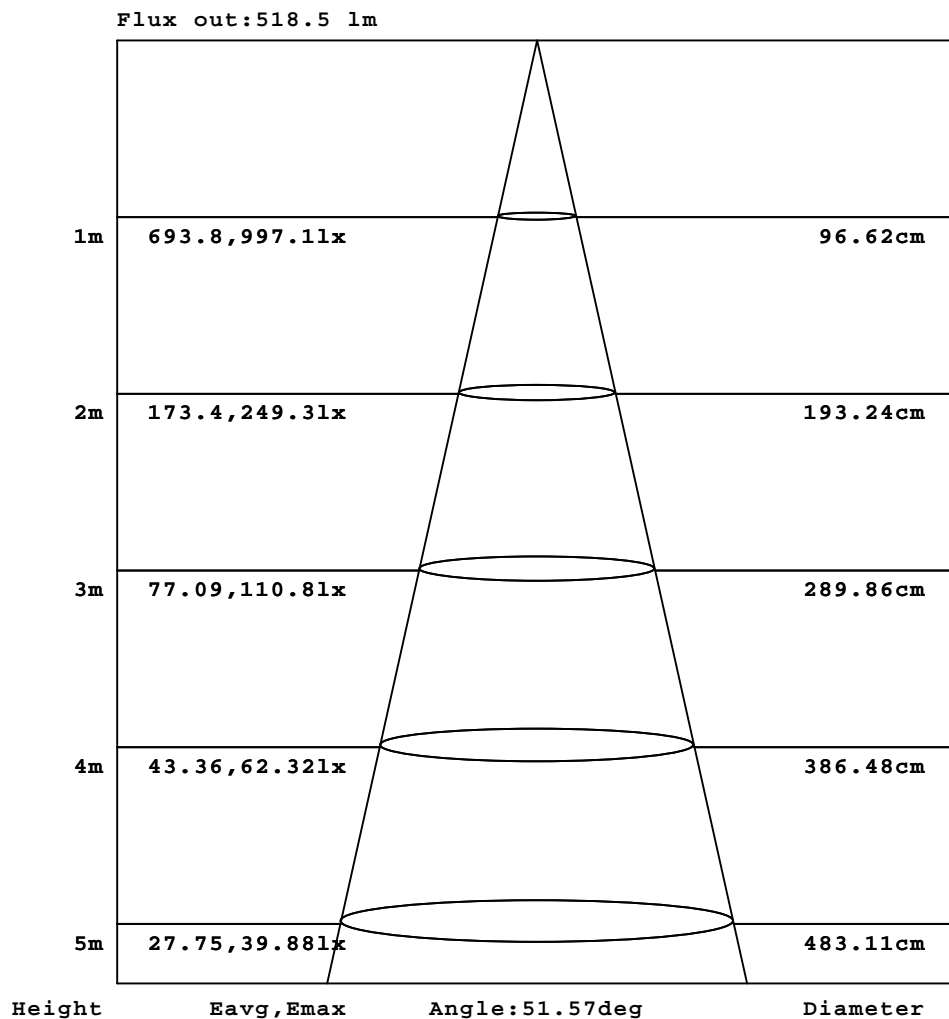


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Zoe
Test Date: 2022-9-22

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra:90
LENS: PM-1084C 50R
DRIVER: KEDH010S0250NR12A1 250mA
30minutes warm-up

ISOLUX DIAGRAM

Test:U:220.18V I:0.0582A P:11.894W PF:0.9249 Freq:49.99Hz Lamp Flux:967.126x1 lm		
NAME: 2218.117-ACOT-97	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209220942
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

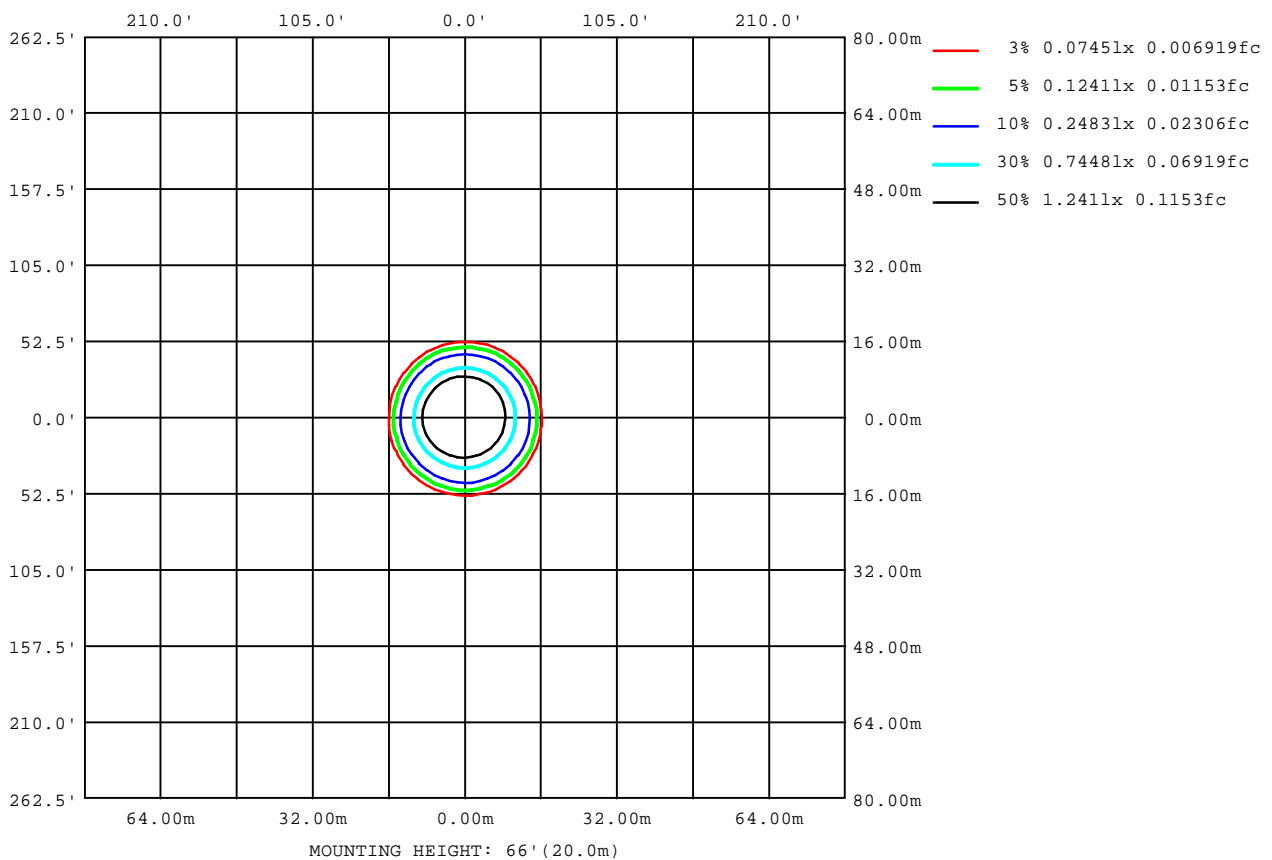

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-9-22

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS: PM-1084C 50R
DRIVER: KEDH010S0250NR12A1 250mA
30minutes warm-up

LED Avg.L Report

Test:U:220.18V I:0.0582A P:11.894W PF:0.9249 Freq:49.99Hz Lamp Flux:967.126x1 lm		
NAME: 2218.117-ACOT-97	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209220942
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	2951
L_0~180(75)av	515
L_0~180(85)av	347
L_90~270(65)av	2966
L_90~270(75)av	581
L_90~270(85)av	355
L_45(65)av	3403
L_45(75)av	1143
L_45(85)av	315

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-9-22

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS: PM-1084C 50R
DRIVER: KEDH010S0250NR12A1 250mA
30minutes warm-up

Planar Illuminance Curve

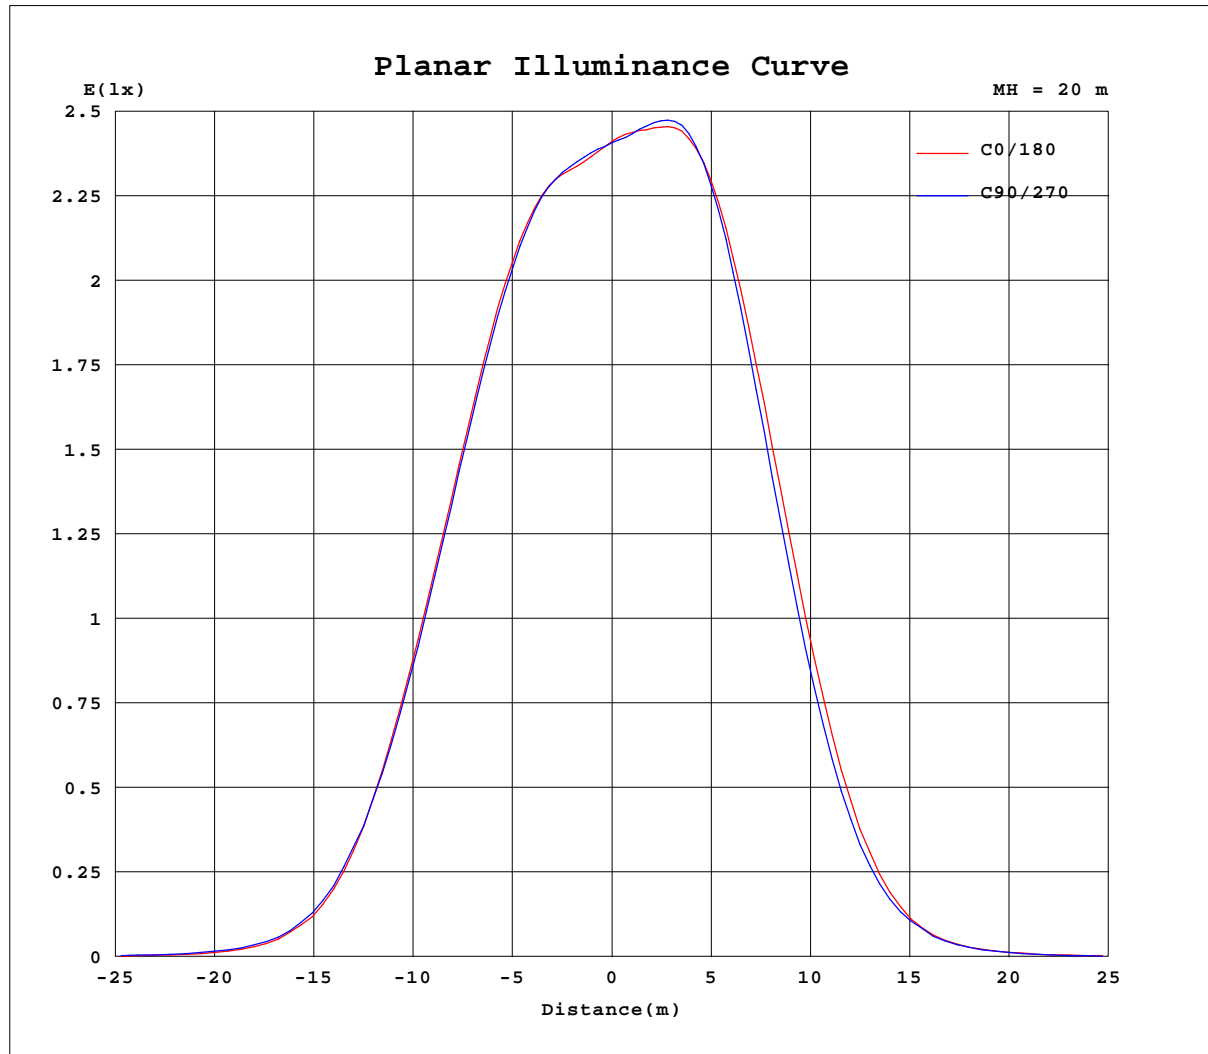

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Zoe
 Test Date: 2022-9-22

deg Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra:90
 LENS: PM-1084C 50R
 DRIVER: KEDH010S0250NR12A1 250mA
 30minutes warm-up

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.18V I:0.0582A P:11.894W PF:0.9249 Freq:49.99Hz Lamp Flux:967.126x1 lm		
NAME: 2218.117-ACOT-97	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209220942
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

Table--1

UNIT: cd

C(°) g (°)	0	30	60	90	120	150	180	210	240	270	300	330						
0	963	963	963	963	963	963	963	963	963	963	963	963						
5	944	934	937	951	967	979	988	997	1001	995	978	961						
10	941	916	917	941	973	998	1021	1034	1039	1030	1007	975						
15	882	856	855	874	925	957	989	1000	1008	981	974	923						
20	750	734	726	741	776	820	844	842	840	809	813	779						
25	559	552	544	550	564	595	607	581	578	557	567	563						
30	340	348	341	335	339	348	341	317	318	302	322	331						
35	146	157	157	154	150	148	139	127	130	124	136	141						
40	47.1	51.9	53.2	53.6	51.1	48.3	43.9	41.1	43.4	42.8	45.6	46.7						
45	16.1	18.5	18.5	20.3	18.8	18.6	16.9	15.1	15.7	15.7	17.2	16.4						
50	6.71	8.01	8.86	8.65	9.28	8.68	7.26	7.50	7.53	6.33	7.51	7.66						
55	3.17	4.25	5.06	3.93	5.01	4.92	3.43	4.20	4.12	2.92	3.76	4.12						
60	2.53	2.90	3.20	2.82	3.09	3.09	2.78	2.90	2.81	2.48	2.58	2.66						
65	1.89	2.25	2.45	2.21	2.41	2.43	2.10	2.29	2.21	1.81	2.03	2.07						
70	1.10	1.38	1.49	1.31	1.52	1.47	1.21	1.32	1.22	0.95	1.16	1.22						
75	0.23	0.51	0.56	0.29	0.53	0.53	0.20	0.36	0.35	0.19	0.32	0.42						
80	0.12	0.13	0.13	0.12	0.12	0.11	0.11	0.10	0.10	0.10	0.11	0.11						
85	0.05	0.05	0.05	0.06	0.05	0.04	0.04	0.04	0.03	0.04	0.04	0.04						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-9-22

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS: PM-1084C 50R
DRIVER: KEDH010S0250NR12A1 250mA
30minutes warm-up