

## Luminaire Photograph



Light Output Ratio:	49.7%	
Luminaire Power:	11.87 W	
SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	1.00	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Zoe  
Test Date: 2022-9-24

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra: 90  
LENS: PM-1084 15R  
DRIVER: KEDH010S0250NR12A1 250mA  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

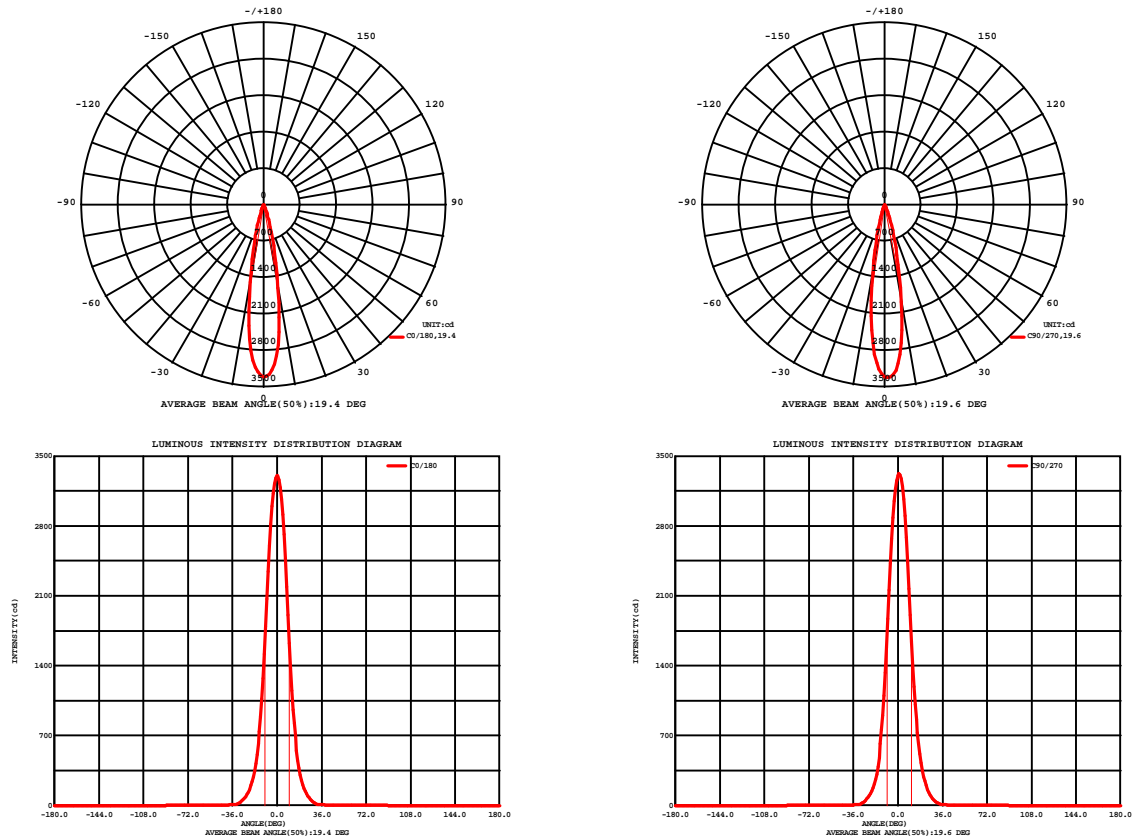


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Zoe  
Test Date: 2022-9-24

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra: 90  
LENS: PM-1084 15R  
DRIVER: KEDH010S0250NR12A1 250mA  
30minutes warm-up

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.23V I:0.0581A P:11.871W PF:0.9246 Freq:49.99Hz Lamp Flux:967.126x1 lm		
NAME: 2218.118-ACOT-97	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209240943
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 40.47 lm/W			
MODEL	CREE	I <sub>max</sub> (cd)	3326	S/MH(C0/180)	0.33
NOMINAL POWER(W)	12	LOR(%)	49.7	S/MH(C90/270)	0.30
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	480.43	h UP,DN(C0-180)	0.0,27.7
NOMINAL FLUX(lm)	967.126	CIE CLASS	DIRECT	h UP,DN(C180-360)	0.0,21.9
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220	h down(%)	49.7	CIBSE SHR MAX	1.00

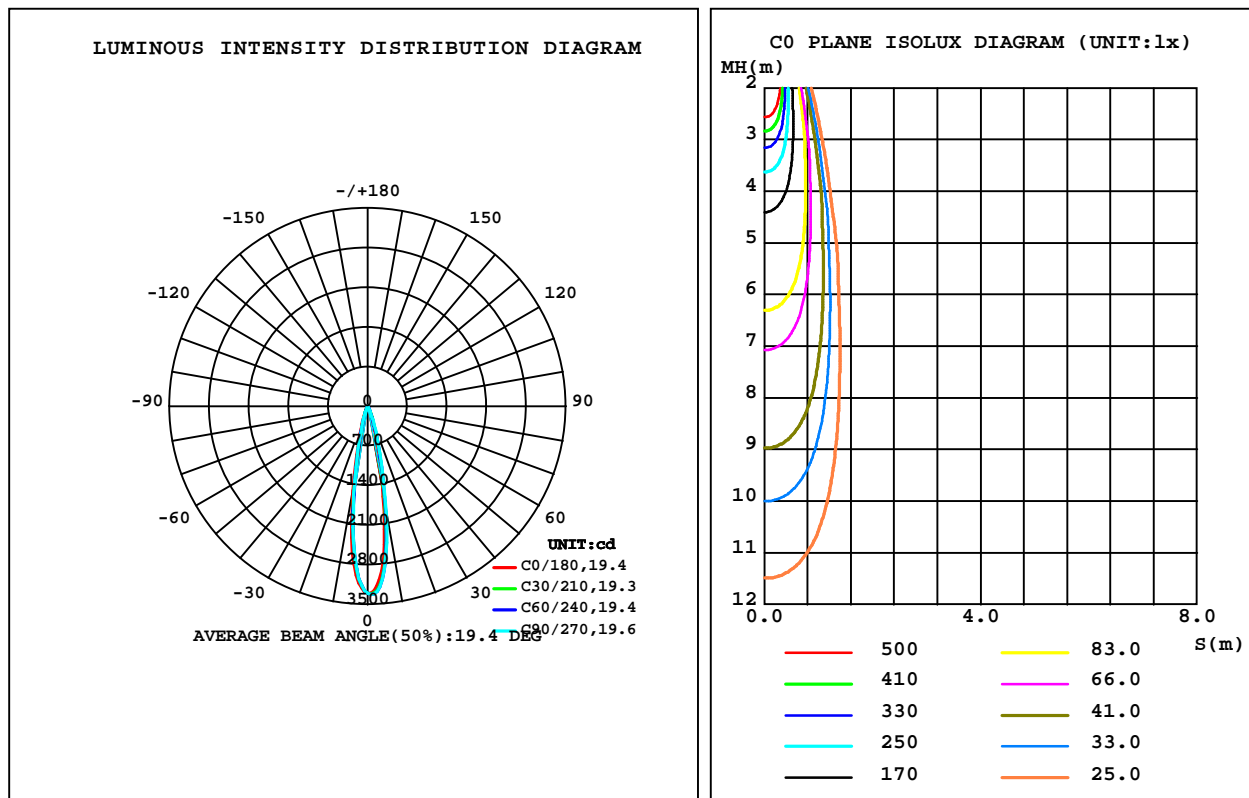

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-9-24

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH010S0250NR12A1 250mA  
30minutes warm-up

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1624	1829	1904	1655	1519	1326	1328	1453	0- 10	230.5	230.5	48,23.8
20	251.0	312.7	351.6	278.6	241.6	193.6	175.2	208.2	10- 20	186.3	416.8	86.8,43.1
30	27.99	46.73	43.09	44.11	27.95	26.94	15.47	28.91	20- 30	49.45	466.2	97,48.2
40	5.658	5.398	5.951	5.129	5.302	3.762	3.338	3.828	30- 40	8.230	474.5	98.8,49.1
50	2.588	2.398	2.950	2.270	2.410	1.776	1.710	1.753	40- 50	2.371	476.8	99.3,49.3
60	1.647	1.457	1.750	1.455	1.485	1.364	1.434	1.383	50- 60	1.584	478.4	99.6,49.5
70	1.396	1.225	1.376	1.161	1.179	1.058	0.3947	1.121	60- 70	1.353	479.8	99.9,49.6
80	0.1074	0.1522	0.2100	0.1498	0.1095	0.0584	0.0447	0.0574	70- 80	0.5975	480.4	100,49.7
90	0	0	0	0	0	0	0	0	80- 90	0.0569	480.4	100,49.7
100	0	0	0	0	0	0	0	0	90-100	0	480.4	100,49.7
110	0	0	0	0	0	0	0	0	100-110	0	480.4	100,49.7
120	0	0	0	0	0	0	0	0	110-120	0	480.4	100,49.7
130	0	0	0	0	0	0	0	0	120-130	0	480.4	100,49.7
140	0	0	0	0	0	0	0	0	130-140	0	480.4	100,49.7
150	0	0	0	0	0	0	0	0	140-150	0	480.4	100,49.7
160	0	0	0	0	0	0	0	0	150-160	0	480.4	100,49.7
170	0	0	0	0	0	0	0	0	160-170	0	480.4	100,49.7
180	0	0	0	0	0	0	0	0	170-180	0	480.4	100,49.7
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-9-24

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH010S0250NR12A1 250mA  
30minutes warm-up

## LUMINANCE LIMITATION CURVES

Test:U:220.23V I:0.0581A P:11.871W PF:0.9246 Freq:49.99Hz Lamp Flux:967.126x1 lm		
NAME: 2218.118-ACOT-97	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209240943
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

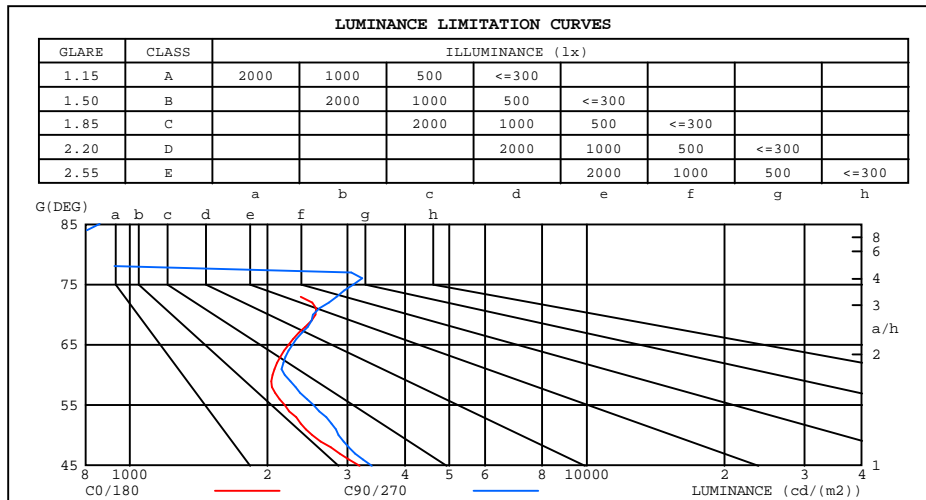

LUMINANCE cd/(m2)		
G(180)	C0/180	C90/270
85	416	862
80	386	756
75	456	3085
70	2547	2515
65	2230	2272
60	2055	2187
55	2181	2530
50	2511	2869
45	3181	3393


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-9-24

G Range: 0 - 180DEG  
G Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH010S0250NR12A1 250mA  
30minutes warm-up

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.23V I:0.0581A P:11.871W PF:0.9246 Freq:49.99Hz Lamp Flux:967.126x1 lm		
NAME: 2218.118-ACOT-97	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209240943
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	.59	.59	.59	.58	.58	.58	.55	.55	.55	.53	.53	.53	.51	.51	.51	.50
1.0	.56	.55	.55	.55	.54	.54	.53	.53	.52	.51	.51	.51	.50	.49	.49	.48
2.0	.54	.53	.51	.53	.52	.51	.52	.51	.50	.50	.49	.49	.49	.48	.48	.47
3.0	.52	.50	.49	.51	.50	.49	.50	.49	.48	.49	.48	.47	.48	.47	.47	.46
4.0	.50	.48	.47	.50	.48	.47	.49	.47	.46	.48	.47	.46	.47	.46	.45	.45
5.0	.49	.47	.46	.48	.47	.45	.48	.46	.45	.47	.46	.45	.46	.45	.44	.44
6.0	.47	.46	.44	.47	.45	.44	.46	.45	.44	.46	.45	.44	.45	.44	.43	.43
7.0	.46	.44	.43	.46	.44	.43	.45	.44	.43	.45	.44	.43	.44	.43	.42	.42
8.0	.45	.43	.42	.45	.43	.42	.44	.43	.42	.44	.43	.42	.44	.42	.41	.41
9.0	.44	.42	.41	.44	.42	.41	.43	.42	.41	.43	.42	.41	.43	.42	.41	.40
10.0	.43	.41	.40	.43	.41	.40	.43	.41	.40	.42	.41	.40	.42	.41	.40	.39

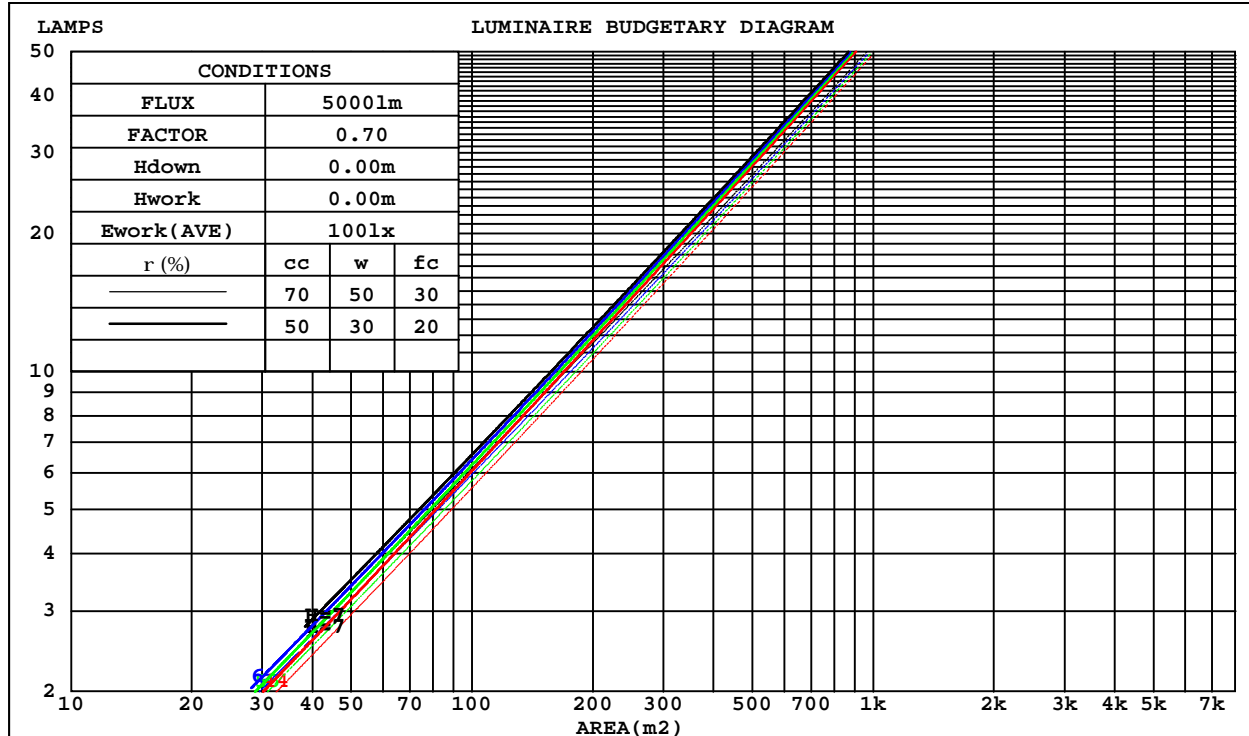

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-9-24

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH010S0250NR12A1 250mA  
30minutes warm-up

### WEC AND CCEC

Test:U:220.23V I:0.0581A P:11.871W PF:0.9246 Freq:49.99Hz Lamp Flux:967.126x1 lm		
NAME: 2218.118-ACOT-97	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209240943
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.063	.036	.011	.060	.034	.011	.054	.031	.010	.048	.028	.009	.043	.025	.008	
2.0	.058	.032	.010	.055	.031	.009	.050	.028	.009	.046	.026	.008	.041	.023	.007	
3.0	.054	.029	.009	.051	.028	.008	.047	.026	.008	.043	.024	.007	.040	.022	.007	
4.0	.050	.026	.008	.048	.025	.007	.045	.024	.007	.041	.022	.007	.038	.021	.006	
5.0	.047	.024	.007	.045	.023	.007	.042	.022	.006	.039	.021	.006	.037	.020	.006	
6.0	.044	.022	.006	.043	.022	.006	.040	.021	.006	.038	.020	.006	.035	.019	.006	
7.0	.041	.021	.006	.040	.020	.006	.038	.019	.006	.036	.019	.005	.034	.018	.005	
8.0	.039	.019	.005	.038	.019	.005	.036	.018	.005	.035	.018	.005	.033	.017	.005	
9.0	.037	.018	.005	.037	.018	.005	.035	.017	.005	.033	.017	.005	.032	.016	.005	
10.0	.036	.017	.005	.035	.017	.005	.034	.016	.005	.032	.016	.005	.031	.016	.004	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.095	.095	.095	.081	.081	.081	.055	.055	.055	.032	.032	.032	.010	.010	.010	
1.0	.083	.078	.074	.071	.067	.064	.049	.046	.044	.028	.027	.026	.009	.009	.008	
2.0	.074	.066	.059	.063	.057	.051	.043	.039	.036	.025	.023	.021	.008	.007	.007	
3.0	.066	.056	.048	.057	.049	.042	.039	.034	.029	.023	.020	.017	.007	.006	.006	
4.0	.060	.049	.040	.051	.042	.035	.035	.029	.024	.020	.017	.014	.007	.006	.005	
5.0	.054	.042	.034	.047	.037	.029	.032	.026	.021	.019	.015	.012	.006	.005	.004	
6.0	.050	.037	.028	.043	.032	.025	.029	.023	.017	.017	.013	.010	.006	.004	.003	
7.0	.046	.033	.024	.039	.029	.021	.027	.020	.015	.016	.012	.009	.005	.004	.003	
8.0	.042	.030	.021	.036	.026	.018	.025	.018	.013	.015	.011	.008	.005	.003	.003	
9.0	.039	.027	.018	.034	.023	.016	.023	.016	.011	.014	.010	.007	.004	.003	.002	
10.0	.037	.024	.016	.032	.021	.014	.022	.015	.010	.013	.009	.006	.004	.003	.002	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-9-24

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH010S0250NR12A1 250mA  
30minutes warm-up

## UGR(Unified Glare Rating) Table

Test:U:220.23V I:0.0581A P:11.871W PF:0.9246 Freq:49.99Hz Lamp Flux:967.126x1 lm										
NAME: 2218.118-ACOT-97					TYPE:			WEIGHT:		
SPEC.:3000K					DIM.:			SERIAL No.:2209240943		
MFR.: RISE					SUR.:0.0016m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.8	5.3	5.0	5.5	5.6	6.1	6.7	6.3	6.9	7.0
3H	6.0	6.6	6.3	6.8	6.9	7.0	7.5	7.2	7.7	7.9
4H	6.4	6.9	6.7	7.1	7.3	7.7	8.2	7.9	8.4	8.6
6H	6.4	6.9	6.6	7.1	7.3	7.9	8.4	8.2	8.6	8.8
8H	6.3	6.8	6.6	7.1	7.3	7.9	8.3	8.2	8.6	8.8
12H	6.3	6.8	6.6	7.0	7.3	7.8	8.3	8.1	8.6	8.8
4H 2H	5.0	5.6	5.3	5.8	6.0	6.3	6.8	6.5	7.0	7.2
3H	6.6	7.1	6.9	7.4	7.6	7.4	7.8	7.7	8.1	8.4
4H	7.2	7.6	7.5	7.9	8.2	8.3	8.7	8.6	9.0	9.3
6H	7.1	7.5	7.5	7.8	8.1	8.5	8.9	8.9	9.2	9.5
8H	7.1	7.4	7.4	7.8	8.1	8.5	8.8	8.9	9.2	9.5
12H	7.0	7.3	7.4	7.7	8.1	8.4	8.8	8.8	9.1	9.5
8H 4H	7.4	7.7	7.8	8.1	8.4	8.4	8.8	8.8	9.1	9.5
6H	7.3	7.6	7.7	8.0	8.4	8.6	8.9	9.1	9.3	9.7
8H	7.3	7.5	7.7	8.0	8.4	8.6	8.9	9.1	9.3	9.7
12H	7.2	7.5	7.7	7.9	8.4	8.6	8.8	9.1	9.3	9.7
12H 4H	7.3	7.7	7.7	8.0	8.4	8.4	8.7	8.8	9.1	9.4
6H	7.3	7.5	7.7	7.9	8.4	8.6	8.8	9.0	9.3	9.7
8H	7.2	7.5	7.7	7.9	8.4	8.6	8.8	9.0	9.2	9.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.7 / - 0.7					+ 0.5 / - 0.6				
1.5H	+ 1.2 / - 0.7					+ 1.0 / - 0.5				
2.0H	+ 1.4 / - 1.2					+ 0.4 / - 0.6				

CIE Pub.117, 967.1 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.1)  
Area: 0.0016 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-9-24

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH010S0250NR12A1 250mA  
30minutes warm-up



## UTILIZATION FACTORS TABLE

Test:U:220.23V I:0.0581A P:11.871W PF:0.9246 Freq:49.99Hz Lamp Flux:967.126x1 lm		
NAME: 2218.118-ACOT-97	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209240943
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	45	42	41	45	42	41	45	42	40	39
0.80	49	46	44	48	46	44	48	46	44	42
1.00	50	48	46	50	48	46	49	48	46	44
1.25	52	50	48	52	50	48	51	49	48	46
1.50	53	51	50	53	51	50	52	50	49	47
2.00	54	53	51	54	52	51	52	51	50	48
2.50	55	54	52	54	53	52	53	52	51	48
3.00	56	54	53	55	54	53	53	52	52	48
4.00	57	56	55	56	55	54	54	53	53	49
5.00	57	56	56	56	56	55	54	54	53	50
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-9-24

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH010S0250NR12A1 250mA  
30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:220.23V I:0.0581A P:11.871W PF:0.9246 Freq:49.99Hz Lamp Flux:967.126x1 lm		
NAME: 2218.118-ACOT-97	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209240943
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

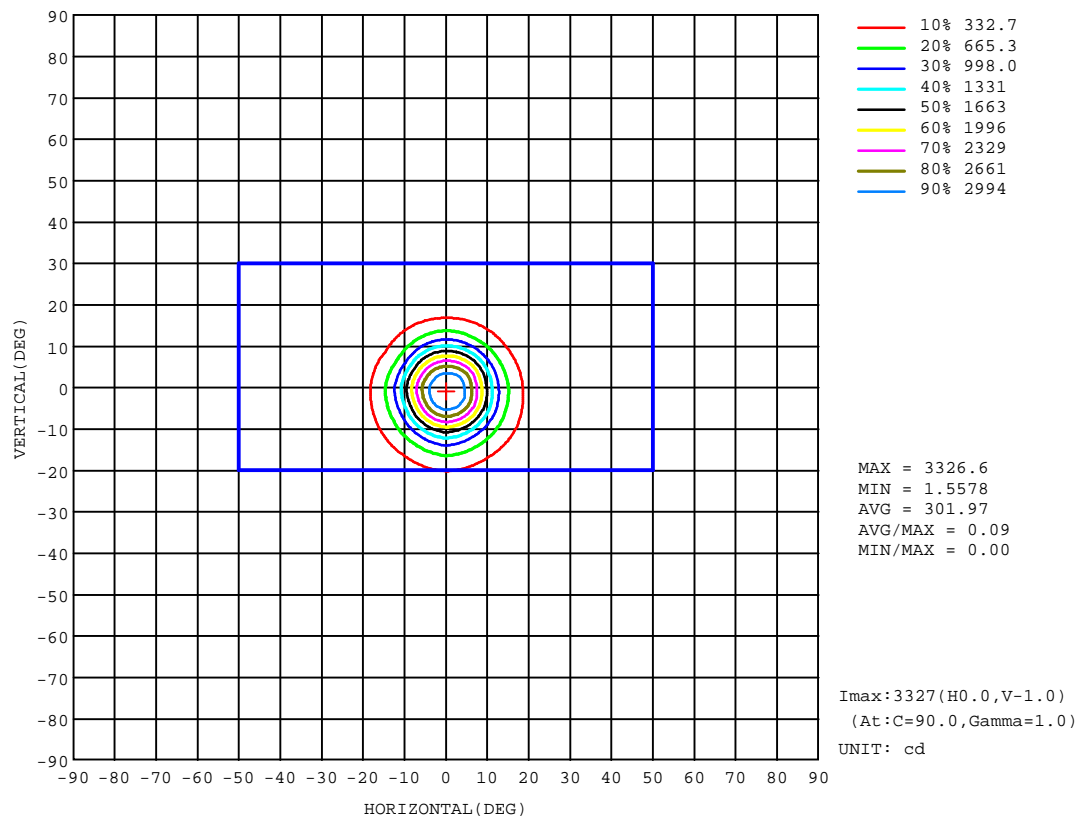


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-9-24

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH010S0250NR12A1 250mA  
30minutes warm-up

### AAI Figure

Test:U:220.23V I:0.0581A P:11.871W PF:0.9246 Freq:49.99Hz Lamp Flux:967.126x1 lm		
NAME: 2218.118-ACOT-97	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209240943
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

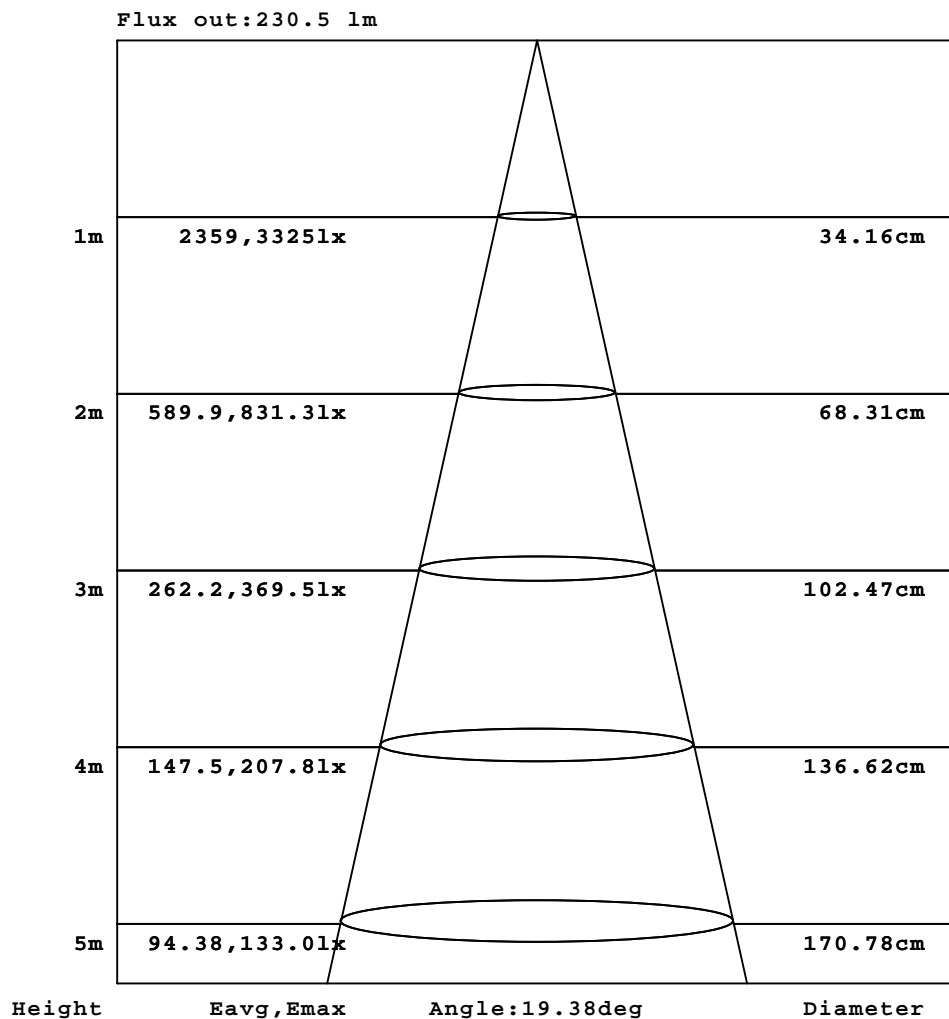


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-9-24

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH010S0250NR12A1 250mA  
30minutes warm-up

## ISOLUX DIAGRAM

Test:U:220.23V I:0.0581A P:11.871W PF:0.9246 Freq:49.99Hz Lamp Flux:967.126x1 lm		
NAME: 2218.118-ACOT-97	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209240943
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

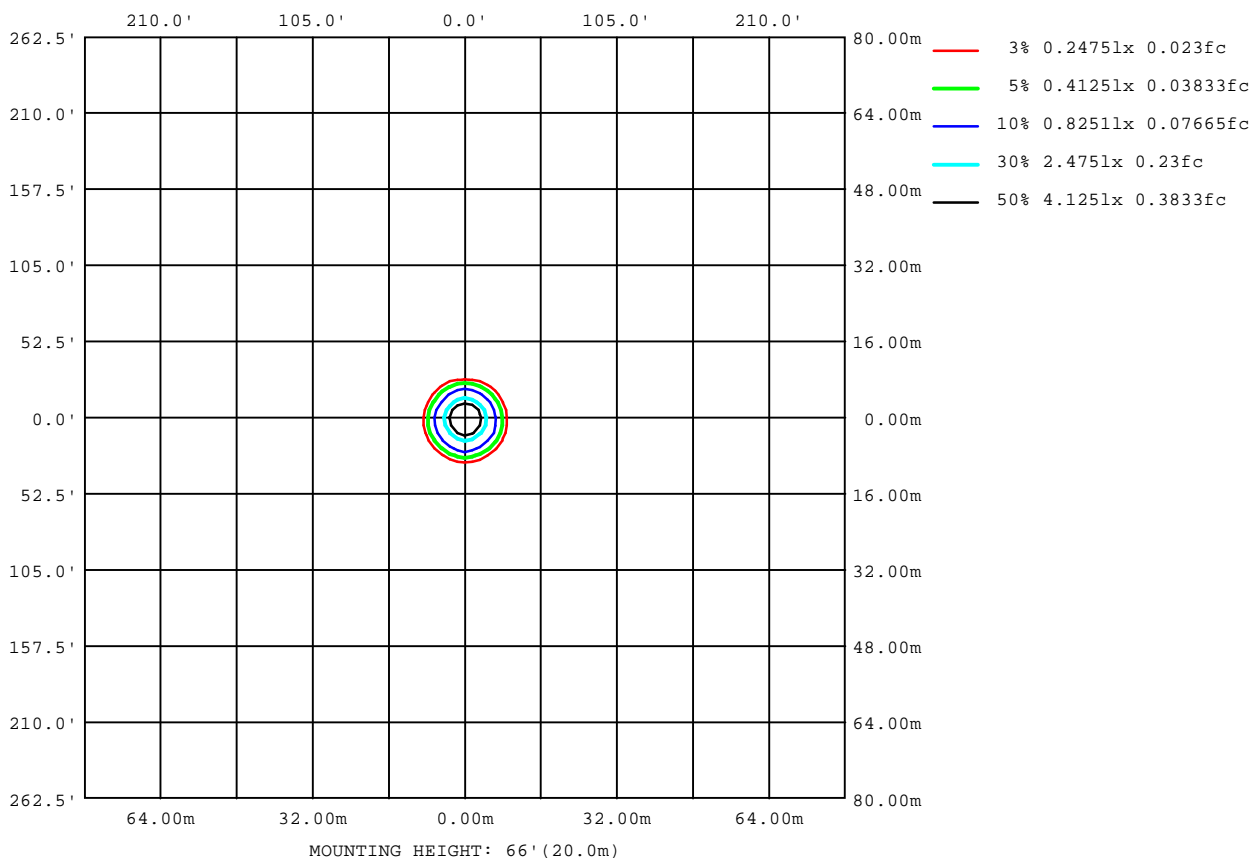

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-9-24

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH010S0250NR12A1 250mA  
30minutes warm-up

## LED Avg.L Report

Test:U:220.23V I:0.0581A P:11.871W PF:0.9246 Freq:49.99Hz Lamp Flux:967.126x1 lm		
NAME: 2218.118-ACOT-97	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209240943
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	2092
L_0~180(75)av	460
L_0~180(85)av	411
L_90~270(65)av	2308
L_90~270(75)av	1661
L_90~270(85)av	480
L_45(65)av	1960
L_45(75)av	1352
L_45(85)av	290

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-9-24

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH010S0250NR12A1 250mA  
30minutes warm-up

## Planar Illuminance Curve

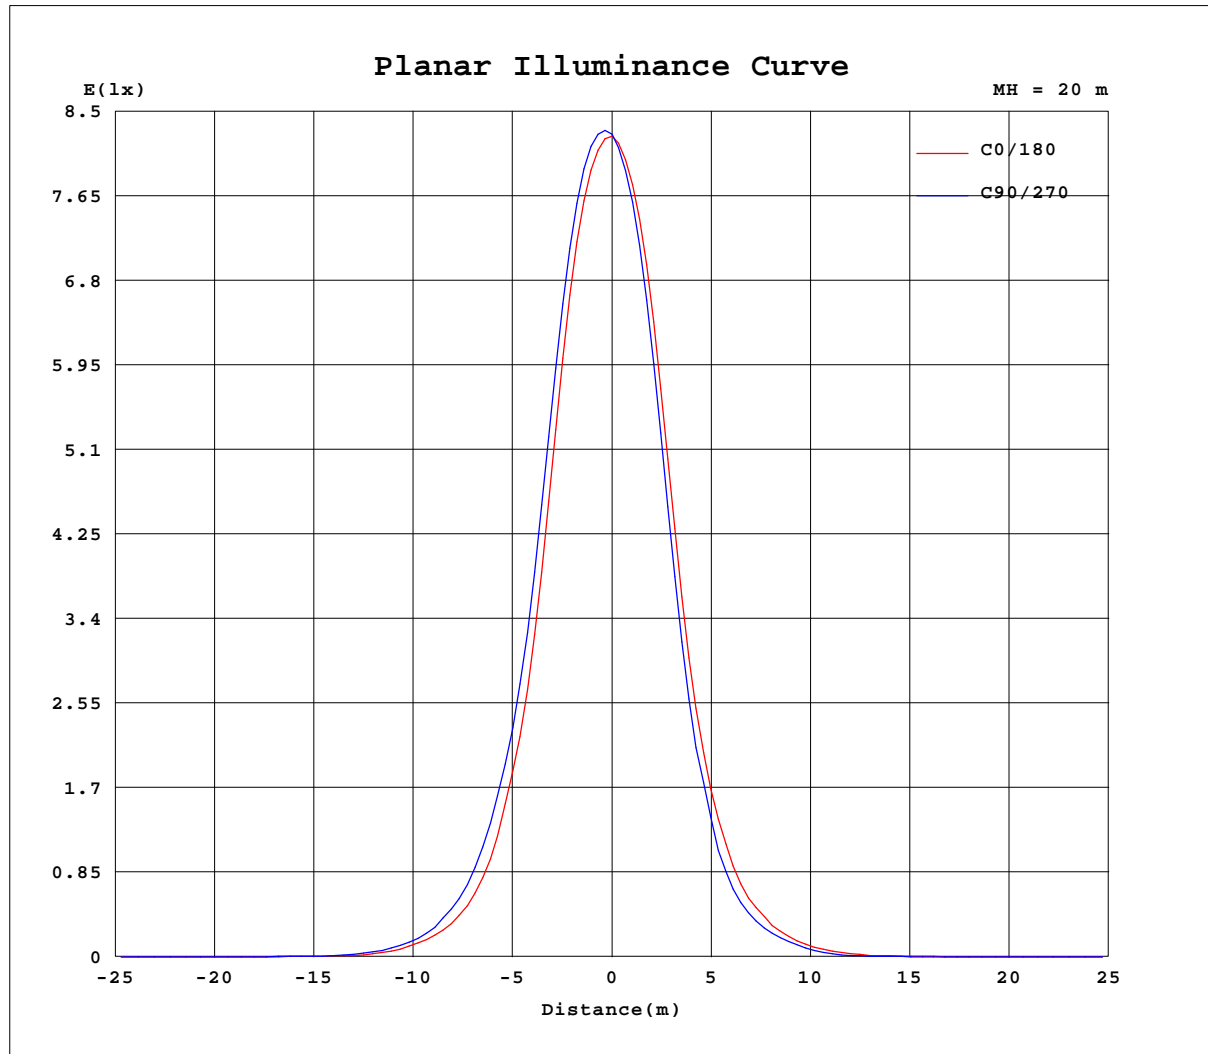

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: Zoe  
 Test Date: 2022-9-24

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra:90  
 LENS: PM-1084 15R  
 DRIVER: KEDH010S0250NR12A1 250mA  
 30minutes warm-up

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.23V I:0.0581A P:11.871W PF:0.9246 Freq:49.99Hz Lamp Flux:967.126x1 lm		
NAME: 2218.118-ACOT-97	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2209240943
MFR.: RISE	SUR.:0.0016m2	Shielding Angle:

Table--1

UNIT: cd

C(°) g (°)	0	30	60	90	120	150	180	210	240	270	300	330						
0	3307	3307	3307	3307	3307	3307	3307	3307	3307	3307	3307	3307						
5	2916	3030	3066	3065	2989	2881	2820	2712	2675	2671	2748	2867						
10	1624	1804	1854	1904	1741	1568	1519	1333	1318	1328	1381	1525						
15	686	751	797	860	745	650	618	470	483	476	502	545						
20	251	310	315	352	292	265	242	196	191	175	199	217						
25	94.7	120	133	130	124	108	89.6	81.5	72.8	66.2	77.8	90.1						
30	28.0	43.8	49.7	43.1	47.6	40.6	28.0	29.0	24.9	15.5	26.2	31.6						
35	9.73	13.6	16.9	11.0	15.9	12.6	9.62	9.58	6.75	6.58	6.70	9.88						
40	5.66	5.33	5.46	5.95	5.17	5.09	5.30	4.13	3.39	3.34	3.43	4.23						
45	3.61	3.29	3.35	3.84	3.23	3.07	3.33	2.50	2.10	2.11	2.04	2.56						
50	2.59	2.31	2.49	2.95	2.36	2.18	2.41	1.89	1.66	1.71	1.60	1.91						
55	2.01	1.76	2.03	2.32	1.94	1.69	1.88	1.56	1.43	1.43	1.41	1.58						
60	1.65	1.42	1.50	1.75	1.52	1.39	1.49	1.35	1.38	1.43	1.35	1.41						
65	1.51	1.31	1.29	1.54	1.30	1.24	1.32	1.35	1.43	1.58	1.39	1.43						
70	1.40	1.25	1.20	1.38	1.20	1.13	1.18	1.03	1.09	0.39	1.07	1.18						
75	0.19	0.98	1.00	1.28	0.99	0.87	0.19	0.15	0.11	0.10	0.11	0.16						
80	0.11	0.13	0.18	0.21	0.17	0.13	0.11	0.07	0.05	0.04	0.04	0.07						
85	0.06	0.06	0.08	0.12	0.08	0.06	0.06	0.03	0.01	0.01	0.01	0.03						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-9-24

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH010S0250NR12A1 250mA  
30minutes warm-up