




BRAVO-85-STA4



Product specification

INTERIOR RECESSED DOWNLIGHTS

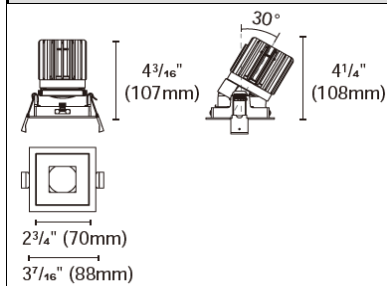

Cut out :
3⁵/₃₂" X 3⁵/₃₂"

Technical Specification

Article number	2218.142-LEA-14	
LED Consumption	16W (NON-IC)	14W (IC)
Fixture Consumption	20W	-
Current / Voltage	450mA / 33.7Vdc	400mA / 33.3Vdc
CRI	90+	90+
CCT	3000K	3000K
LED Lumen ^{*1}	1825lm	1642lm
Delivered Lumen	-	-
Beam Angle available	15°/24°/36°/50° (Lens)	

Driver Technical Specification

Driver Brand	EUCHIPS	Driver Model	PUP20A-1WMC
Input voltage / Frequency range	120-277Vac / 50/60Hz	Output Current / Voltage	450mA / 9-44Vdc
Dimming / Flicker	0/1-10V / Flicker-free	Certification	UL
Power Factor	>0.9	Warranty	-

Technical character

Products Standard	UL1598
Insulation	CLASS III
Protection	Damp Location
Tilt / Rotate	0~30° / None
Operating temperature	0~35°C
Average Failure Time	L70(10k) >55000(h)

Materials

Luminaire	Aluminum die cast
Trim	Aluminum die cast
Optics	PMMA Lens
Heat sink	Forged aluminum
Fixture color available	white / black
Baffle	Aluminum die cast
Baffle Color available	white / black

Accessories



ACSG-4
Striped glass



ACHO-5
Honeycomb louver



ACDS-4
Diffusion sheet



ACWG-5
Woven glass

Photometric

Remarks




*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.

INSTALLATION OPTIONS




ACCG-22B-PUP20A-1WMC 0/1-10V
ACCG-22B-PUP20D-1WMC DALI
ACCG-22B-PUP20T-1LMC TRIAC


for BRAVO-2.8" round / square (20W)
 Type: Gear box

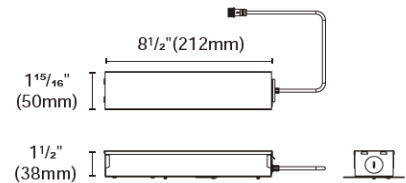

Internal space dimension:
 L 8 3/4" (209mm) X W 1 7/8" (48mm) X H 1 5/16" (33mm)

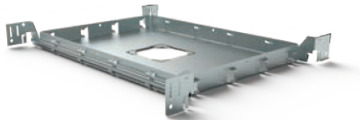


ACCH-12-80
 for BRAVO-2.8" round / square (8W/20W)
 Type: New construction plate



ACCI-5
 Type: Remodel stand



ACCH-12D-80-PUP20A-1WMC 0/1-10V
ACCH-12D-80-PUP20D-1WMC DALI
ACCH-12D-80-PUP20T-1LMC TRIAC
 for BRAVO-2.8" round / square (20W)
 Type: IC Box



Driver is secured on patent designed bracket



ACCI-3
 Type: Emergency battery holder
 For BillDa emergency led driver-
 Model NO. BLD-HM08D-YYY
 BLD-HM15D-YYY
 BLD-HM20D-YYY
 BLD-HM25D-YYY

