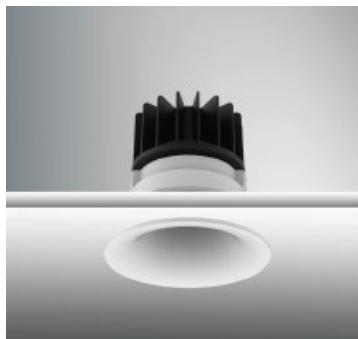





FARFALLA-85-RTF1



## Product specification

## INTERIOR RECESSED DOWNLIGHTS



75

## Technical Specification

Article number 2218.207-ACOT-36

LED Consumption 14W

Fixture Consumption -

Current / Voltage 350mA / 38.4Vdc

CRI 90+

CCT 2700K 3000K 4000K

LED Lumen \*1 1139lm 1193lm 1282lm

Delivered Lumen - 1019lm -

Beam Angle available 15°/24°/36°/50° (Lens)

## Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Freqency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-





## Technical character

## Materials

Products Standard	IEC 60598-1	Luminaire	Aluminum die cast
	IEC 62031	Optics	PMMA Lens
Insulation	CLASS II	Heat sink	Forged aluminum
Protection	IP44	Fixture color available	white / black
Tilt / Rotate	None / None		
Operating temperature	0~35°C		
Average Failure Time	-		

## Accessories

## Photometric

SG7-1  
Striped glassH7-1  
Honeycomb louverDS7-1  
Diffusion sheetWG7-1  
Woven glassACOT-82  
MR16 Accessory kitsACOT-83  
GU10 Accessory kitsPJ-0079  
MR16&GU10  
AccessoryACOT-34  
Collar

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.