





FARFALLA-85-RTL

Product specification

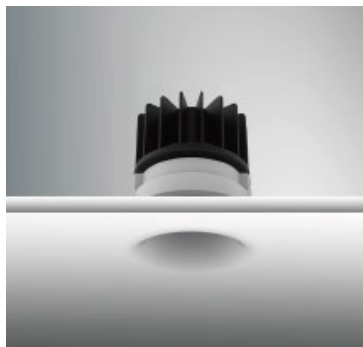

INTERIOR RECESSED DOWNLIGHTS



82

Technical Specification

Article number	2218.207F-ACOT-36		
LED Consumption	14W		
Fixture Consumption	-		
Current / Voltage	350mA / 38.4Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	1139lm	1193lm	1282lm
Delivered Lumen	-	1019lm	-
Beam Angle available	15°/24°/36°/50° (Lens)		

Driver Technical Specification (Remoted)


Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character


Products Standard	IEC 60598-1	Luminaire	Aluminum die cast
	IEC 62031	Optics	PMMA Lens
Insulation	CLASS II	Heat sink	Forged aluminum
Protection	IP44	Fixture color available	white / black
Tilt / Rotate	None / None		
Operating temperature	0~35°C		
Average Failure Time	-		

Accessories


Photometric

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glass

h(m)	Ø(m)	E(lx)
15°		
1.0	0.23	12225
2.0	0.46	3056
3.0	0.70	1358
4.0	0.93	764
5.0	1.16	489



h(m)	Ø(m)	E(lx)
24°		
1.0	0.44	5169
2.0	0.87	1292
3.0	1.31	574
4.0	1.75	323
5.0	2.18	206

ACOT-82
MR16 Accessory kitsACOT-83
GU10 Accessory kitsPJ-0079
MR16&GU10
AccessoryACOT-34
Collar

h(m)	Ø(m)	E(lx)
36°		
1.0	0.66	2603
2.0	1.32	650
3.0	1.97	289
4.0	2.63	162
5.0	3.29	104

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.