



STAR-50-STLF1



Product specification

INTERIOR RECESSED DOWNLIGHTS

2.50"
(64mm)

1.79" (46mm)

3.77" (96mm)

Technical Specification			
Article number	2218.208A-ACOT-96		
LED Consumption	7W		
Fixture Consumption	-		
Current / Voltage	350mA / 17.8Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	618lm	656lm	716lm
Delivered Lumen	-	520lm	-
Beam Angle available	20°/25°/35°/50° (Lens)		
Driver Technical Specification (Remoted)			
Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-


Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	Aluminum die cast
	IEC 62031	Trim	Aluminum die cast
Insulation	CLASS II	Optics	PMMA Lens
Protection	IP44	Heat sink	Forged aluminum
Tilt / Rotate	Non / Non	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	L70(11k) >61000(h)	Baffle Color available	white / black

Accessories

ACHO-18
honeycomb louver
+PC sheet

SG-002
Striped Glass

Photometric

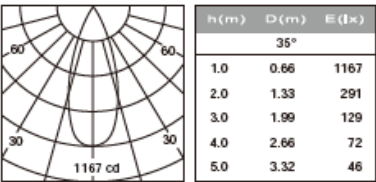

Remarks

TRIAC

1-10V

UGR <18

*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.