



STAR-50-STLA2



Product specification

INTERIOR RECESSED DOWNLIGHTS

3.86" (98mm)
1.79" (46mm)
3.76" (96mm)
3.77" (96mm)
30°

Technical Specification

Article number	2218.209A-ACOT-97		
LED Consumption	10W		
Fixture Consumption	-		
Current / Voltage	250mA / 36.5Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen *1	871lm	913lm	981lm
Delivered Lumen	-	655lm	-
Beam Angle available	20°/25°/35°/50° (Lens)		

Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-


Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	Aluminum die cast
	IEC 62031	Trim	Aluminum die cast
Insulation	CLASS II	Optics	PMMA Lens
Protection	IP44	Heat sink	Forged aluminum
Tilt / Rotate	0~30° / Non	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time		Baffle Color available	white / black

Accessories

ACHO-18
honeycomb louver
+PC sheet

SG-002
Striped Glass

Photometric

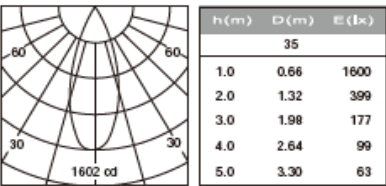

Remarks

TRIAC

1-10V

UGR <18

*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.