




STARLUX-FLAT-RTL A



Product specification

INTERIOR RECESSED DOWNLIGHTS



Cut out :
2 12/32" (60mm)


Technical Specification

Article number	2218.240F-LEA-09B		
LED Consumption	10W		
Fixture Consumption	10W		
Current / Voltage	500mA / 18.3Vdc		
CRI	90+		
CCT	3000K	3000K	3000K
LED Lumen ^{*1}	871lm	913lm	981lm
Delivered Lumen	-	-	-
Beam Angle available	15°/24°/36°/50° (Lens)		
Driver Technical Specification (Remoted)			
Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character		Materials	
Products Standard	UL2108	Luminaire	Aluminum die cast
	-	Trimless	Sheet
Insulation	CLASS III	Optics	PMMA Lens
Protection	Damp Location	Heat sink	Forged aluminum
Tilt / Rotate	0~30° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	-	Baffle Color available	white / black

Accessories

Photometric



ACHO-18
honeycomb louver
+PC sheet



SG-002
Striped Glass

Remarks





*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.

INSTALLATION OPTIONS



KIG-040-DWJ

Triac/Phase, 0-10V, 1-10V, Potentiometer,
10V PWM 5 in 1 dimming
40W, 1-3T
Type: Gear box

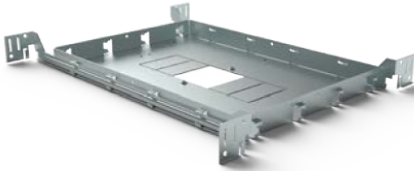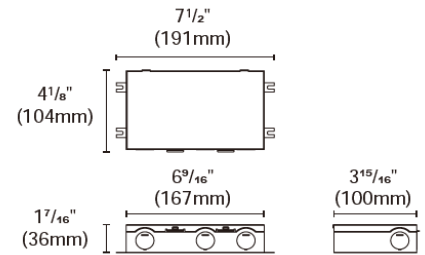


ACCH-12-60X180 for Multiple 1T/2T/3T

Type: New construction plate

Cut out:

1T : $2\frac{1}{2}\frac{3}{32}$ "x $2\frac{1}{2}\frac{3}{32}$ " (60x60mm)
2T : $2\frac{1}{2}\frac{3}{32}$ "x $4\frac{23}{32}$ " (60x120mm)
3T : $2\frac{1}{2}\frac{3}{32}$ "x $7\frac{3}{32}$ " (60x180mm)



* Cutout accessories are available for different cutout dimensions




ACCH-12G-60X180 for Multiple 1T/2T

Type: IC Box


Cut out:

1T : $2\frac{1}{2}\frac{3}{32}$ "x $2\frac{1}{2}\frac{3}{32}$ " (60x60mm)
2T : $2\frac{1}{2}\frac{3}{32}$ "x $4\frac{23}{32}$ " (60x120mm)

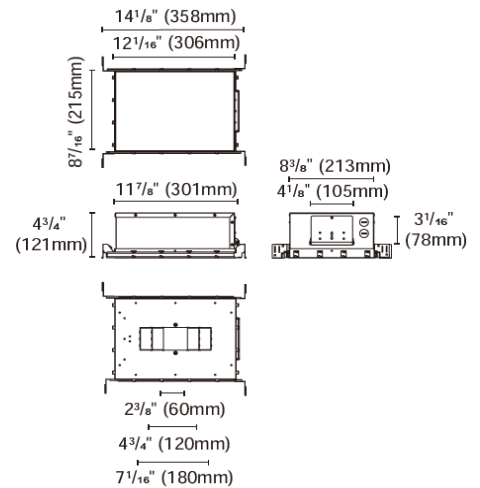

* Cutout accessories are available for different cutout dimensions

Cutout accessories



ACCI-10-R54-R60 for round

Cut out:

Trim : $2\frac{1}{32}$ " (54mm)
Trimless : $2\frac{1}{32}$ " (60mm)

INSTALLATION OPTIONS

Optional driver available



KIG-040-DW

Type: Drive

Triac / 0-10V/1-10V/Potentiometer/10V
PWM 5 in 1 Dimmable LED driver
Multi-current output series 40W
For 1-3T



PUP10A-1WMC-700

Type: Driver

0/1-10V
Output: 500mA/2-20V/10W
400mA/2-21V/8.4W
For 1T



PUP20A-1WMC

Type: Drive

0/1-10V
Output: 500mA/9-40V/20W
400mA/9-45V/18W
For 1-2T



PUP10T-1LMC-700

Type: Driver

Triac
Output: 500mA/2-20VDC/10W
400mA/2-21VDC/8.4W
For 1T



PUP20T-1LMC

Type: Driver

Triac
Output: 500mA/9-40V/20W
400mA/9-45V/18W
For 1-2T



PUP10D-1WMC-700

Type: Driver

Dali
Output: 500mA/2-20V/10W
400mA/2-21V/8.4W
For 1T



PUP20D-1WMC

Type: Driver

Dali
Output: 500mA/9-40V/20W
400mA/9-45V/18W
For 1-2T



ACOT-106

Type: Quick connector