

### Luminaire Photograph



Light Output Ratio:	65.6%	
Luminaire Power:	10.33 W	
SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	0.30	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2023-11-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXR-V-DR-1830G-0600-B-23 Ra: 90  
LENS: PM-1103 15R+DIFFUSER  
DRIVER: 9290 028 088 250mA  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

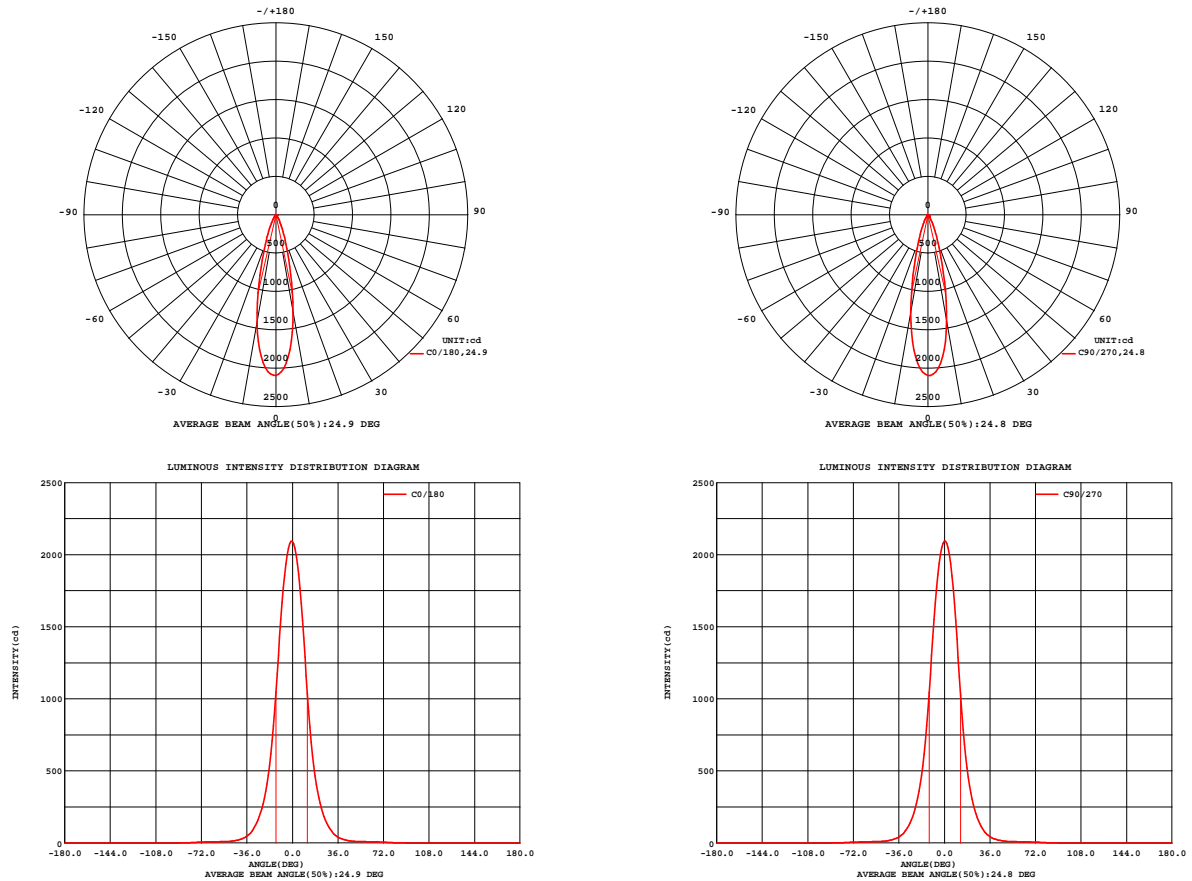


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2023-11-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXR-V-DR-1830G-0600-B-23 Ra: 90  
LENS: PM-1103 15R+DIFFUSER  
DRIVER: 9290 028 088 250mA  
30minutes warm-up

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.21V I:0.0488A P:10.326W PF:0.9587 Freq:49.99Hz Lamp Flux:814.298x1 lm		
NAME: 2218.511-ACOT-97-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2311161338
MFR.: RISE	SUR.: 0.001589625m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 51.75 lm/W			
MODEL	Bridgelux	Imax(cd)	2095	S/MH(C0/180)	0.44
NOMINAL POWER(W)	10	LOR(%)	65.6	S/MH(C90/270)	0.41
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	534.35	UP,DN(C0-180)	0.0,33.4
NOMINAL FLUX(lm)	814.298	CIE CLASS	DIRECT	UP,DN(C180-360)	0.0,32.2
LAMPS INSIDE	1	up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220	down(%)	65.6	CIBSE SHR MAX	0.30

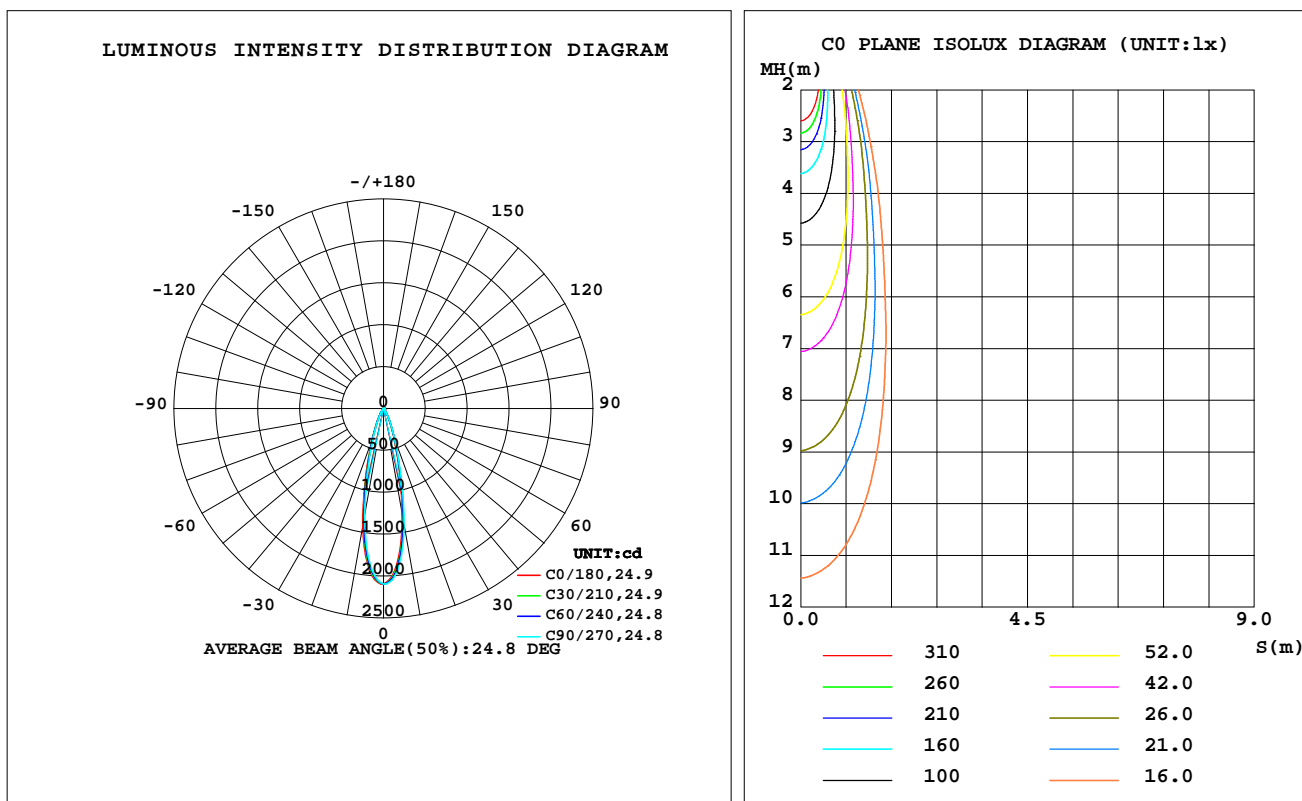

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-11-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1103 15R+DIFFUSER  
DRIVER:9290 028 088 250mA  
30minutes warm-up

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

	C0	C45	C90	C135	C180	C225	C270	C315		zone	total	%lum,lamp
10	1290	1352	1414	1448	1432	1368	1298	1268	0- 10	163.7	163.7	30.6,20.1
20	358.8	378.8	397.3	415.1	410.0	385.5	358.2	349.2	10- 20	210.1	373.9	70,45.9
30	93.70	96.49	101.4	108.2	106.7	98.57	92.35	91.15	20- 30	93.24	467.1	87.4,57.4
40	26.05	26.58	27.63	28.56	28.27	26.98	25.82	25.55	30- 40	33.24	500.3	93.6,61.4
50	10.96	11.04	11.02	10.91	10.77	10.67	10.66	10.72	40- 50	12.84	513.2	96,63
60	8.482	8.467	8.405	8.404	8.406	8.352	8.347	8.389	50- 60	8.469	521.6	97.6,64.1
70	6.058	6.121	6.235	6.371	6.393	6.204	6.014	5.981	60- 70	7.359	529.0	99,65
80	2.125	2.238	2.406	2.570	2.595	2.428	2.209	2.078	70- 80	4.585	533.6	99.9,65.5
90	0	0	0	0	0	0	0	0	80- 90	0.7655	534.4	100,65.6
100	0	0	0	0	0	0	0	0	90-100	0	534.4	100,65.6
110	0	0	0	0	0	0	0	0	100-110	0	534.4	100,65.6
120	0	0	0	0	0	0	0	0	110-120	0	534.4	100,65.6
130	0	0	0	0	0	0	0	0	120-130	0	534.4	100,65.6
140	0	0	0	0	0	0	0	0	130-140	0	534.4	100,65.6
150	0	0	0	0	0	0	0	0	140-150	0	534.4	100,65.6
160	0	0	0	0	0	0	0	0	150-160	0	534.4	100,65.6
170	0	0	0	0	0	0	0	0	160-170	0	534.4	100,65.6
180	0	0	0	0	0	0	0	0	170-180	0	534.4	100,65.6
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-11-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1103 15R+DIFFUSER  
DRIVER:9290 028 088 250mA  
30minutes warm-up

### LUMINANCE LIMITATION CURVES

Test:U:220.21V I:0.0488A P:10.326W PF:0.9587 Freq:49.99Hz  
Lamp Flux:814.298x1 lm

NAME: 2218.511-ACOT-97-DW

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2311161338

MFR.: RISE

SUR.: 0.001589625m2

Shielding Angle:

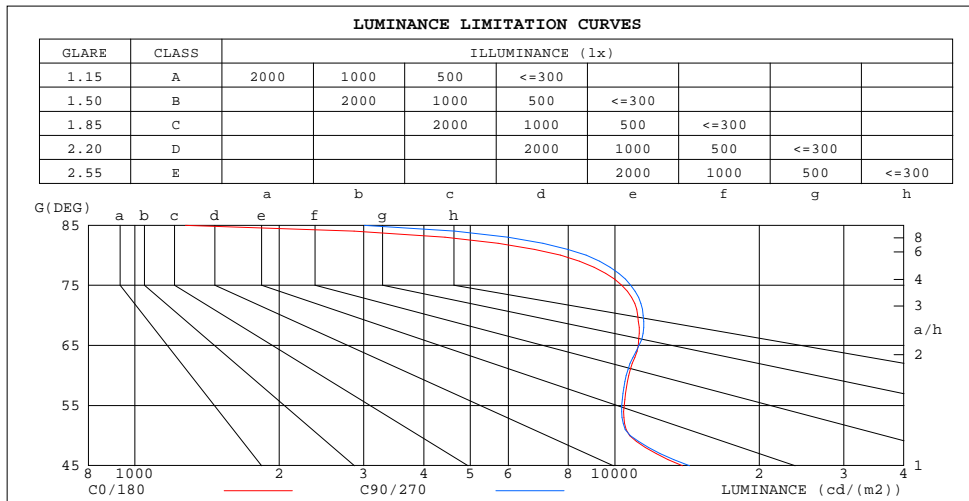

LUMINANCE cd/(m2)		
G(180)	C0/180	C90/270
85	1275	3010
80	7706	8710
75	10339	10796
70	11153	11459
65	11198	11236
60	10682	10565
55	10456	10334
50	10736	10779
45	13835	14301


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-11-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1103 15R+DIFFUSER  
DRIVER:9290 028 088 250mA  
30minutes warm-up

### CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.21V I:0.0488A P:10.326W PF:0.9587 Freq:49.99Hz Lamp Flux:814.298x1 lm		
NAME: 2218.511-ACOT-97-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2311161338
MFR.: RISE	SUR.: 0.001589625m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio                      Coefficients of Utilization(CU)															
0.0	.78	.78	.78	.76	.76	.76	.73	.73	.73	.70	.70	.70	.67	.67	.67	.66
1.0	.73	.72	.71	.72	.71	.70	.69	.68	.67	.67	.66	.65	.65	.64	.64	.62
2.0	.69	.67	.65	.68	.66	.64	.66	.65	.63	.64	.63	.62	.62	.61	.60	.59
3.0	.66	.63	.61	.65	.62	.60	.63	.61	.60	.62	.60	.59	.60	.59	.58	.57
4.0	.63	.60	.58	.62	.59	.57	.61	.58	.57	.59	.58	.56	.58	.57	.55	.54
5.0	.60	.57	.55	.59	.57	.54	.58	.56	.54	.57	.55	.54	.56	.55	.53	.52
6.0	.58	.55	.52	.57	.54	.52	.56	.54	.52	.55	.53	.51	.55	.53	.51	.50
7.0	.55	.52	.50	.55	.52	.50	.54	.52	.50	.54	.51	.50	.53	.51	.49	.49
8.0	.54	.50	.48	.53	.50	.48	.53	.50	.48	.52	.50	.48	.51	.49	.48	.47
9.0	.52	.49	.47	.51	.49	.47	.51	.48	.46	.50	.48	.46	.50	.48	.46	.46
10.0	.50	.47	.45	.50	.47	.45	.49	.47	.45	.49	.47	.45	.48	.46	.45	.44

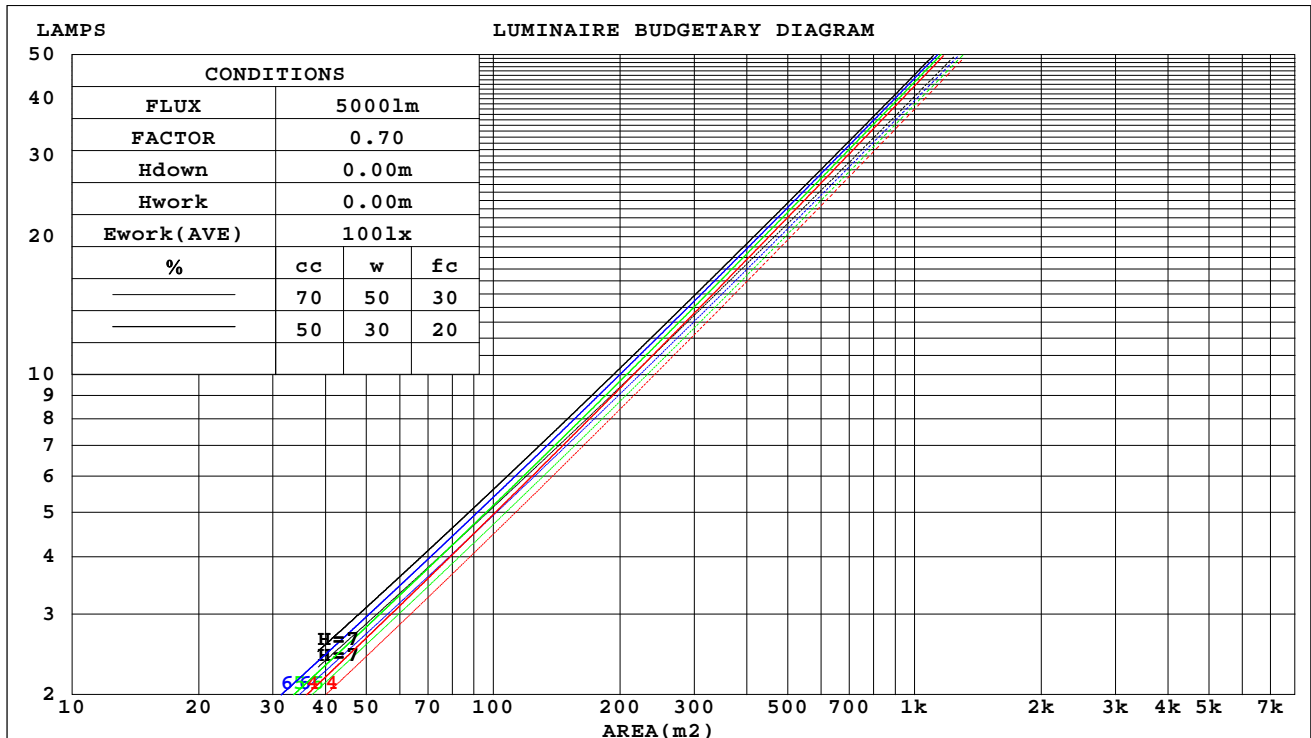

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3℃  
Operators: zoe  
Test Date: 2023-11-16

```

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90
          LENS:PM-1103 15R+DIFFUSER
          DRIVER:9290 028 088 250mA
          30minutes warm-up

```

### WEC AND CCEC

Test:U:220.21V I:0.0488A P:10.326W PF:0.9587 Freq:49.99Hz Lamp Flux:814.298x1 lm		
NAME: 2218.511-ACOT-97-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2311161338
MFR.: RISE	SUR.: 0.001589625m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0	
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
fc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.102	.058	.018	.098	.056	.018	.090	.052	.016	.082	.047	.015	.075	.044	.014		
2.0	.095	.052	.016	.092	.051	.016	.085	.047	.015	.079	.044	.014	.073	.041	.013		
3.0	.089	.047	.014	.086	.046	.014	.080	.043	.013	.075	.041	.013	.070	.039	.012		
4.0	.083	.043	.013	.081	.042	.012	.076	.040	.012	.071	.038	.012	.067	.036	.011		
5.0	.078	.040	.012	.076	.039	.011	.072	.037	.011	.068	.036	.011	.064	.034	.010		
6.0	.074	.037	.011	.072	.036	.010	.068	.035	.010	.065	.034	.010	.062	.033	.010		
7.0	.070	.035	.010	.068	.034	.010	.065	.033	.009	.062	.032	.009	.059	.031	.009		
8.0	.066	.032	.009	.065	.032	.009	.062	.031	.009	.060	.030	.009	.057	.029	.009		
9.0	.063	.031	.009	.062	.030	.008	.060	.029	.008	.057	.029	.008	.055	.028	.008		
10.0	.061	.029	.008	.059	.029	.008	.057	.028	.008	.055	.027	.008	.053	.027	.008		

cc	80%			70%			50%			30%			10%			0	
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
fc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.125	.125	.125	.107	.107	.107	.073	.073	.073	.042	.042	.042	.013	.013	.013		
1.0	.111	.103	.096	.095	.089	.083	.065	.061	.057	.038	.035	.033	.012	.011	.011		
2.0	.100	.087	.076	.086	.075	.066	.059	.052	.046	.034	.030	.027	.011	.010	.009		
3.0	.091	.074	.061	.078	.064	.053	.054	.045	.037	.031	.026	.022	.010	.008	.007		
4.0	.083	.064	.050	.071	.056	.044	.049	.039	.031	.028	.023	.018	.009	.007	.006		
5.0	.077	.057	.042	.066	.049	.036	.045	.034	.026	.026	.020	.015	.008	.007	.005		
6.0	.071	.050	.035	.061	.043	.031	.042	.030	.022	.024	.018	.013	.008	.006	.004		
7.0	.066	.045	.030	.057	.039	.026	.039	.027	.019	.023	.016	.011	.007	.005	.004		
8.0	.062	.041	.026	.053	.035	.023	.037	.025	.016	.021	.015	.010	.007	.005	.003		
9.0	.058	.037	.023	.050	.032	.020	.035	.022	.014	.020	.013	.008	.007	.004	.003		
10.0	.055	.034	.020	.047	.029	.017	.033	.021	.012	.019	.012	.007	.006	.004	.002		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-11-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1103 15R+DIFFUSER  
DRIVER:9290 028 088 250mA  
30minutes warm-up

## UGR(Unified Glare Rating) Table

Test:U:220.21V I:0.0488A P:10.326W PF:0.9587 Freq:49.99Hz Lamp Flux:814.298x1 lm										
NAME: 2218.511-ACOT-97-DW					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2311161338		
MFR.: RISE					SUR.: 0.001589625m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.7	16.4	15.9	16.6	16.8	15.7	16.5	16.0	16.6	16.8
3H	17.0	17.7	17.3	17.9	18.1	17.1	17.8	17.3	18.0	18.2
4H	17.6	18.3	17.9	18.5	18.7	17.7	18.4	18.0	18.6	18.8
6H	18.0	18.6	18.2	18.8	19.1	18.1	18.7	18.4	19.0	19.2
8H	18.0	18.6	18.3	18.9	19.1	18.2	18.8	18.5	19.0	19.3
12H	18.0	18.6	18.3	18.8	19.1	18.2	18.7	18.5	19.0	19.3
4H 2H	16.2	16.8	16.4	17.0	17.3	16.2	16.9	16.5	17.1	17.3
3H	17.8	18.3	18.1	18.6	18.9	17.8	18.4	18.1	18.7	18.9
4H	18.5	19.0	18.8	19.3	19.6	18.5	19.1	18.9	19.4	19.7
6H	18.9	19.4	19.3	19.7	20.0	19.0	19.5	19.4	19.8	20.2
8H	19.0	19.4	19.3	19.7	20.1	19.1	19.6	19.5	19.9	20.3
12H	18.9	19.3	19.3	19.7	20.1	19.1	19.5	19.5	19.9	20.3
8H 4H	18.7	19.1	19.1	19.5	19.9	18.8	19.2	19.2	19.6	19.9
6H	19.2	19.6	19.6	20.0	20.4	19.3	19.7	19.8	20.1	20.5
8H	19.3	19.6	19.8	20.0	20.5	19.5	19.8	19.9	20.2	20.6
12H	19.3	19.6	19.7	20.0	20.5	19.5	19.7	19.9	20.2	20.7
12H 4H	18.7	19.1	19.1	19.5	19.9	18.8	19.2	19.2	19.5	19.9
6H	19.2	19.6	19.7	20.0	20.4	19.3	19.7	19.8	20.1	20.5
8H	19.3	19.6	19.8	20.0	20.5	19.5	19.8	19.9	20.2	20.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.4 / - 0.5					+ 0.5 / - 0.5				
1.5H	+ 0.9 / - 0.5					+ 1.1 / - 0.5				
2.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.3				

CIE Pub.117, 814.3 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.7)  
Area: 0.00158963 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-11-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1103 15R+DIFFUSER  
DRIVER:9290 028 088 250mA  
30minutes warm-up



### UTILIZATION FACTORS TABLE

Test:U:220.21V I:0.0488A P:10.326W PF:0.9587 Freq:49.99Hz Lamp Flux:814.298x1 lm		
NAME: 2218.511-ACOT-97-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2311161338
MFR.: RISE	SUR.: 0.001589625m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	53	51	57	53	51	57	53	51	49
0.80	62	58	56	62	58	56	61	58	56	53
1.00	65	61	59	64	61	59	63	61	58	56
1.25	68	64	62	67	64	62	66	63	61	58
1.50	69	66	64	69	66	64	67	65	63	60
2.00	71	68	66	70	68	66	68	66	65	61
2.50	72	70	68	71	69	67	69	67	66	62
3.00	73	71	69	72	70	68	70	68	67	63
4.00	75	73	71	73	72	70	71	70	69	64
5.00	75	74	73	74	73	72	71	71	70	65
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-11-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1103 15R+DIFFUSER  
DRIVER:9290 028 088 250mA  
30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:220.21V I:0.0488A P:10.326W PF:0.9587 Freq:49.99Hz Lamp Flux:814.298x1 lm		
NAME: 2218.511-ACOT-97-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2311161338
MFR.: RISE	SUR.: 0.001589625m2	Shielding Angle:

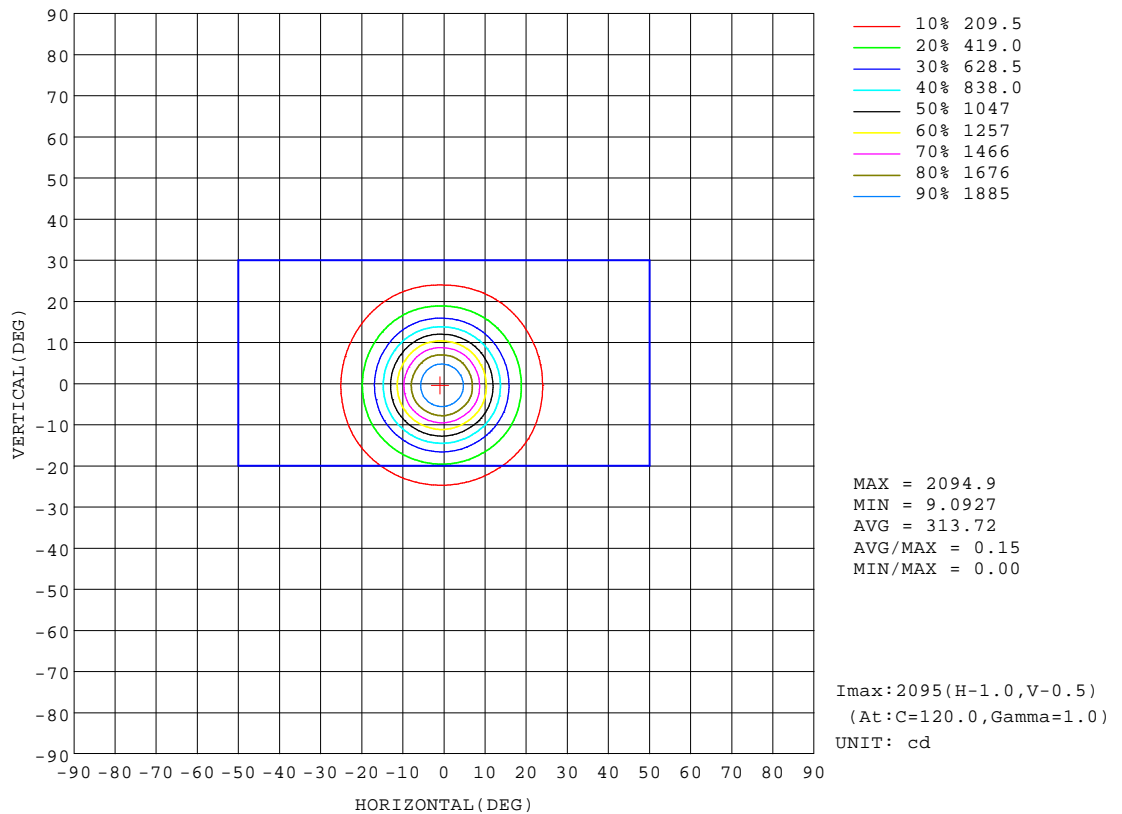


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-11-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXR-V-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1103 15R+DIFFUSER  
DRIVER:9290 028 088 250mA  
30minutes warm-up

## AAI Figure

Test:U:220.21V I:0.0488A P:10.326W PF:0.9587 Freq:49.99Hz Lamp Flux:814.298x1 lm		
NAME: 2218.511-ACOT-97-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2311161338
MFR.: RISE	SUR.: 0.001589625m2	Shielding Angle:

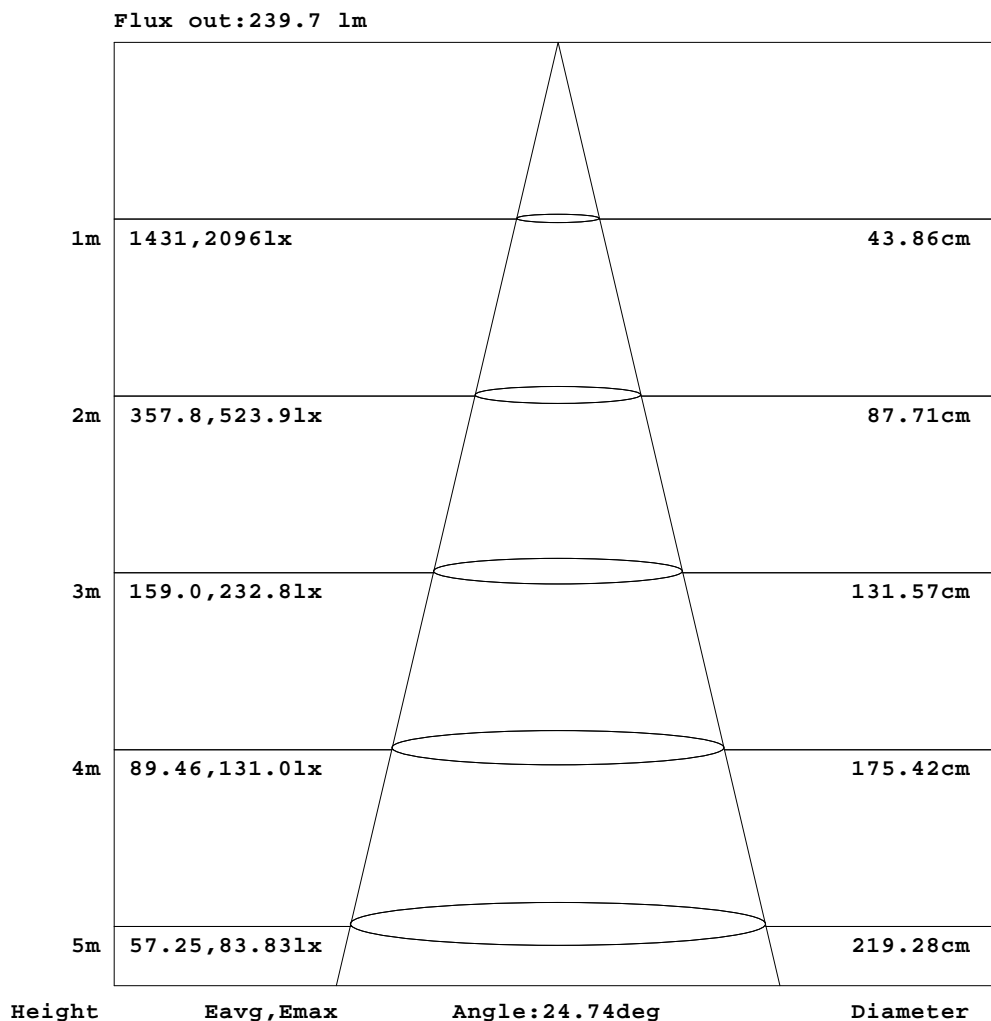


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-11-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1103 15R+DIFFUSER  
DRIVER:9290 028 088 250mA  
30minutes warm-up

## ISOLUX DIAGRAM

Test:U:220.21V I:0.0488A P:10.326W PF:0.9587 Freq:49.99Hz Lamp Flux:814.298x1 lm		
NAME: 2218.511-ACOT-97-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2311161338
MFR.: RISE	SUR.: 0.001589625m2	Shielding Angle:

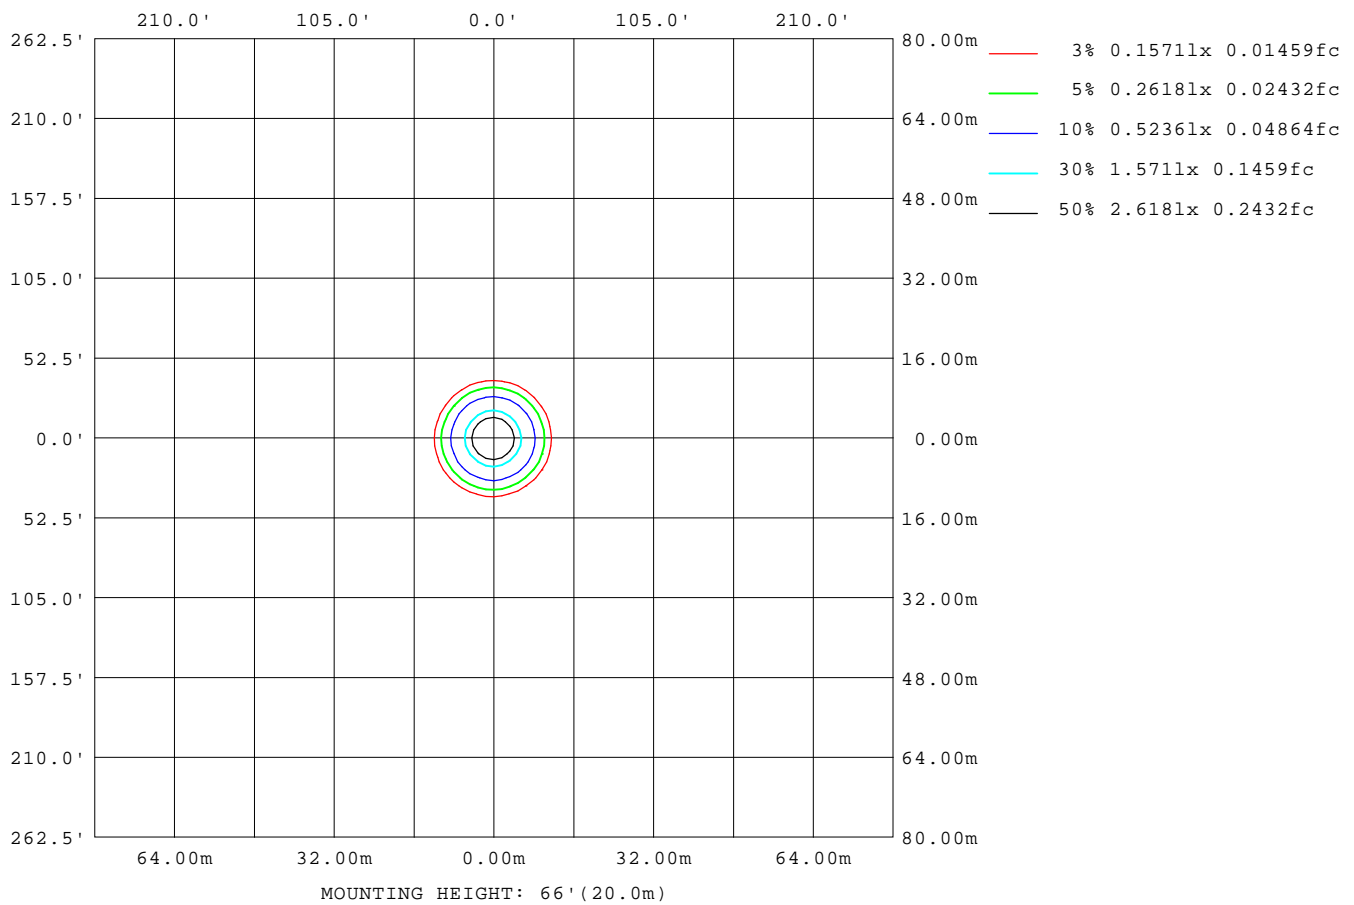

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-11-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXR-V-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1103 15R+DIFFUSER  
DRIVER:9290 028 088 250mA  
30minutes warm-up

## LED Avg.L Report

Test:U:220.21V I:0.0488A P:10.326W PF:0.9587 Freq:49.99Hz Lamp Flux:814.298x1 lm		
NAME: 2218.511-ACOT-97-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2311161338
MFR.: RISE	SUR.: 0.001589625m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	11281
L_0~180(75)av	10790
L_0~180(85)av	2710
L_90~270(65)av	11149
L_90~270(75)av	10589
L_90~270(85)av	2508
L_45(65)av	11191
L_45(75)av	10684
L_45(85)av	2604

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-11-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1103 15R+DIFFUSER  
DRIVER:9290 028 088 250mA  
30minutes warm-up

## Planar Illuminance Curve

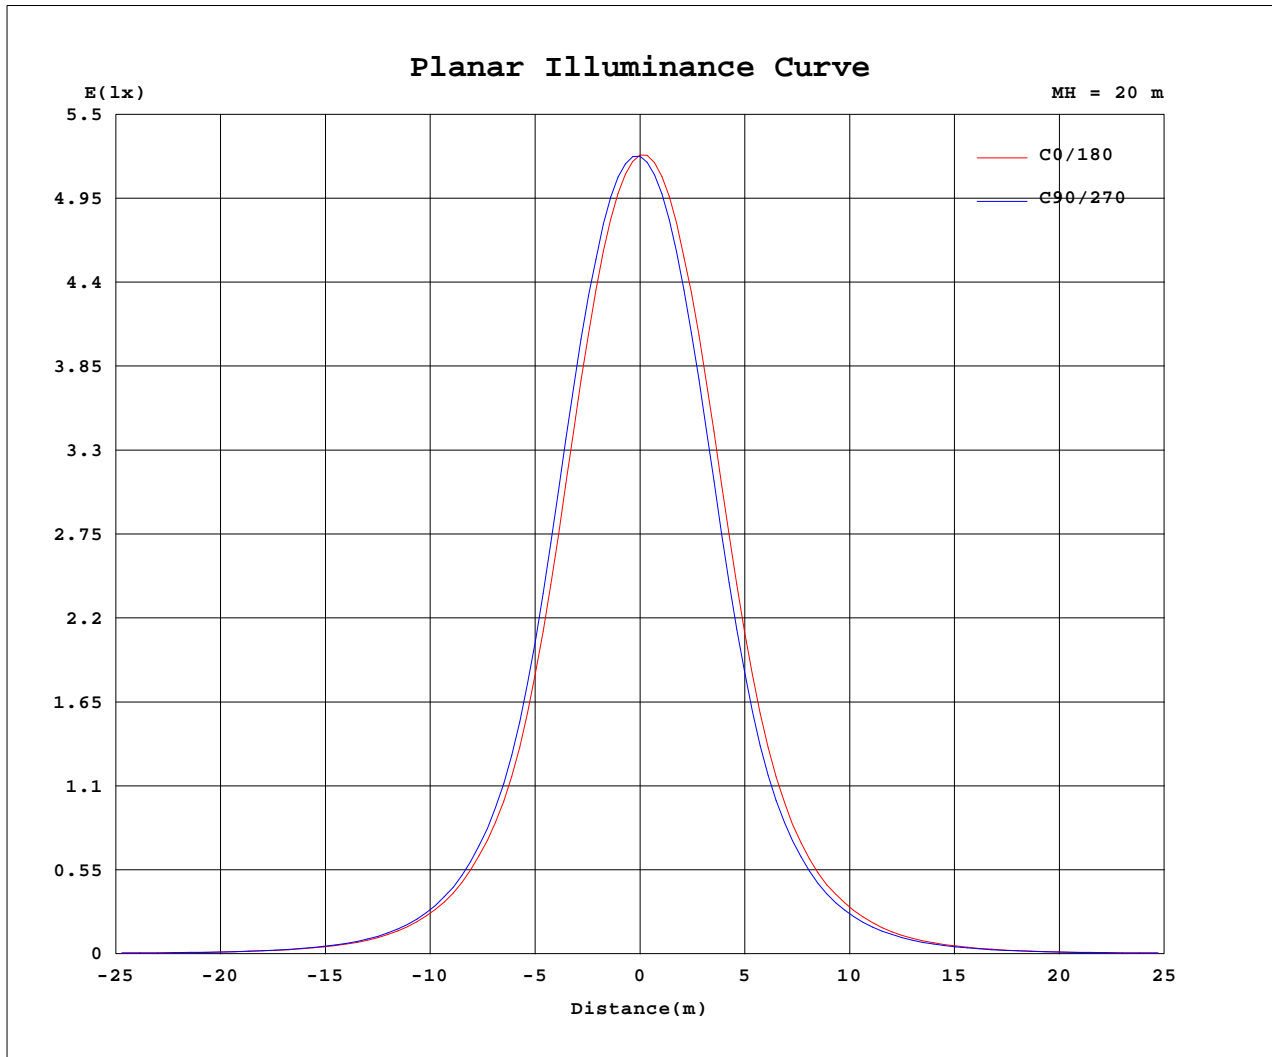

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators: zoe  
 Test Date: 2023-11-16

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: BXRV-DR-1830G-0600-B-23 Ra: 90  
 LENS: PM-1103 15R+DIFFUSER  
 DRIVER: 9290 028 088 250mA  
 30minutes warm-up



## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.21V I:0.0488A P:10.326W PF:0.9587 Freq:49.99Hz Lamp Flux:814.298x1 lm		
NAME: 2218.511-ACOT-97-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2311161338
MFR.: RISE	SUR.: 0.001589625m2	Shielding Angle:

Table--1

UNIT: cd

C(DEC) (DEC)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2092	2092	2092	2092	2092	2092	2092	2092	2092	2092	2092	2092						
5	1861	1886	1908	1936	1950	1953	1936	1908	1887	1862	1844	1841						
10	1290	1340	1364	1414	1438	1457	1432	1381	1354	1298	1275	1261						
15	699	733	749	787	816	830	812	773	750	706	687	677						
20	359	377	381	397	410	420	410	391	380	358	351	348						
25	183	191	192	203	209	216	211	197	192	181	179	177						
30	93.7	96.7	96.3	101	106	110	107	100	96.8	92.4	91.7	90.6						
35	47.6	48.7	48.9	51.3	53.4	54.9	53.8	51.3	49.5	47.6	47.1	46.6						
40	26.0	26.6	26.6	27.6	28.4	28.8	28.3	27.3	26.6	25.8	25.7	25.4						
45	15.5	15.9	15.8	16.1	16.2	16.2	16.0	15.7	15.5	15.1	15.2	15.2						
50	11.0	11.1	11.0	11.0	10.9	10.9	10.8	10.7	10.7	10.7	10.7	10.7						
55	9.52	9.56	9.45	9.43	9.39	9.36	9.34	9.31	9.30	9.36	9.40	9.42						
60	8.48	8.52	8.42	8.40	8.40	8.41	8.41	8.37	8.34	8.35	8.37	8.41						
65	7.52	7.56	7.53	7.56	7.58	7.62	7.64	7.56	7.48	7.42	7.41	7.42						
70	6.06	6.11	6.13	6.24	6.33	6.42	6.39	6.27	6.14	6.01	5.97	5.99						
75	4.25	4.32	4.34	4.45	4.55	4.65	4.63	4.51	4.41	4.27	4.20	4.18						
80	2.13	2.21	2.26	2.41	2.52	2.62	2.60	2.48	2.38	2.21	2.10	2.05						
85	0.18	0.23	0.29	0.42	0.52	0.61	0.57	0.49	0.41	0.28	0.19	0.15						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-11-16

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1103 15R+DIFFUSER  
DRIVER:9290 028 088 250mA  
30minutes warm-up