

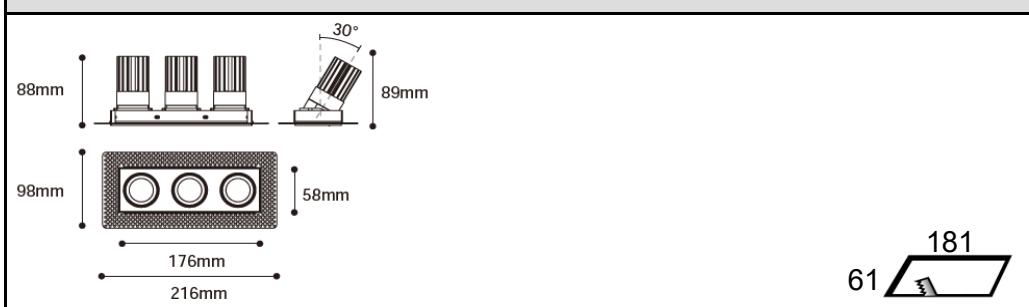


STARLUX-FLAT-3-STLA2



Product specification

INTERIOR COMBO LIGHTS

181
61

Technical Specification


Article number	2314.400-3-ACOT-97		
LED Consumption	10W X3		
Fixture Consumption	-		
Current / Voltage	250mA / 36.5Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen *1	871lm X3	913lm X3	981lm X3
Delivered Lumen	-	-	-
Beam Angle available	15°/24°/36°/50° (Lens)		

Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character	Materials
Products Standard	IEC 60598-1
	IEC 62031
Insulation	CLASS III
Protection	IP44
Tilt / Rotate	0~30° / 0~355°
Operating temperature	0~35°C
Average Failure Time	Baffle Color available
	white / black

Accessories

ACHO-18
honeycomb louver
+PC sheetSG-002
Striped Glass

Photometric

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.