


Luminaire Photograph

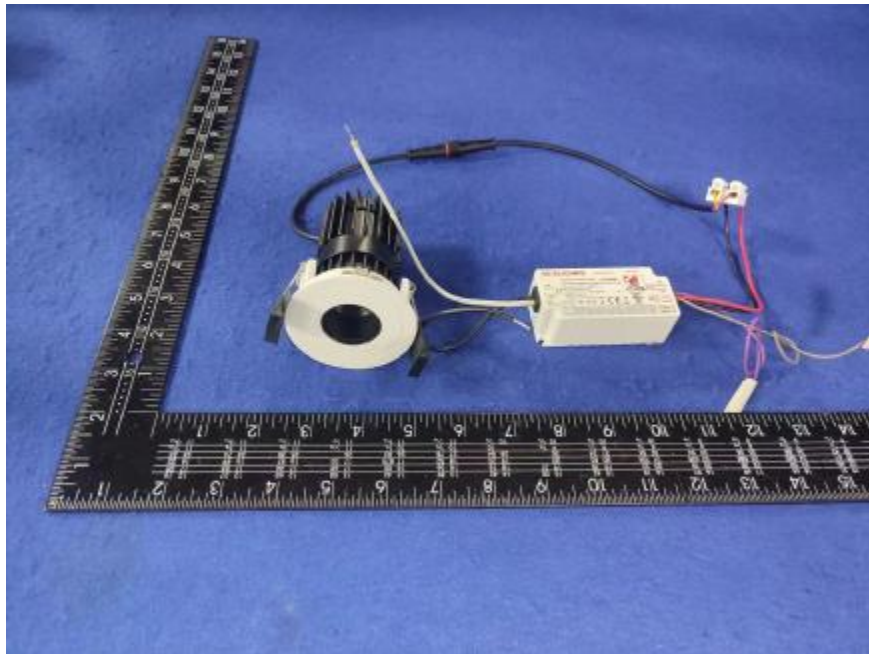

Light Output Ratio:	50.0%	
Luminaire Power:	12.08 W	
SHR Nominal:	0.50	Calculated using the TM5
SHR Maximum:	0.55	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2024-7-1

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra:90
LENS: PM-1084B 36R
DRIVER: PUP10A-1WMC-350 260mA
30minutes warm-up

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

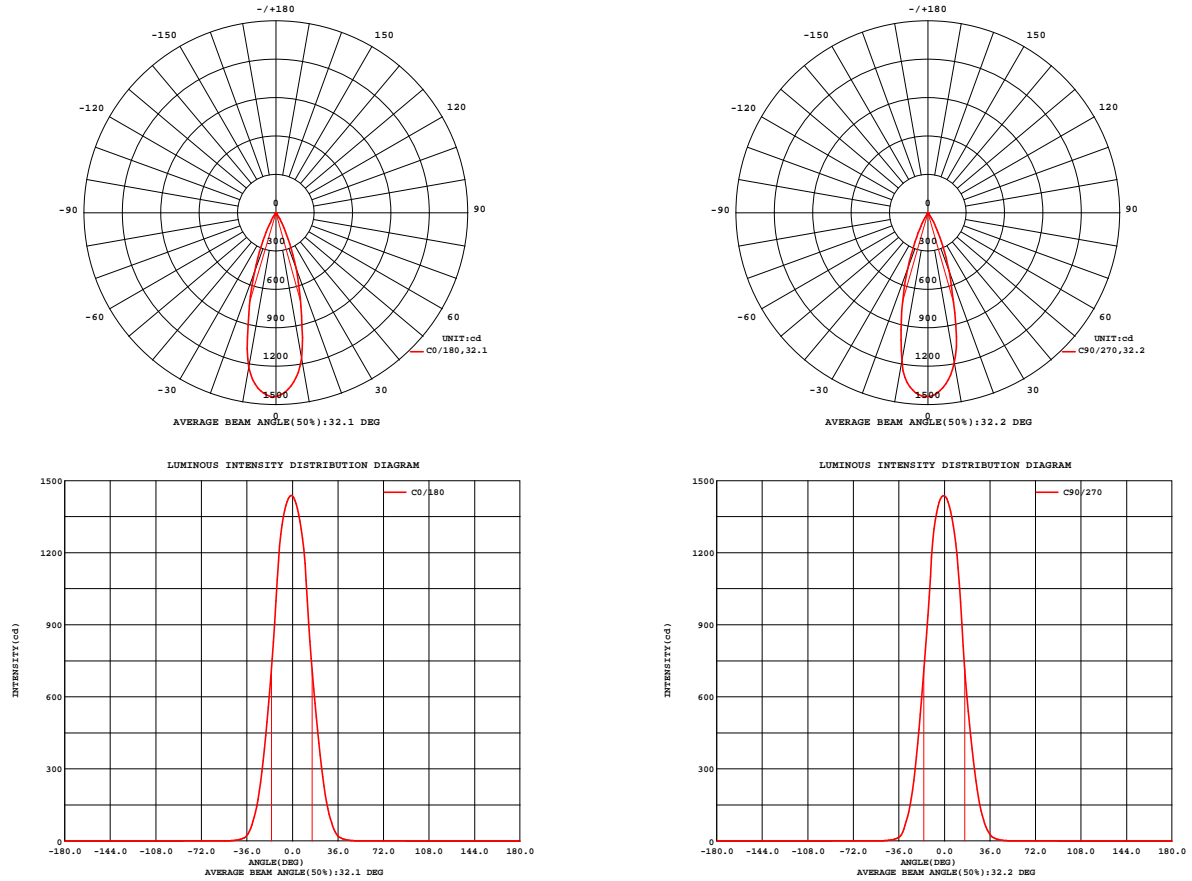


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2024-7-1

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra: 90
LENS: PM-1084B 36R
DRIVER: PUP10A-1WMC-350 260mA
30minutes warm-up

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.09V I:0.1015A P:12.078W PF:0.9895 Freq:59.98Hz Lamp Flux:963.24lx1 lm		
NAME: 2318.120-LEA-13	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2407010720
MFR.: RISE	SUR.: 0.0007065m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 39.86 lm/W			
MODEL	CREE	I _{max} (cd)	1440	S/MH(C0/180)	0.54
NOMINAL POWER(W)	12	LOR(%)	50.0	S/MH(C90/270)	0.53
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	481.44	UP,DN(C0-180)	0.0,25.0
NOMINAL FLUX(lm)	963.241	CIE CLASS	DIRECT	UP,DN(C180-360)	0.0,24.9
LAMPS INSIDE	1	up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120	down(%)	50.0	CIBSE SHR MAX	0.55

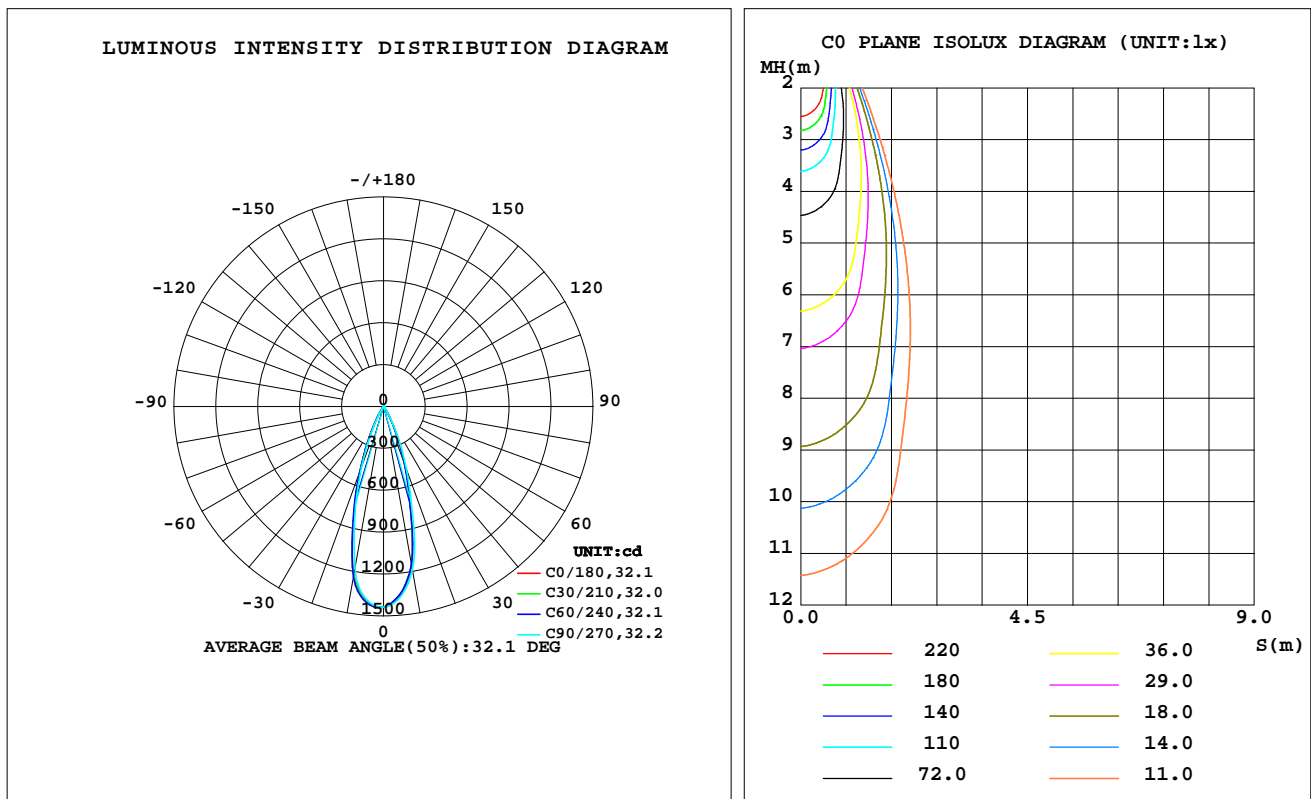

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-7-1

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1084B 36R
DRIVER:PUP10A-1WMC-350 260mA
30minutes warm-up

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

	C0	C45	C90	C135	C180	C225	C270	C315		zone	total	%lum,lamp
10	1156	1151	1189	1212	1227	1237	1180	1157	0- 10	125.8	125.8	26.1,13.1
20	461.5	445.8	483.9	493.4	496.1	503.5	464.1	453.4	10- 20	219.3	345.1	71.7,35.8
30	92.26	92.33	105.4	107.4	99.88	95.50	81.69	84.44	20- 30	110.8	456.0	94.7,47.3
40	9.316	9.975	11.21	10.84	8.733	7.991	6.658	7.422	30- 40	22.29	478.2	99.3,49.6
50	0.8810	0.9946	1.207	1.221	1.035	0.9216	0.7847	0.7917	40- 50	2.723	481.0	99.9,49.9
60	0.1359	0.1371	0.1571	0.1554	0.1476	0.1471	0.1348	0.1268	50- 60	0.3516	481.3	100,50
70	0.0460	0.0438	0.0524	0.0516	0.0530	0.0471	0.0438	0.0378	60- 70	0.0840	481.4	100,50
80	0.0158	0.0126	0.0183	0.0136	0.0186	0.0113	0.0149	0.0122	70- 80	0.0287	481.4	100,50
90	0	0	0	0	0	0	0	0	80- 90	0.0039	481.4	100,50
100	0	0	0	0	0	0	0	0	90-100	0	481.4	100,50
110	0	0	0	0	0	0	0	0	100-110	0	481.4	100,50
120	0	0	0	0	0	0	0	0	110-120	0	481.4	100,50
130	0	0	0	0	0	0	0	0	120-130	0	481.4	100,50
140	0	0	0	0	0	0	0	0	130-140	0	481.4	100,50
150	0	0	0	0	0	0	0	0	140-150	0	481.4	100,50
160	0	0	0	0	0	0	0	0	150-160	0	481.4	100,50
170	0	0	0	0	0	0	0	0	160-170	0	481.4	100,50
180	0	0	0	0	0	0	0	0	170-180	0	481.4	100,50
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-7-1

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1084B 36R
DRIVER:PUP10A-1WMC-350 260mA
30minutes warm-up

LUMINANCE LIMITATION CURVES

Test:U:120.09V I:0.1015A P:12.078W PF:0.9895 Freq:59.98Hz
Lamp Flux:963.24lx1 lm

NAME: 2318.120-LEA-13

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2407010720

MFR.: RISE

SUR.: 0.0007065m2

Shielding Angle:

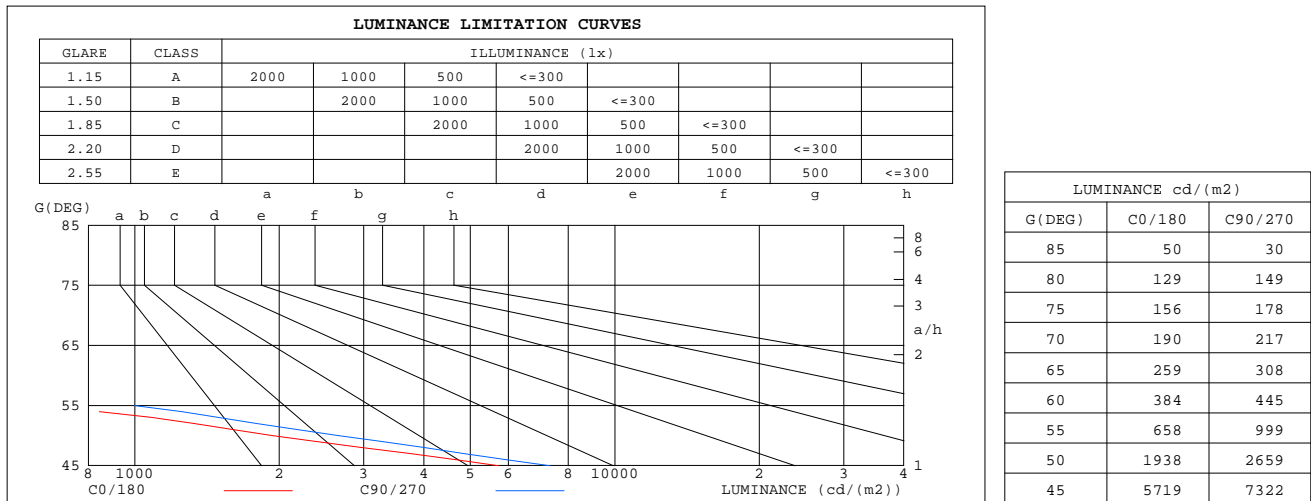


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-7-1

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1084B 36R
DRIVER:PUP10A-1WMC-350 260mA
30minutes warm-up

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.09V I:0.1015A P:12.078W PF:0.9895 Freq:59.98Hz Lamp Flux:963.24lx1 lm		
NAME: 2318.120-LEA-13	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2407010720
MFR.: RISE	SUR.: 0.0007065m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

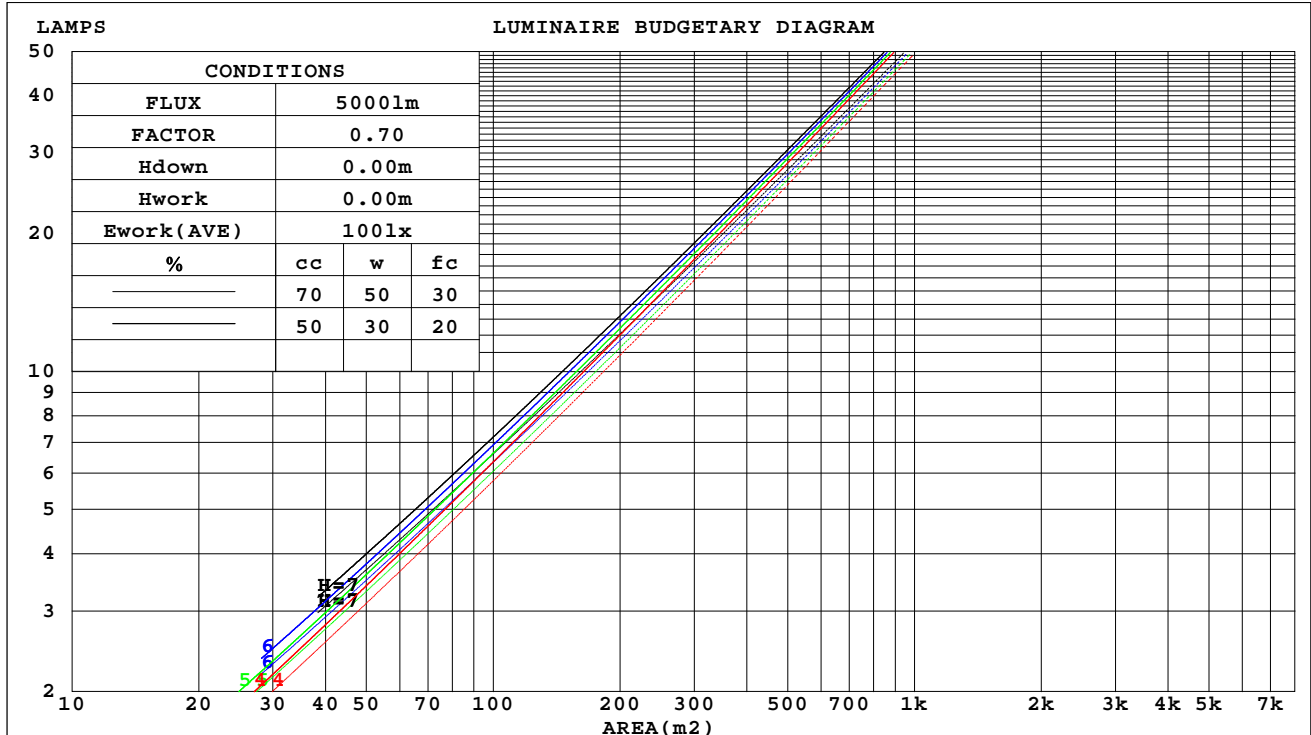

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-7-1

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1084B 36R
DRIVER:PUP10A-1WMC-350 260mA
30minutes warm-up



WEC AND CCEC

Test:U:120.09V I:0.1015A P:12.078W PF:0.9895 Freq:59.98Hz Lamp Flux:963.24lx1 lm		
NAME: 2318.120-LEA-13	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2407010720
MFR.: RISE	SUR.: 0.0007065m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.072	.041	.013	.069	.039	.012	.062	.036	.011	.057	.033	.010	.051	.030	.010	
2.0	.067	.037	.011	.064	.035	.011	.059	.033	.010	.054	.031	.010	.050	.028	.009	
3.0	.063	.033	.010	.061	.032	.010	.056	.031	.009	.052	.029	.009	.049	.027	.008	
4.0	.059	.031	.009	.057	.030	.009	.054	.028	.009	.050	.027	.008	.047	.026	.008	
5.0	.056	.029	.008	.054	.028	.008	.051	.027	.008	.048	.026	.008	.046	.024	.007	
6.0	.053	.027	.008	.052	.026	.008	.049	.025	.007	.047	.024	.007	.044	.023	.007	
7.0	.051	.025	.007	.050	.025	.007	.047	.024	.007	.045	.023	.007	.043	.022	.007	
8.0	.049	.024	.007	.048	.023	.007	.046	.023	.006	.044	.022	.006	.042	.021	.006	
9.0	.047	.023	.006	.046	.022	.006	.044	.022	.006	.042	.021	.006	.040	.021	.006	
10.0	.045	.022	.006	.044	.021	.006	.042	.021	.006	.041	.020	.006	.039	.020	.006	

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.095	.095	.095	.081	.081	.081	.056	.056	.056	.032	.032	.032	.010	.010	.010	
1.0	.084	.079	.074	.072	.068	.063	.049	.047	.044	.028	.027	.026	.009	.009	.008	
2.0	.076	.066	.059	.065	.057	.051	.044	.039	.035	.026	.023	.021	.008	.007	.007	
3.0	.068	.057	.047	.059	.049	.041	.040	.034	.029	.023	.020	.017	.007	.006	.006	
4.0	.062	.049	.039	.053	.042	.034	.037	.030	.024	.021	.017	.014	.007	.006	.005	
5.0	.057	.043	.032	.049	.037	.028	.034	.026	.020	.020	.015	.012	.006	.005	.004	
6.0	.053	.038	.027	.046	.033	.024	.031	.023	.017	.018	.014	.010	.006	.004	.003	
7.0	.049	.034	.023	.042	.029	.020	.029	.021	.014	.017	.012	.009	.006	.004	.003	
8.0	.046	.031	.020	.040	.027	.017	.028	.019	.012	.016	.011	.007	.005	.004	.002	
9.0	.044	.028	.017	.038	.024	.015	.026	.017	.011	.015	.010	.006	.005	.003	.002	
10.0	.041	.026	.015	.035	.022	.013	.025	.016	.009	.014	.009	.006	.005	.003	.002	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-7-1

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1084B 36R
DRIVER:PUP10A-1WMC-350 260mA
30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:120.09V I:0.1015A P:12.078W PF:0.9895 Freq:59.98Hz Lamp Flux:963.24lx1 lm										
NAME: 2318.120-LEA-13					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2407010720		
MFR.: RISE					SUR.: 0.0007065m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.4	13.2	12.7	13.3	13.5	13.0	13.7	13.2	13.9	14.0
3H	12.3	12.9	12.5	13.1	13.3	12.8	13.5	13.1	13.7	13.9
4H	12.2	12.8	12.5	13.0	13.3	12.8	13.4	13.0	13.6	13.8
6H	12.1	12.7	12.4	12.9	13.2	12.7	13.3	13.0	13.5	13.7
8H	12.1	12.6	12.4	12.9	13.1	12.6	13.2	12.9	13.4	13.7
12H	12.0	12.6	12.3	12.8	13.1	12.6	13.1	12.9	13.4	13.7
4H 2H	12.2	12.8	12.5	13.0	13.3	12.8	13.4	13.0	13.6	13.8
3H	12.0	12.6	12.3	12.8	13.1	12.6	13.1	12.9	13.4	13.7
4H	11.9	12.4	12.3	12.7	13.0	12.5	13.0	12.8	13.3	13.6
6H	11.8	12.3	12.2	12.6	13.0	12.4	12.8	12.8	13.2	13.5
8H	11.8	12.2	12.2	12.5	12.9	12.3	12.8	12.7	13.1	13.5
12H	11.7	12.1	12.1	12.5	12.9	12.3	12.7	12.7	13.0	13.4
8H 4H	11.8	12.2	12.2	12.5	12.9	12.3	12.8	12.7	13.1	13.5
6H	11.7	12.0	12.1	12.4	12.8	12.2	12.6	12.7	13.0	13.4
8H	11.6	11.9	12.1	12.3	12.8	12.2	12.5	12.6	12.9	13.3
12H	11.6	11.8	12.0	12.3	12.7	12.1	12.4	12.6	12.8	13.3
12H 4H	11.7	12.1	12.1	12.5	12.9	12.3	12.7	12.7	13.0	13.4
6H	11.6	11.9	12.1	12.3	12.8	12.2	12.5	12.6	12.9	13.3
8H	11.6	11.8	12.0	12.3	12.7	12.1	12.4	12.6	12.8	13.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.8 / -18.4					+ 4.7 / -18.7				
1.5H	+ 6.4 / -16.2					+ 7.3 / -16.9				
2.0H	+ 7.1 / -10.4					+ 7.9 / -10.7				

CIE Pub.117, 963.2 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.1)
Area: 0.0007065 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-7-1

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1084B 36R
DRIVER:PUP10A-1WMC-350 260mA
30minutes warm-up

UTILIZATION FACTORS TABLE

Test:U:120.09V I:0.1015A P:12.078W PF:0.9895 Freq:59.98Hz Lamp Flux:963.24lx1 lm		
NAME: 2318.120-LEA-13	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2407010720
MFR.: RISE	SUR.: 0.0007065m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	46	43	41	45	43	41	45	42	41	39
0.80	49	46	45	49	46	45	48	46	45	43
1.00	51	48	47	50	48	47	50	48	46	45
1.25	53	50	49	52	50	49	51	49	48	46
1.50	54	52	50	53	51	50	52	51	49	47
2.00	55	53	52	54	53	51	53	52	50	48
2.50	56	54	53	55	53	52	53	52	51	48
3.00	56	55	54	55	54	53	54	53	52	49
4.00	57	56	55	56	55	54	54	54	53	50
5.00	58	57	56	57	56	55	55	54	54	50
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-7-1

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1084B 36R
DRIVER:PUP10A-1WMC-350 260mA
30minutes warm-up

ISOCANDELA DIAGRAM

Test:U:120.09V I:0.1015A P:12.078W PF:0.9895 Freq:59.98Hz Lamp Flux:963.24lx1 lm		
NAME: 2318.120-LEA-13	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2407010720
MFR.: RISE	SUR.: 0.0007065m2	Shielding Angle:

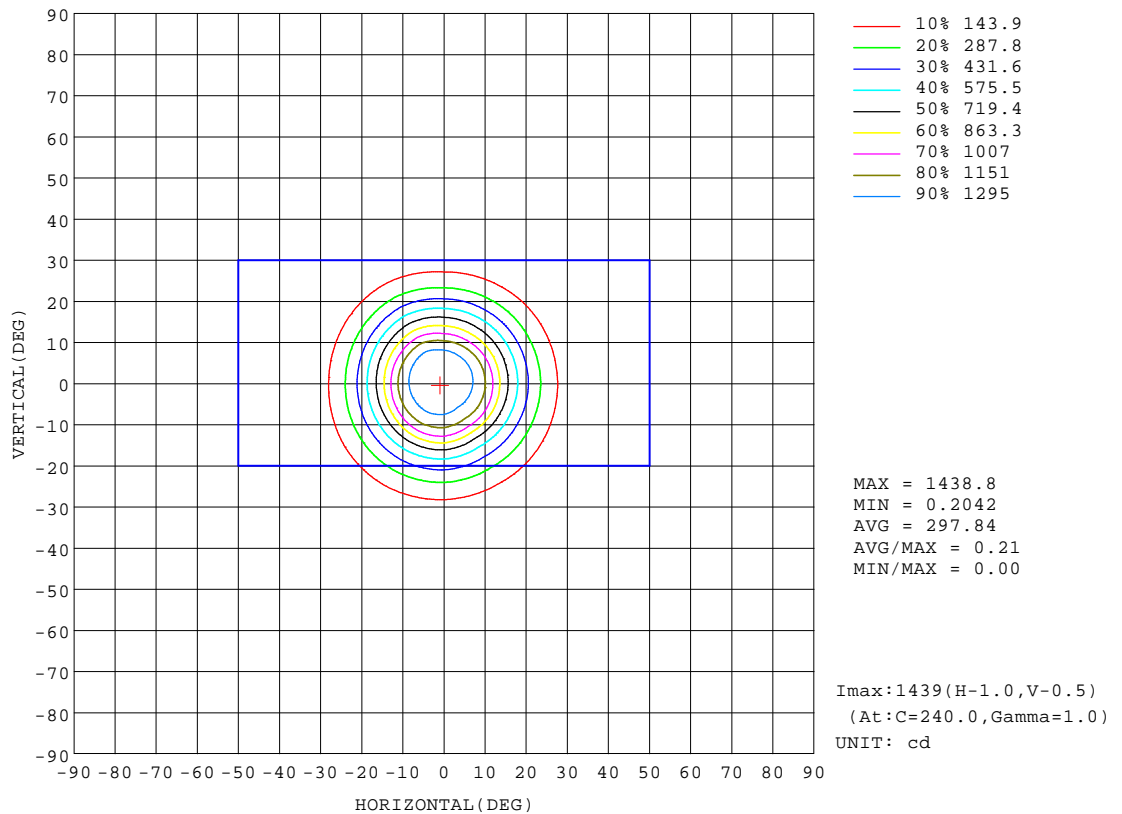


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-7-1

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1084B 36R
DRIVER:PUP10A-1WMC-350 260mA
30minutes warm-up

AAI Figure

Test:U:120.09V I:0.1015A P:12.078W PF:0.9895 Freq:59.98Hz Lamp Flux:963.24lx1 lm		
NAME: 2318.120-LEA-13	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2407010720
MFR.: RISE	SUR.: 0.0007065m2	Shielding Angle:

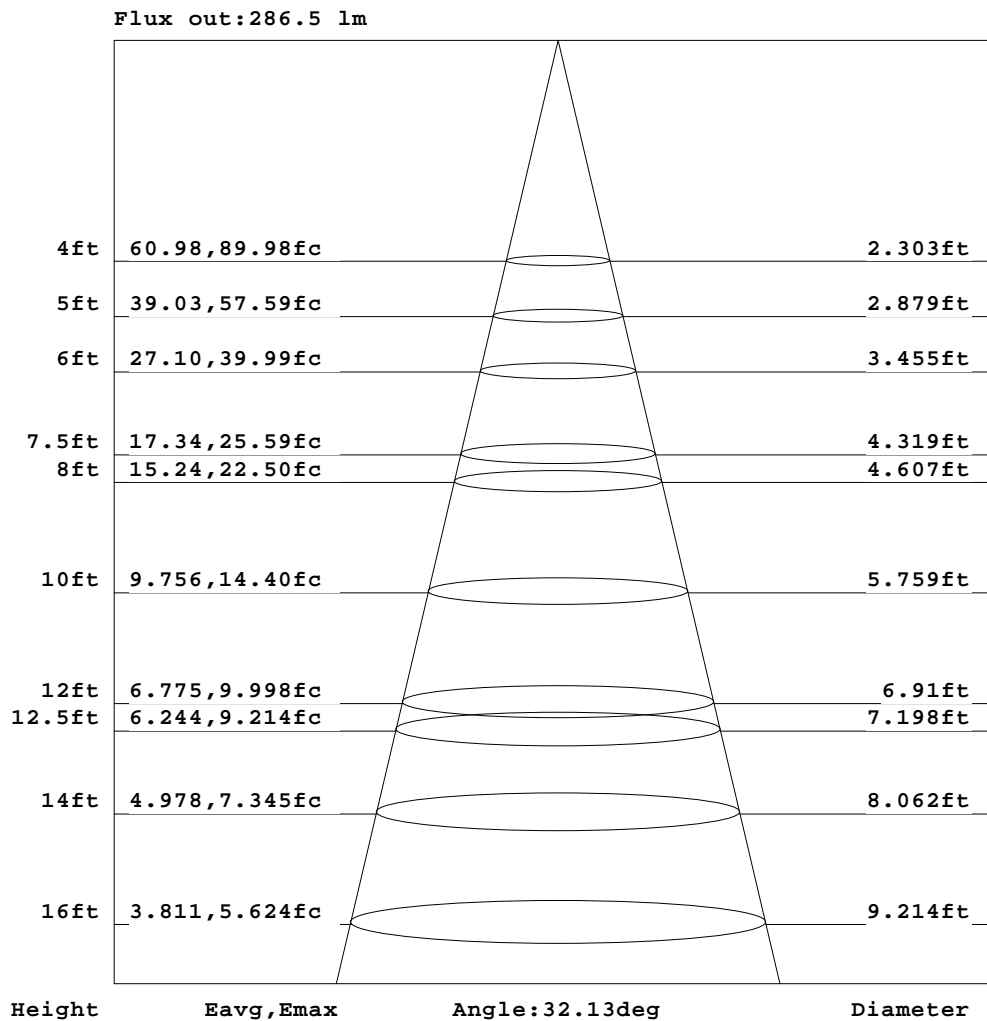


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-7-1

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1084B 36R
DRIVER:PUP10A-1WMC-350 260mA
30minutes warm-up

ISOLUX DIAGRAM

Test:U:120.09V I:0.1015A P:12.078W PF:0.9895 Freq:59.98Hz Lamp Flux:963.24lx1 lm		
NAME: 2318.120-LEA-13	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2407010720
MFR.: RISE	SUR.: 0.0007065m2	Shielding Angle:

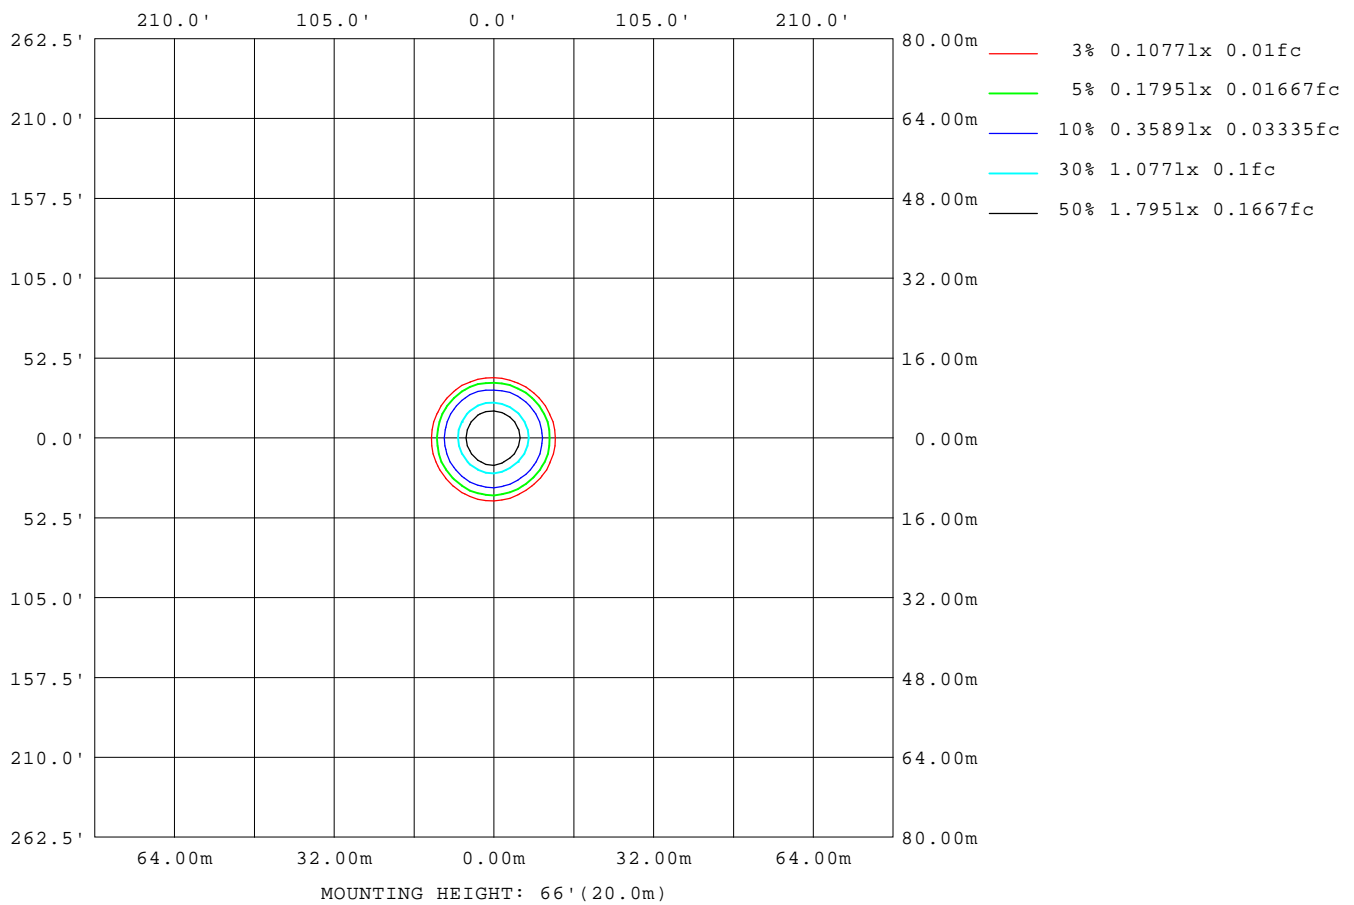

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2024-7-1

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra:90
LENS: PM-1084B 36R
DRIVER: PUP10A-1WMC-350 260mA
30minutes warm-up

LED Avg.L Report

Test:U:120.09V I:0.1015A P:12.078W PF:0.9895 Freq:59.98Hz Lamp Flux:963.24lx1 lm		
NAME: 2318.120-LEA-13	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2407010720
MFR.: RISE	SUR.: 0.0007065m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	273
L_0~180(75)av	161
L_0~180(85)av	30
L_90~270(65)av	280
L_90~270(75)av	158
L_90~270(85)av	38
L_45(65)av	265
L_45(75)av	135
L_45(85)av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-7-1

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1084B 36R
DRIVER:PUP10A-1WMC-350 260mA
30minutes warm-up

Planar Illuminance Curve

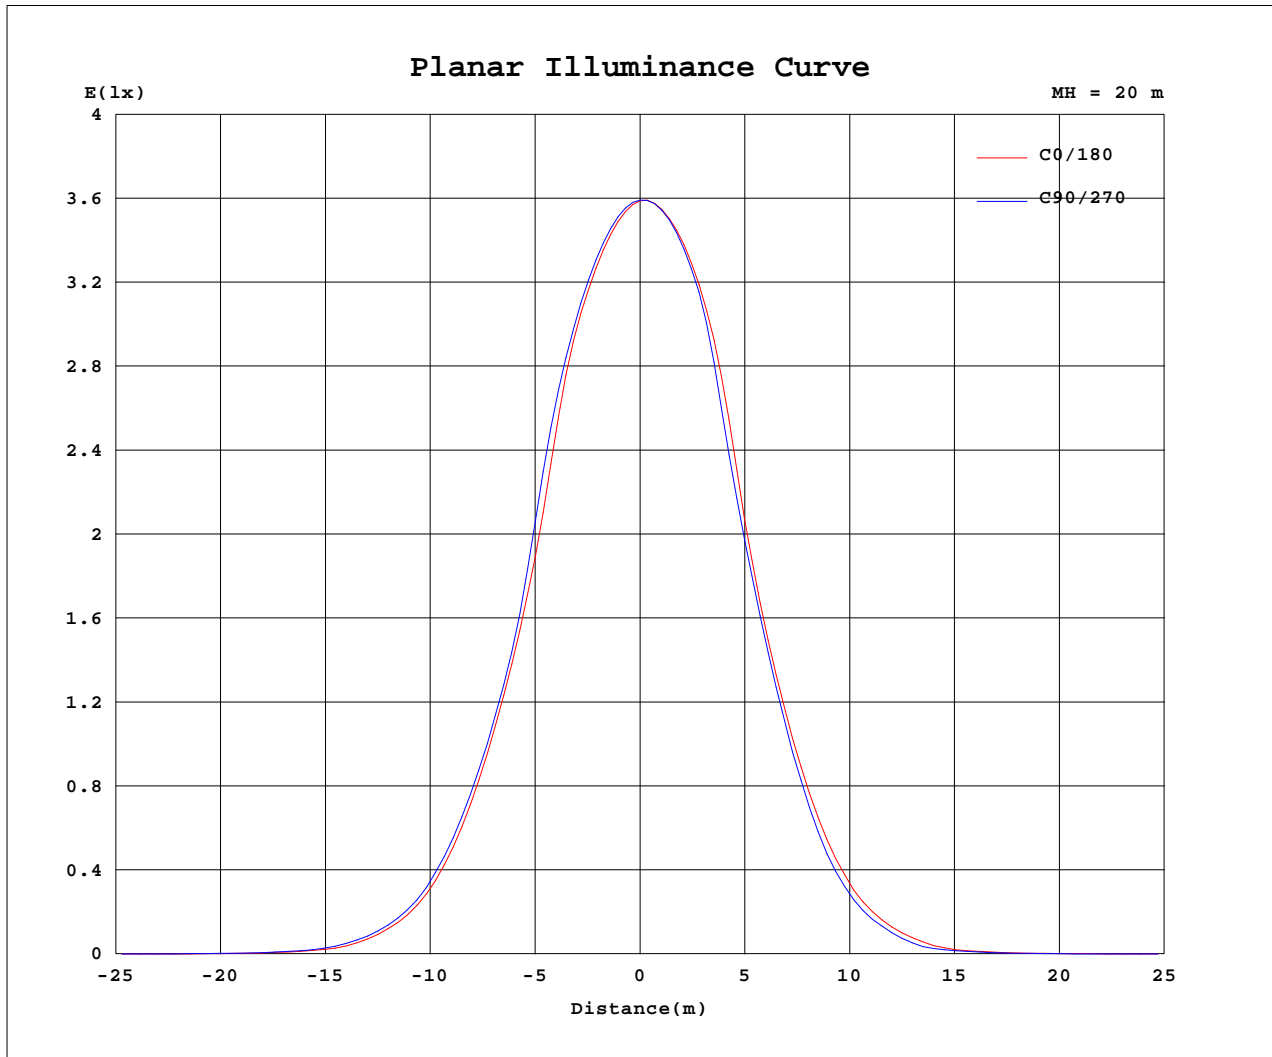

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: zoe
 Test Date: 2024-7-1

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra:90
 LENS: PM-1084B 36R
 DRIVER: PUP10A-1WMC-350 260mA
 30minutes warm-up



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.09V I:0.1015A P:12.078W PF:0.9895 Freq:59.98Hz Lamp Flux:963.24lx1 lm		
NAME: 2318.120-LEA-13	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2407010720
MFR.: RISE	SUR.: 0.0007065m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1437	1437	1437	1437	1437	1437	1437	1437	1437	1437	1437	1437						
5	1358	1351	1350	1370	1380	1387	1396	1404	1410	1390	1376	1366						
10	1156	1153	1150	1189	1209	1214	1227	1234	1240	1180	1157	1156						
15	761	747	742	812	831	821	828	837	849	794	771	763						
20	461	448	444	484	495	492	496	499	508	464	453	454						
25	228	224	221	249	255	250	245	242	242	212	214	217						
30	92.3	92.4	92.3	105	109	106	99.9	96.8	94.2	81.7	81.2	87.7						
35	28.0	30.7	30.8	37.4	38.8	35.2	29.8	26.1	23.5	18.9	21.4	23.3						
40	9.32	10.1	9.89	11.2	11.4	10.3	8.73	8.32	7.66	6.66	6.91	7.94						
45	2.86	3.26	3.21	3.66	3.73	3.38	2.96	2.69	2.48	2.17	2.24	2.49						
50	0.88	1.01	0.97	1.21	1.25	1.19	1.04	0.94	0.90	0.78	0.77	0.82						
55	0.27	0.27	0.29	0.40	0.43	0.39	0.32	0.30	0.29	0.25	0.24	0.24						
60	0.14	0.13	0.14	0.16	0.16	0.15	0.15	0.15	0.15	0.13	0.13	0.13						
65	0.08	0.08	0.08	0.09	0.09	0.08	0.09	0.08	0.08	0.08	0.07	0.07						
70	0.05	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.04						
75	0.03	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.03	0.02	0.02						
80	0.02	0.01	0.01	0.02	0.01	0.01	0.02	0.01	0.01	0.01	0.01	0.01						
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-7-1

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1084B 36R
DRIVER:PUP10A-1WMC-350 260mA
30minutes warm-up