


Luminaire Photograph

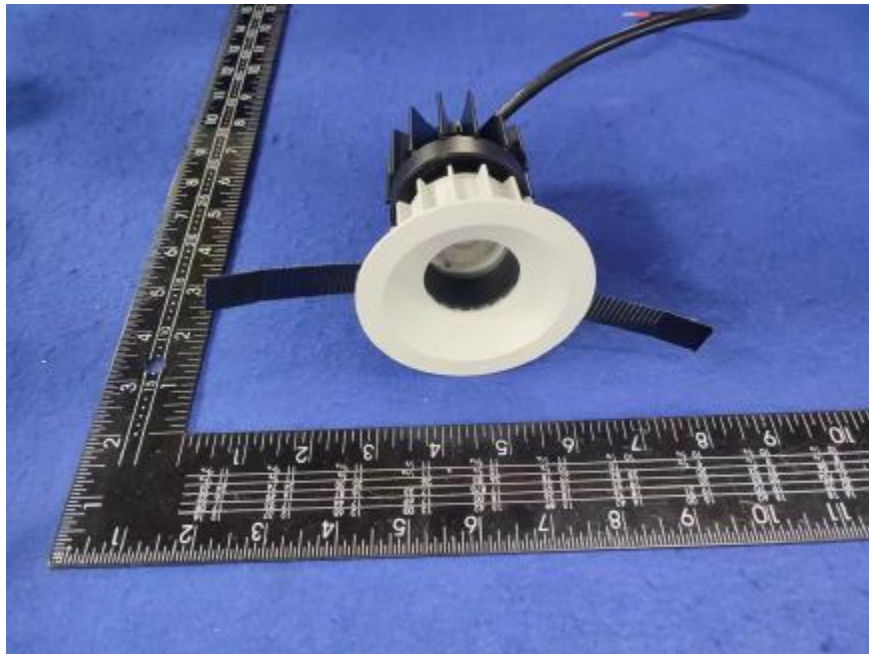

Light Output Ratio:	69.5%	
Luminaire Power:	10.16 W	
SHR Nominal:	0.75	Calculated using the TM5
SHR Maximum:	0.85	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2024-5-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRE-30G10TH-A-83 Ra:90
LENS: PM-1082C-WH 50R
NO DRIVER: 300mA
30minutes warm-up

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

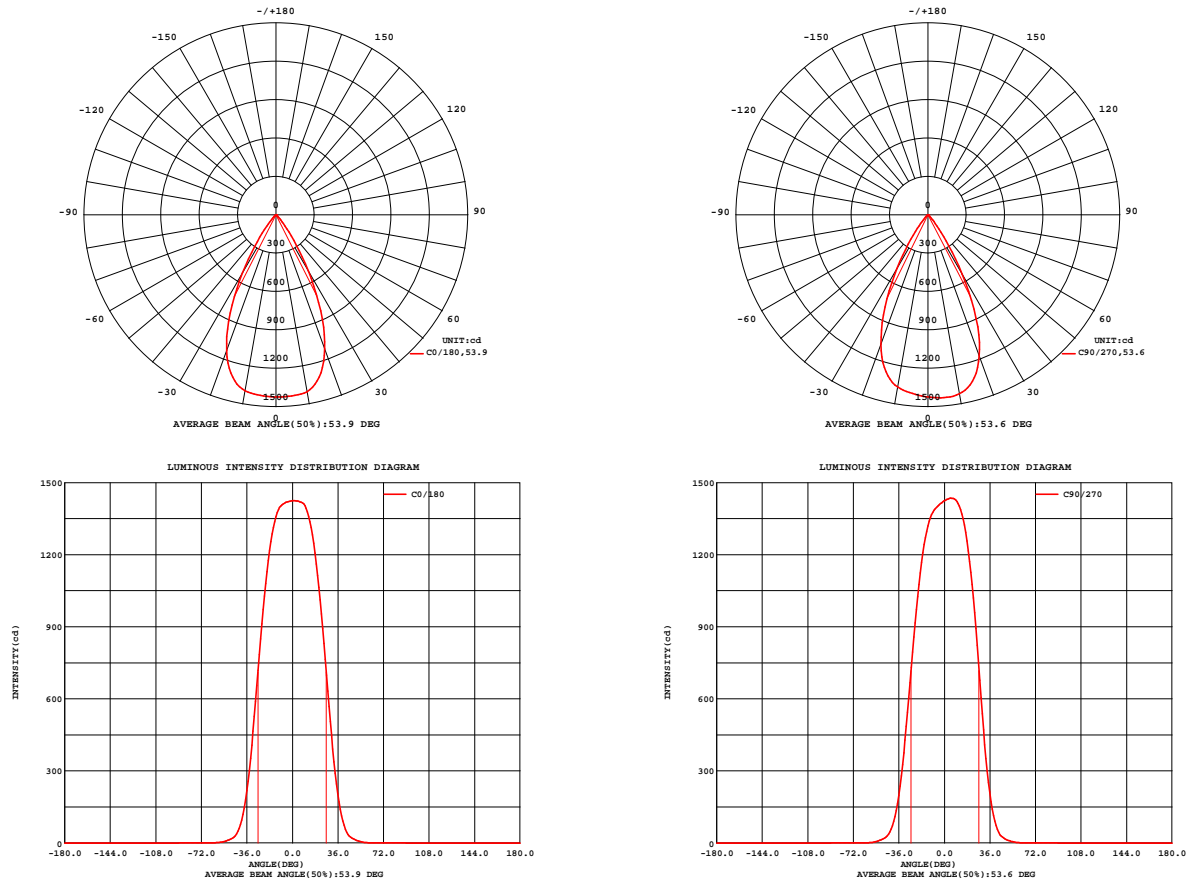


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2024-5-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRE-30G10TH-A-83 Ra: 90
LENS: PM-1082C-WH 50R
NO DRIVER: 300mA
30minutes warm-up

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:33.855V I:0.3000A P:10.156W PF:1.0000 Freq:0Hz Lamp Flux:1537.95x1 lm		
NAME: 2318.127-ACOT-70-HE	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405210569
MFR.: RISE	SUR.: 0.00362984m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 105.23 lm/W			
MODEL	Brideglux	Imax(cd)	1435	S/MH(C0/180)	0.81
NOMINAL POWER(W)	10	LOR(%)	69.5	S/MH(C90/270)	0.79
RATED VOLTAGE(V)	34	TOTAL FLUX(lm)	1068.8	η UP,DN(C0-180)	0.0,35.5
NOMINAL FLUX(lm)	1537.95	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,34.0
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	34	η down(%)	69.5	CIBSE SHR MAX	0.85

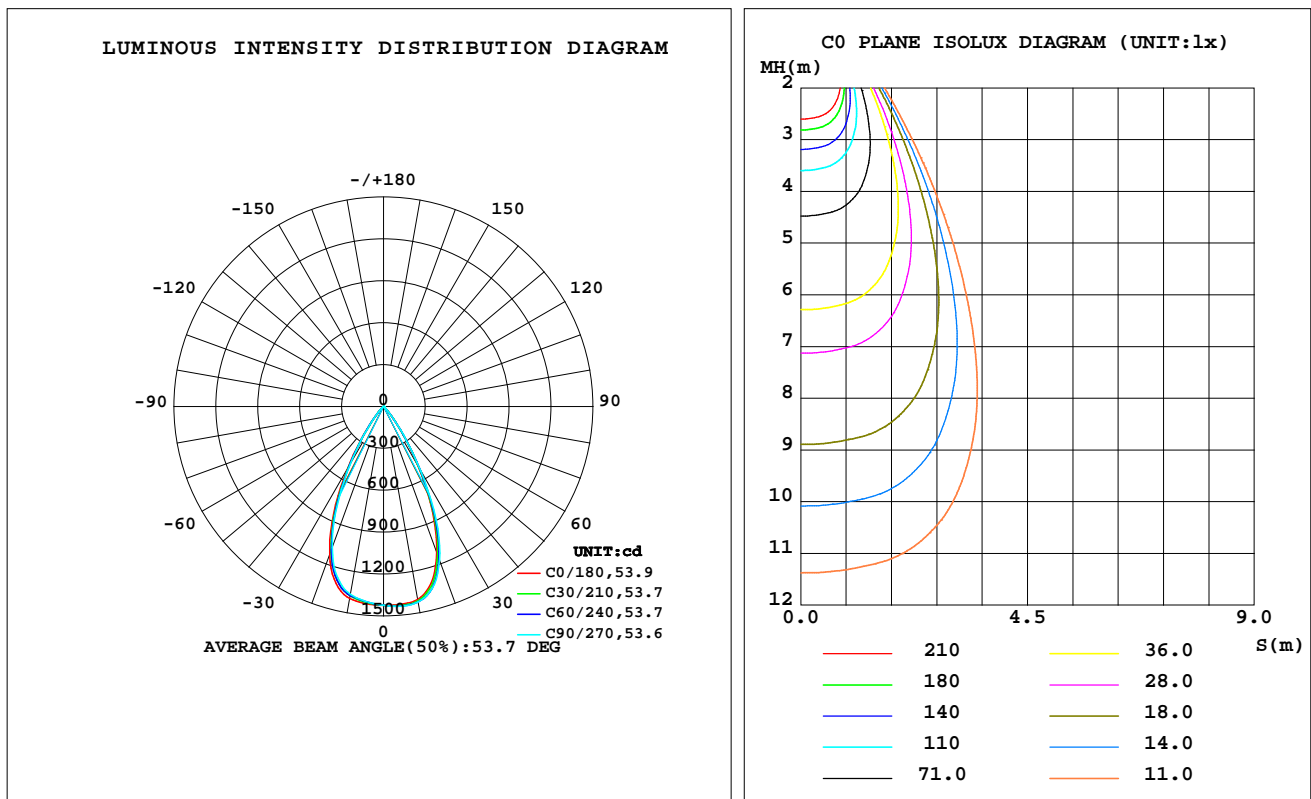

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90
LENS:PM-1082C-WH 50R
NO DRIVER:300mA
30minutes warm-up

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1404	1417	1421	1416	1396	1376	1366	1380	0- 10	134.8	134.8	12.6,8.77
20	1114	1147	1172	1165	1129	1097	1076	1076	10- 20	362.7	497.5	46.5,32.3
30	505.9	520.5	537.0	539.6	526.6	500.0	485.1	485.2	20- 30	375.8	873.3	81.7,56.8
40	91.19	92.31	91.60	95.74	95.24	91.01	90.16	90.30	30- 40	161.6	1035	96.8,67.3
50	12.48	12.14	11.96	13.08	12.97	13.58	12.97	12.24	40- 50	28.27	1063	99.5,69.1
60	1.245	1.240	1.272	1.348	1.342	1.331	1.268	1.211	50- 60	4.643	1068	99.9,69.4
70	0.3314	0.3250	0.3338	0.3602	0.3748	0.3655	0.3544	0.3262	60- 70	0.7432	1069	100,69.5
80	0.0575	0.0431	0.0542	0.0484	0.0549	0.0490	0.0546	0.0461	70- 80	0.1484	1069	100,69.5
90	0	0	0	0	0	0	0	0	80- 90	0.0265	1069	100,69.5
100	0	0	0	0	0	0	0	0	90-100	0	1069	100,69.5
110	0	0	0	0	0	0	0	0	100-110	0	1069	100,69.5
120	0	0	0	0	0	0	0	0	110-120	0	1069	100,69.5
130	0	0	0	0	0	0	0	0	120-130	0	1069	100,69.5
140	0	0	0	0	0	0	0	0	130-140	0	1069	100,69.5
150	0	0	0	0	0	0	0	0	140-150	0	1069	100,69.5
160	0	0	0	0	0	0	0	0	150-160	0	1069	100,69.5
170	0	0	0	0	0	0	0	0	160-170	0	1069	100,69.5
180	0	0	0	0	0	0	0	0	170-180	0	1069	100,69.5
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90
LENS:PM-1082C-WH 50R
NO DRIVER:300mA
30minutes warm-up

LUMINANCE LIMITATION CURVES

Test:U:33.855V I:0.3000A P:10.156W PF:1.0000 Freq:0Hz
Lamp Flux:1537.95x1 lm

NAME: 2318.127-ACOT-70-HE

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2405210569

MFR.: RISE

SUR.: 0.00362984m2

Shielding Angle:

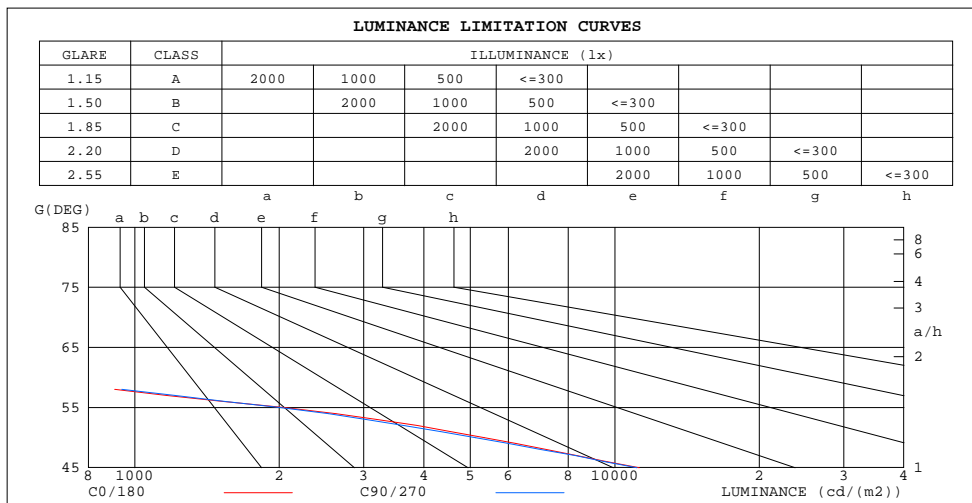

LUMINANCE cd/(m2)		
G(180)	C0/180	C90/270
85	97	93
80	91	86
75	113	112
70	267	269
65	455	463
60	685	701
55	2051	2010
50	5348	5125
45	11237	11120

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90
LENS:PM-1082C-WH 50R
NO DRIVER:300mA
30minutes warm-up

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:33.855V I:0.3000A P:10.156W PF:1.0000 Freq:0Hz
Lamp Flux:1537.95x1 lm

NAME: 2318.127-ACOT-70-HE

TYPE:

WEIGHT:

SPEC.: 3000K

DIM.:


SERIAL No.: 2405210569

MFR.: RISE

SUR.: 0.00362984m2

Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

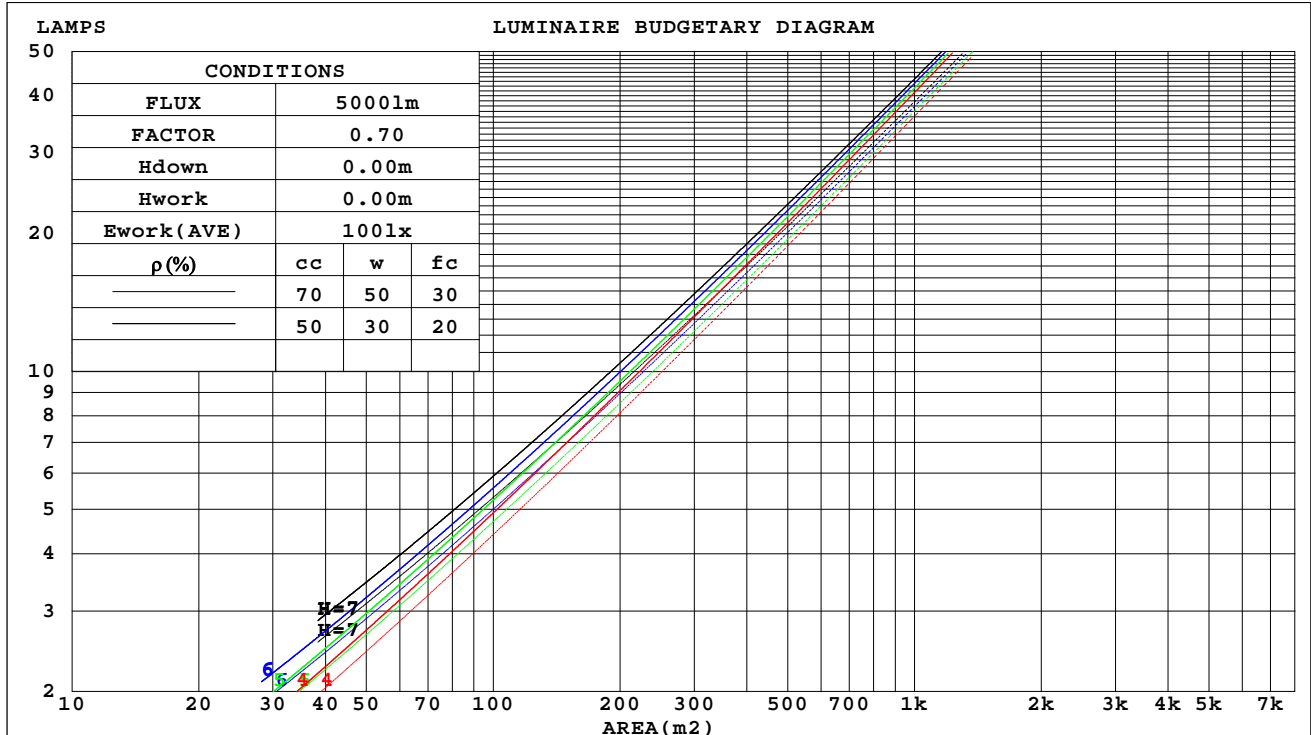

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3 °C
Operators:zoe
Test Date:2024-5-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90
LENS:PM-1082C-WH 50R
NO DRIVER:300mA
30minutes warm-up

WEC AND CCEC

Test:U:33.855V I:0.3000A P:10.156W PF:1.0000 Freq:0Hz Lamp Flux:1537.95x1 lm		
NAME: 2318.127-ACOT-70-HE	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405210569
MFR.: RISE	SUR.: 0.00362984m2	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.116	.066	.021	.111	.063	.020	.102	.059	.019	.094	.054	.017	.087	.050	.016	
2.0	.110	.060	.019	.106	.058	.018	.099	.055	.017	.092	.052	.016	.086	.049	.015	
3.0	.105	.056	.017	.101	.054	.016	.095	.052	.016	.089	.049	.015	.084	.047	.014	
4.0	.100	.052	.015	.097	.051	.015	.091	.049	.014	.087	.046	.014	.082	.045	.014	
5.0	.095	.048	.014	.093	.048	.014	.088	.046	.013	.084	.044	.013	.080	.043	.013	
6.0	.091	.046	.013	.089	.045	.013	.085	.043	.013	.081	.042	.012	.077	.041	.012	
7.0	.087	.043	.012	.085	.042	.012	.081	.041	.012	.078	.040	.012	.075	.039	.011	
8.0	.083	.041	.011	.082	.040	.011	.079	.039	.011	.076	.038	.011	.073	.037	.011	
9.0	.080	.039	.011	.079	.038	.011	.076	.037	.011	.073	.037	.010	.071	.036	.010	
10.0	.077	.037	.010	.076	.037	.010	.073	.036	.010	.071	.035	.010	.068	.034	.010	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.132	.132	.132	.113	.113	.113	.077	.077	.077	.044	.044	.044	.014	.014	.014		
1.0	.118	.109	.101	.101	.094	.087	.069	.065	.060	.040	.037	.035	.013	.012	.011		
2.0	.107	.092	.079	.092	.079	.069	.063	.055	.048	.036	.032	.028	.012	.010	.009		
3.0	.098	.079	.063	.084	.068	.055	.058	.047	.039	.033	.028	.023	.011	.009	.007		
4.0	.091	.069	.051	.078	.059	.045	.054	.041	.031	.031	.024	.019	.010	.008	.006		
5.0	.085	.060	.042	.073	.052	.037	.050	.036	.026	.029	.021	.015	.009	.007	.005		
6.0	.079	.054	.035	.068	.047	.031	.047	.033	.022	.027	.019	.013	.009	.006	.004		
7.0	.075	.048	.030	.064	.042	.026	.044	.029	.019	.026	.017	.011	.008	.006	.004		
8.0	.071	.044	.026	.061	.038	.022	.042	.027	.016	.025	.016	.009	.008	.005	.003		
9.0	.067	.040	.022	.058	.035	.019	.040	.025	.014	.023	.015	.008	.008	.005	.003		
10.0	.064	.037	.020	.055	.032	.017	.038	.023	.012	.022	.014	.007	.007	.004	.002		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90
LENS:PM-1082C-WH 50R
NO DRIVER:300mA
30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:33.855V I:0.3000A P:10.156W PF:1.0000 Freq:0Hz Lamp Flux:1537.95x1 lm										
NAME: 2318.127-ACOT-70-HE					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2405210569		
MFR.: RISE					SUR.: 0.00362984m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.0	16.9	16.3	17.1	17.2	16.2	17.1	16.4	17.3	17.4
3H	15.9	16.7	16.1	16.9	17.1	16.1	16.9	16.3	17.1	17.3
4H	15.8	16.5	16.1	16.8	17.0	16.0	16.7	16.2	17.0	17.2
6H	15.7	16.4	16.0	16.6	16.9	15.9	16.6	16.2	16.8	17.1
8H	15.7	16.3	16.0	16.6	16.8	15.8	16.5	16.1	16.8	17.0
12H	15.6	16.3	15.9	16.5	16.8	15.8	16.5	16.1	16.7	17.0
4H 2H	15.8	16.5	16.1	16.8	17.0	16.0	16.7	16.3	17.0	17.2
3H	15.6	16.3	15.9	16.5	16.8	15.8	16.5	16.1	16.7	17.0
4H	15.5	16.1	15.9	16.4	16.7	15.7	16.3	16.1	16.6	16.9
6H	15.4	15.9	15.8	16.3	16.6	15.6	16.1	16.0	16.5	16.8
8H	15.4	15.9	15.8	16.2	16.6	15.6	16.0	15.9	16.4	16.8
12H	15.3	15.8	15.7	16.1	16.5	15.5	15.9	15.9	16.3	16.7
8H 4H	15.4	15.9	15.8	16.2	16.6	15.6	16.0	15.9	16.4	16.8
6H	15.3	15.7	15.7	16.1	16.5	15.5	15.9	15.9	16.2	16.7
8H	15.2	15.6	15.7	16.0	16.4	15.4	15.7	15.8	16.2	16.6
12H	15.1	15.4	15.6	15.9	16.4	15.3	15.6	15.8	16.1	16.6
12H 4H	15.3	15.8	15.7	16.1	16.5	15.5	15.9	15.9	16.3	16.7
6H	15.2	15.6	15.7	16.0	16.4	15.4	15.7	15.8	16.2	16.6
8H	15.1	15.4	15.6	15.9	16.4	15.3	15.6	15.8	16.1	16.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 4.0 / -18.5					+ 4.0 / -18.6				
1.5H	+ 6.5 / -13.7					+ 6.5 / -13.9				
2.0H	+ 6.7 / -12.0					+ 6.7 / -12.0				

CIE Pub.117, 1538 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.5)
Area: 0.00362984 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90
LENS:PM-1082C-WH 50R
NO DRIVER:300mA
30minutes warm-up

UTILIZATION FACTORS TABLE

Test:U:33.855V I:0.3000A P:10.156W PF:1.0000 Freq:0Hz Lamp Flux:1537.95x1 lm		
NAME: 2318.127-ACOT-70-HE	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405210569
MFR.: RISE	SUR.: 0.00362984m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	62	58	56	62	58	56	61	58	55	53
0.80	67	63	61	67	63	61	66	63	61	58
1.00	70	66	64	69	66	64	68	66	64	61
1.25	73	69	67	72	69	67	71	68	66	64
1.50	74	71	69	74	71	69	72	70	68	65
2.00	76	73	71	75	73	71	73	71	70	66
2.50	77	75	73	76	74	72	74	72	71	67
3.00	78	76	74	77	75	73	75	73	72	68
4.00	79	78	76	78	77	75	76	74	73	69
5.00	80	79	78	79	78	77	76	75	74	69
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90
LENS:PM-1082C-WH 50R
NO DRIVER:300mA
30minutes warm-up

ISOCANDELA DIAGRAM

Test:U:33.855V I:0.3000A P:10.156W PF:1.0000 Freq:0Hz Lamp Flux:1537.95x1 lm		
NAME: 2318.127-ACOT-70-HE	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405210569
MFR.: RISE	SUR.: 0.00362984m2	Shielding Angle:

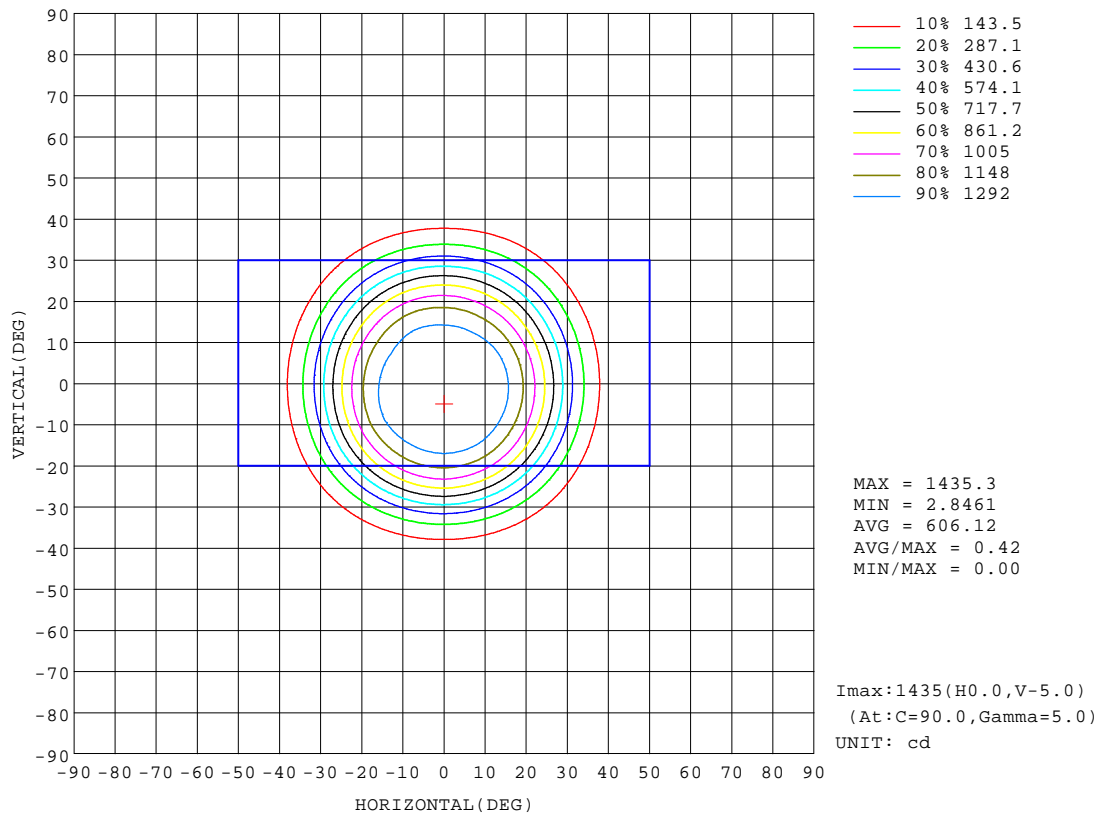


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90
LENS:PM-1082C-WH 50R
NO DRIVER:300mA
30minutes warm-up

AAI Figure

Test:U:33.855V I:0.3000A P:10.156W PF:1.0000 Freq:0Hz Lamp Flux:1537.95x1 lm		
NAME: 2318.127-ACOT-70-HE	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405210569
MFR.: RISE	SUR.: 0.00362984m2	Shielding Angle:

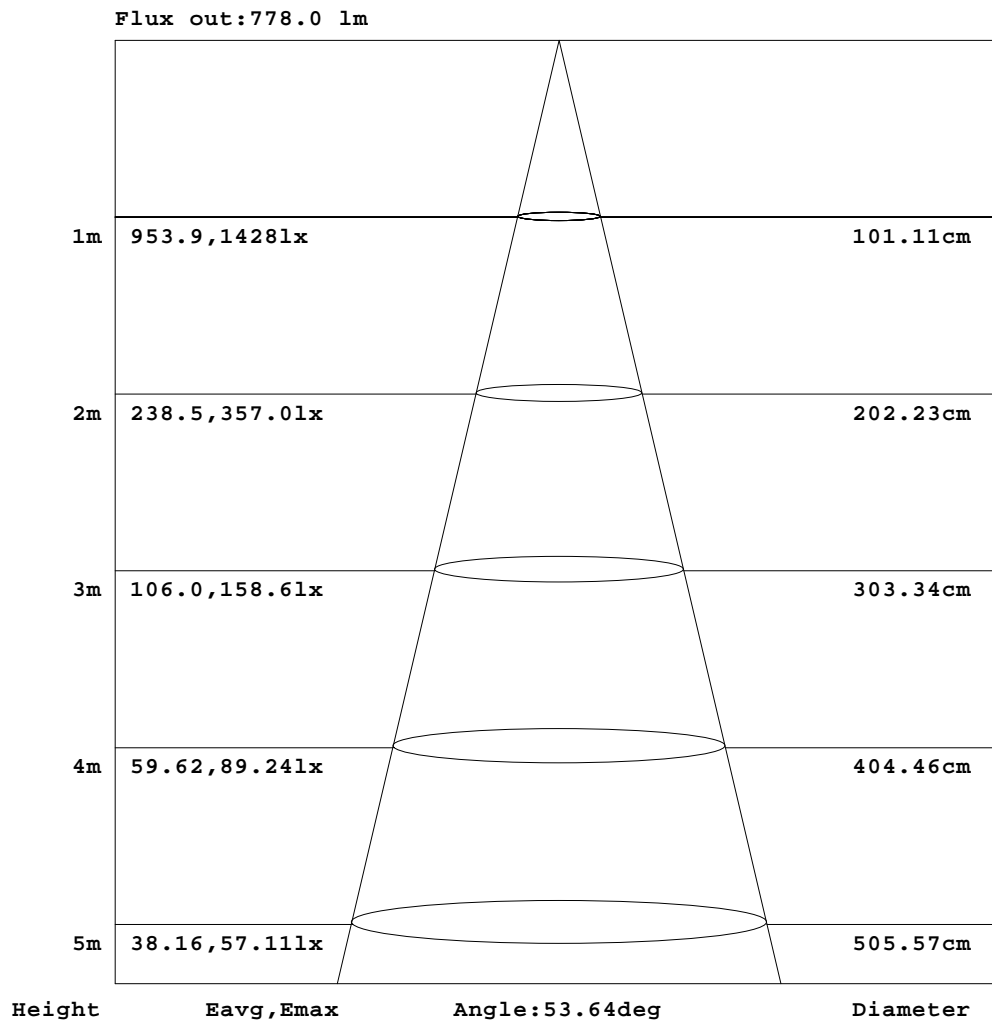


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2024-5-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRE-30G10TH-A-83 Ra: 90
LENS: PM-1082C-WH 50R
NO DRIVER: 300mA
30minutes warm-up

ISOLUX DIAGRAM

Test:U:33.855V I:0.3000A P:10.156W PF:1.0000 Freq:0Hz Lamp Flux:1537.95x1 lm		
NAME: 2318.127-ACOT-70-HE	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405210569
MFR.: RISE	SUR.: 0.00362984m2	Shielding Angle:

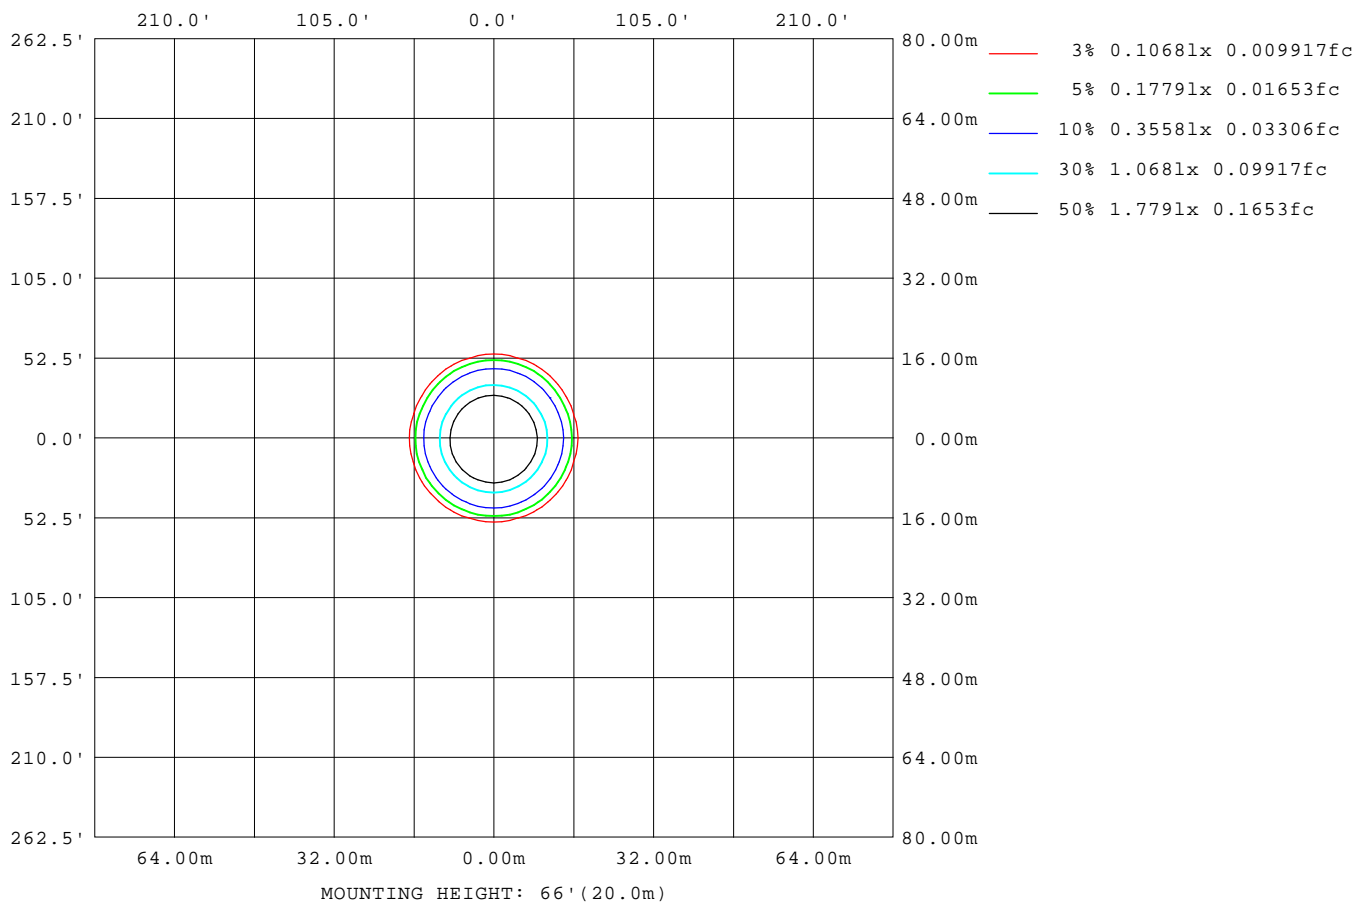

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90
LENS:PM-1082C-WH 50R
NO DRIVER:300mA
30minutes warm-up

LED Avg.L Report

Test:U:33.855V I:0.3000A P:10.156W PF:1.0000 Freq:0Hz Lamp Flux:1537.95x1 lm		
NAME: 2318.127-ACOT-70-HE	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405210569
MFR.: RISE	SUR.: 0.00362984m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	476
L_0~180(75)av	120
L_0~180(85)av	98
L_90~270(65)av	467
L_90~270(75)av	113
L_90~270(85)av	93
L_45(65)av	471
L_45(75)av	110
L_45(85)av	58

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90
LENS:PM-1082C-WH 50R
NO DRIVER:300mA
30minutes warm-up

Planar Illuminance Curve

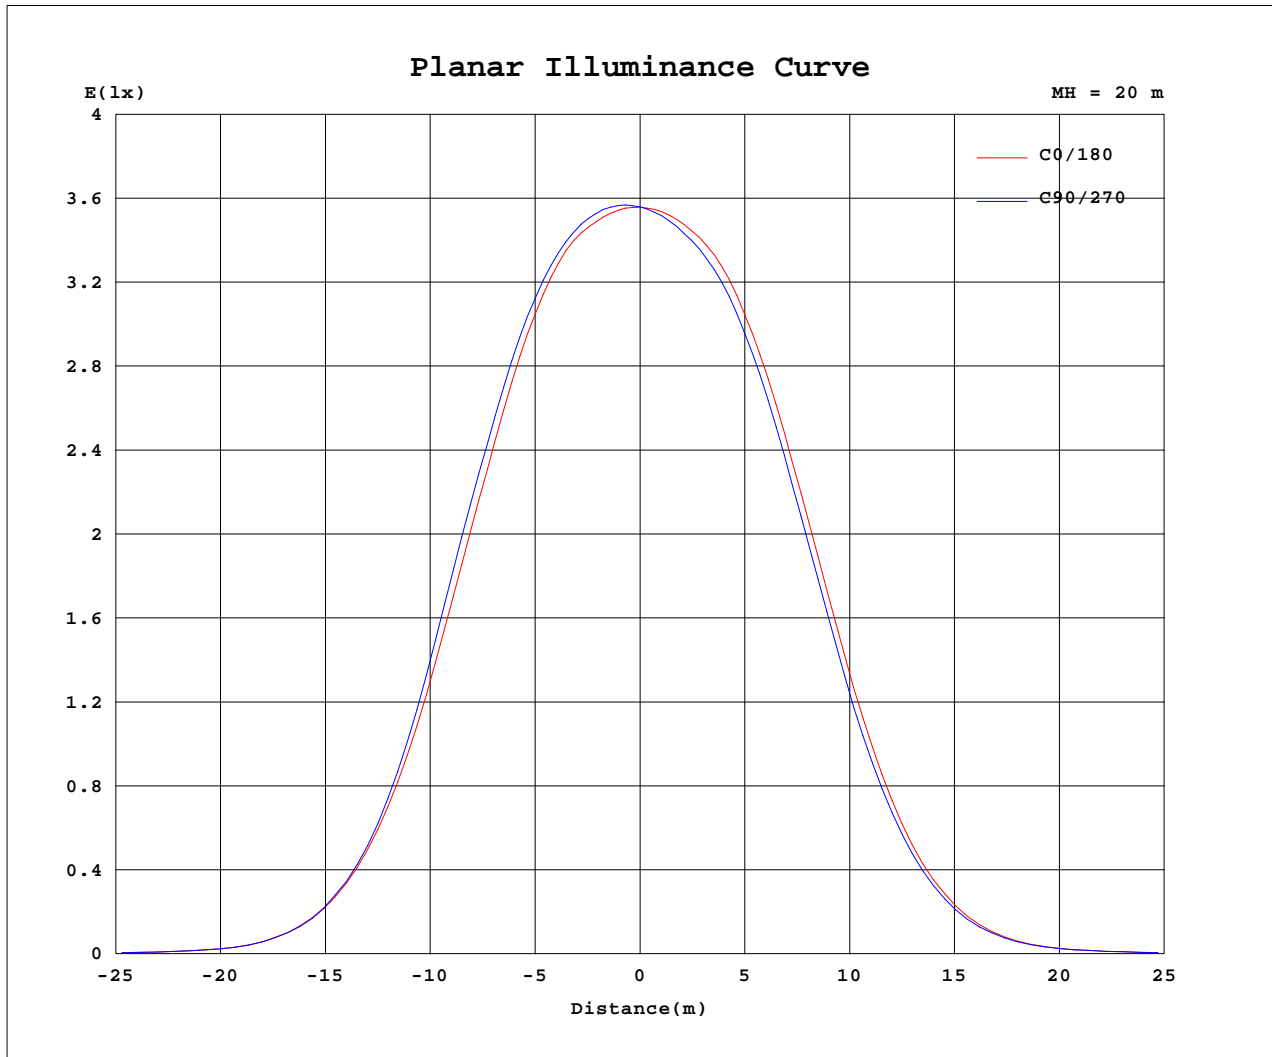

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: zoe
 Test Date: 2024-5-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: BXRE-30G10TH-A-83 Ra: 90
 LENS: PM-1082C-WH 50R
 NO DRIVER: 300mA
 30minutes warm-up



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:33.855V I:0.3000A P:10.156W PF:1.0000 Freq:0Hz Lamp Flux:1537.95x1 lm		
NAME: 2318.127-ACOT-70-HE	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405210569
MFR.: RISE	SUR.: 0.00362984m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1424	1424	1424	1424	1424	1424	1424	1424	1424	1424	1424	1424						
5	1422	1429	1434	1435	1432	1426	1417	1409	1404	1402	1405	1412						
10	1404	1413	1421	1421	1418	1415	1396	1377	1374	1366	1371	1388						
15	1312	1328	1348	1348	1341	1344	1313	1285	1288	1270	1269	1292						
20	1114	1134	1161	1172	1167	1162	1129	1101	1093	1076	1068	1085						
25	830	852	874	893	890	875	849	822	808	795	793	799						
30	506	513	528	537	541	538	527	504	496	485	486	484						
35	246	246	251	252	256	259	257	242	242	237	240	235						
40	91.2	91.3	93.4	91.6	94.9	96.6	95.2	90.1	91.9	90.2	91.4	89.2						
45	28.9	28.7	29.5	28.5	30.2	31.0	30.1	29.8	30.9	29.5	29.1	27.9						
50	12.5	12.0	12.3	12.0	12.8	13.3	13.0	13.2	14.0	13.0	12.4	12.1						
55	4.27	4.22	4.16	4.18	4.46	4.82	4.67	4.89	4.99	4.56	4.24	4.07						
60	1.24	1.24	1.24	1.27	1.32	1.38	1.34	1.34	1.32	1.27	1.22	1.21						
65	0.70	0.69	0.70	0.71	0.74	0.77	0.76	0.76	0.75	0.72	0.69	0.68						
70	0.33	0.32	0.33	0.33	0.35	0.37	0.37	0.37	0.36	0.35	0.33	0.32						
75	0.11	0.10	0.10	0.10	0.11	0.11	0.12	0.11	0.11	0.11	0.10	0.10						
80	0.06	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05						
85	0.03	0.02	0.02	0.03	0.02	0.02	0.03	0.02	0.02	0.03	0.02	0.02						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90
LENS:PM-1082C-WH 50R
NO DRIVER:300mA
30minutes warm-up