


### Luminaire Photograph

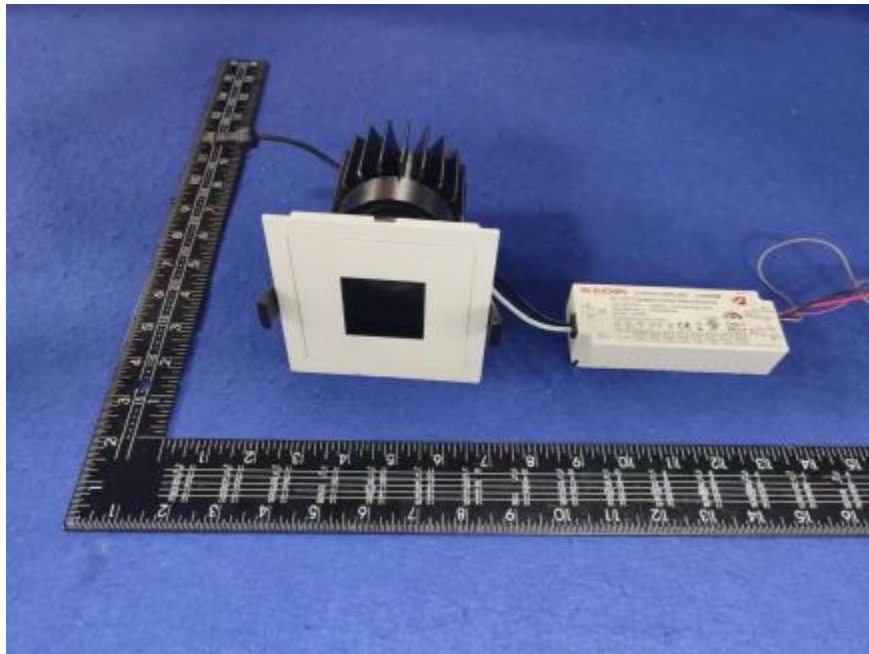

Light Output Ratio:	49.1%	
Luminaire Power:	23.71 W	
SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	0.30	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2023-10-30

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRE-30G2000-C-83 Ra:90  
LENS: PM-1083 15R  
DRIVER: PUP40A-1WMC-850 600mA  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

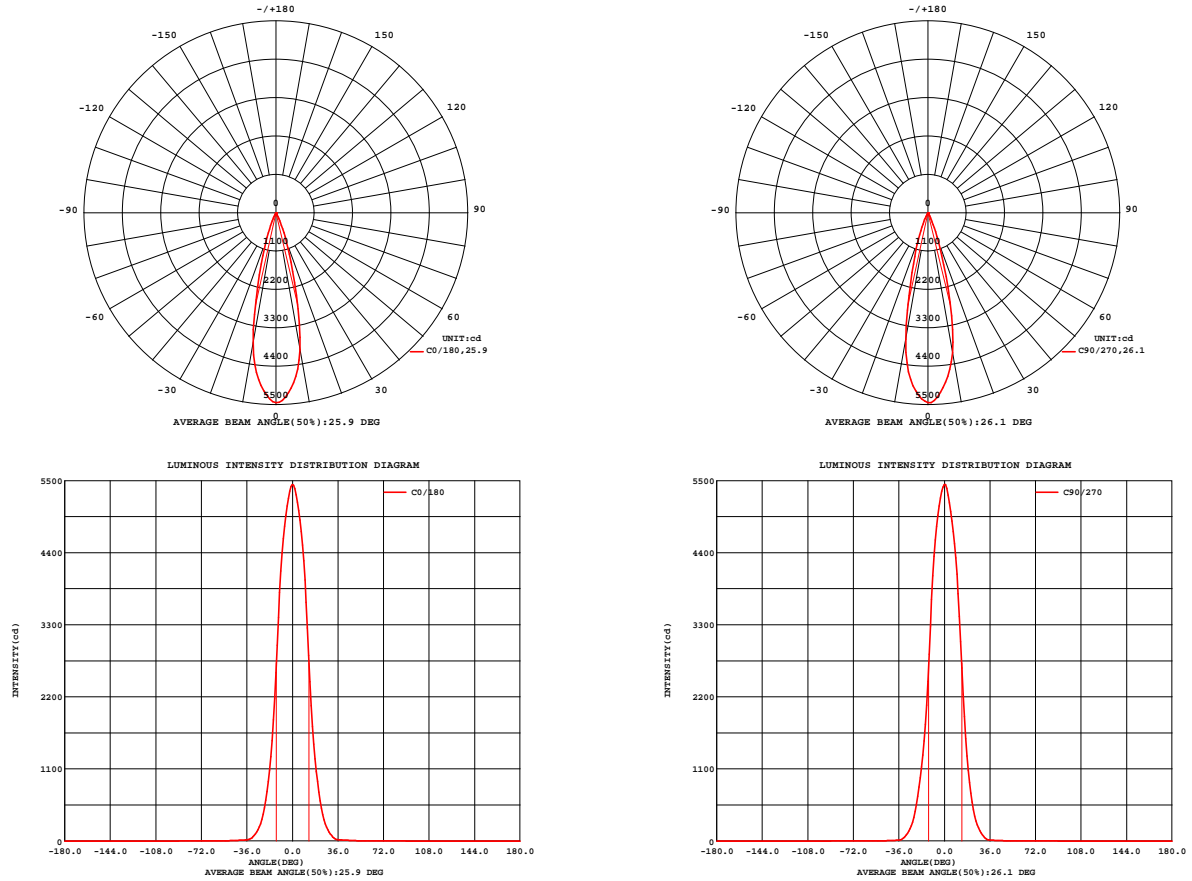


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2023-10-30

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRE-30G2000-C-83 Ra: 90  
LENS: PM-1083 15R  
DRIVER: PUP40A-1WMC-850 600mA  
30minutes warm-up

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.16V I:0.1992A P:23.712W PF:0.9890 Freq:59.98Hz Lamp Flux:2450x1 lm		
NAME: 2318.154-ACOT-84-AM	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2310301288
MFR.: RISE	SUR.: 0.001681m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 50.76 lm/W
MODEL	Bridgelux	Imax(cd)	5444	S/MH(C0/180)	0.41	
NOMINAL POWER(W)	24	LOR(%)	49.1	S/MH(C90/270)	0.41	
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1203.5	UP,DN(C0-180)	0.0,25.5	
NOMINAL FLUX(lm)	2450	CIE CLASS	DIRECT	UP,DN(C180-360)	0.0,23.6	
LAMPS INSIDE	1	up(%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)	120	down(%)	49.1	CIBSE SHR MAX	0.30	

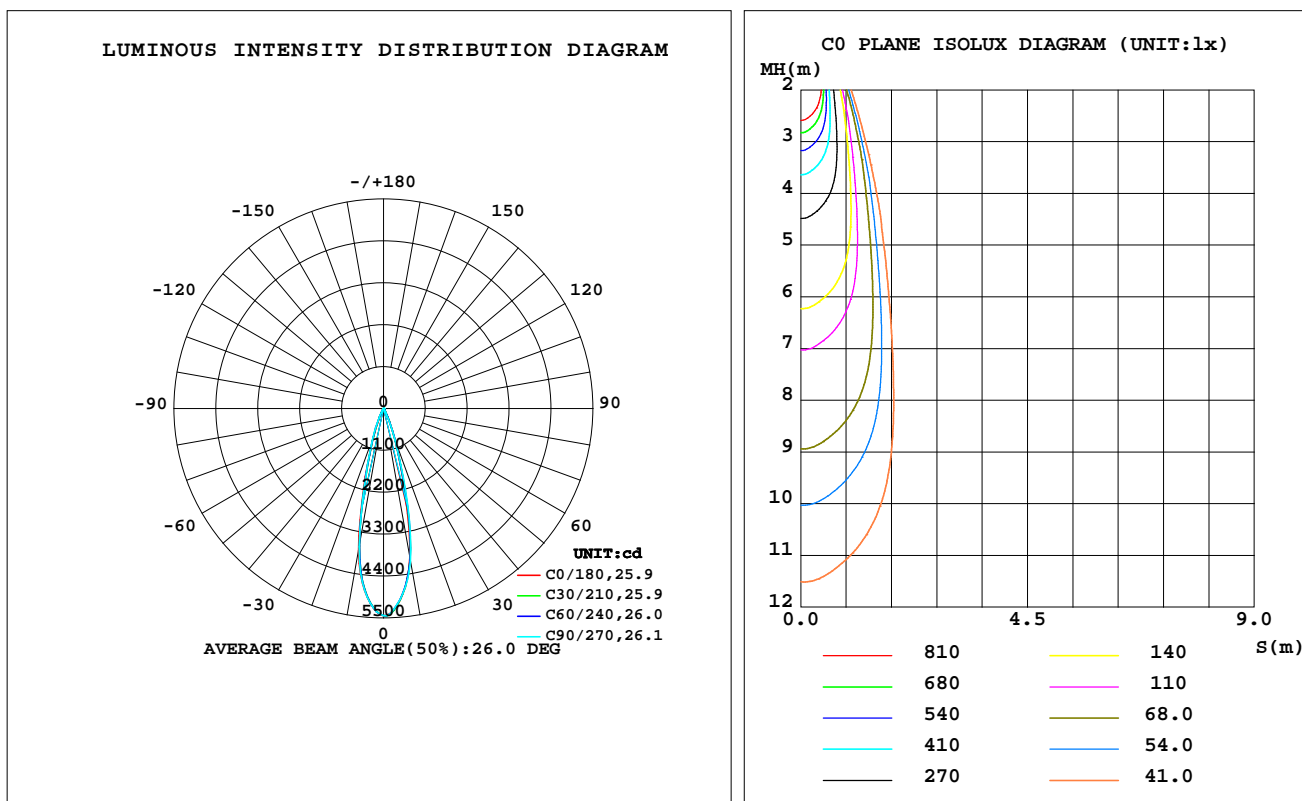

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-10-30

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
LENS:PM-1083 15R  
DRIVER: PUP40A-1WMC-850 600mA  
30minutes warm-up

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

	C0	C45	C90	C135	C180	C225	C270	C315		zone	total	%lum,lamp
10	3985	4027	4070	3960	3794	3666	3685	3821	0- 10	442.8	442.8	36.8,18.1
20	908.5	913.9	889.6	844.1	755.3	779.6	823.7	883.2	10- 20	557.3	1000	83.1,40.8
30	106.4	142.0	93.92	128.0	84.14	115.5	89.27	139.3	20- 30	167.4	1168	97,47.7
40	13.72	10.67	9.553	11.45	12.21	9.267	8.718	11.06	30- 40	26.31	1194	99.2,48.7
50	5.065	3.848	2.882	4.467	4.440	3.152	2.599	4.420	40- 50	5.397	1199	99.6,48.9
60	2.811	1.753	1.877	1.950	2.474	1.282	1.505	1.761	50- 60	2.296	1202	99.8,49
70	1.139	0.8105	0.9218	0.8666	0.9855	0.5289	0.6338	0.6769	60- 70	1.270	1203	99.9,49.1
80	0.4135	0.2731	0.3746	0.2761	0.3556	0.2415	0.4038	0.2453	70- 80	0.5342	1203	100,49.1
90	0	0	0	0	0	0	0	0	80- 90	0.1745	1203	100,49.1
100	0	0	0	0	0	0	0	0	90-100	0	1203	100,49.1
110	0	0	0	0	0	0	0	0	100-110	0	1203	100,49.1
120	0	0	0	0	0	0	0	0	110-120	0	1203	100,49.1
130	0	0	0	0	0	0	0	0	120-130	0	1203	100,49.1
140	0	0	0	0	0	0	0	0	130-140	0	1203	100,49.1
150	0	0	0	0	0	0	0	0	140-150	0	1203	100,49.1
160	0	0	0	0	0	0	0	0	150-160	0	1203	100,49.1
170	0	0	0	0	0	0	0	0	160-170	0	1203	100,49.1
180	0	0	0	0	0	0	0	0	170-180	0	1203	100,49.1
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:zoe  
 Test Date:2023-10-30

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:3.160m [K=1.0000]  
 Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
 LENS:PM-1083 15R  
 DRIVER: PUP40A-1WMC-850 600mA  
 30minutes warm-up

## LUMINANCE LIMITATION CURVES

Test:U:120.16V I:0.1992A P:23.712W PF:0.9890 Freq:59.98Hz  
Lamp Flux:2450x1 lm

NAME: 2318.154-ACOT-84-AM

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2310301288

MFR.: RISE

SUR.: 0.001681m2

Shielding Angle:

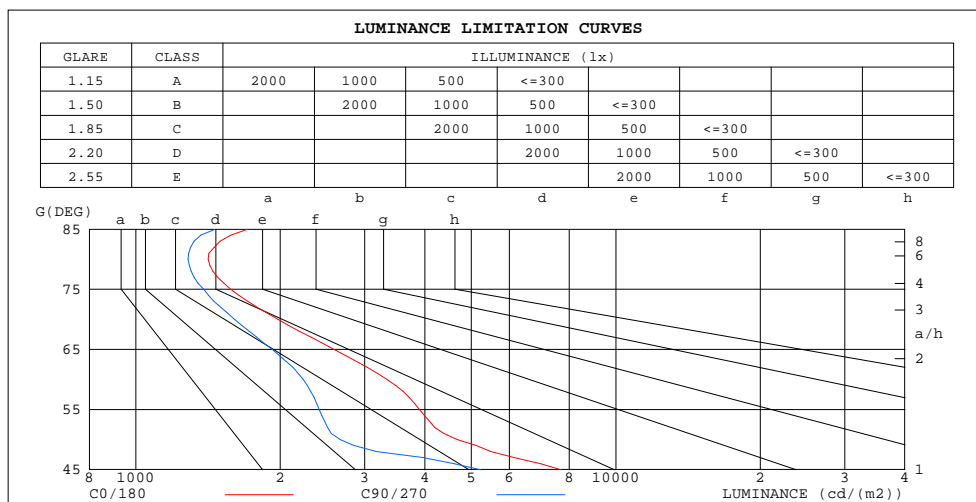

LUMINANCE cd/(m2)		
G(180)	C0/180	C90/270
85	1708	1462
80	1414	1284
75	1576	1384
70	1977	1604
65	2588	1924
60	3339	2234
55	3901	2411
50	4680	2668
45	7680	5224

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-10-30

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
LENS:PM-1083 15R  
DRIVER: PUP40A-1WMC-850 600mA  
30minutes warm-up

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.16V I:0.1992A P:23.712W PF:0.9890 Freq:59.98Hz  
Lamp Flux:2450x1 lm

NAME: 2318.154-ACOT-84-AM

TYPE:

WEIGHT:

SPEC.: 3000K

DIM.:


SERIAL No.: 2310301288

MFR.: RISE

SUR.: 0.001681m2

Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

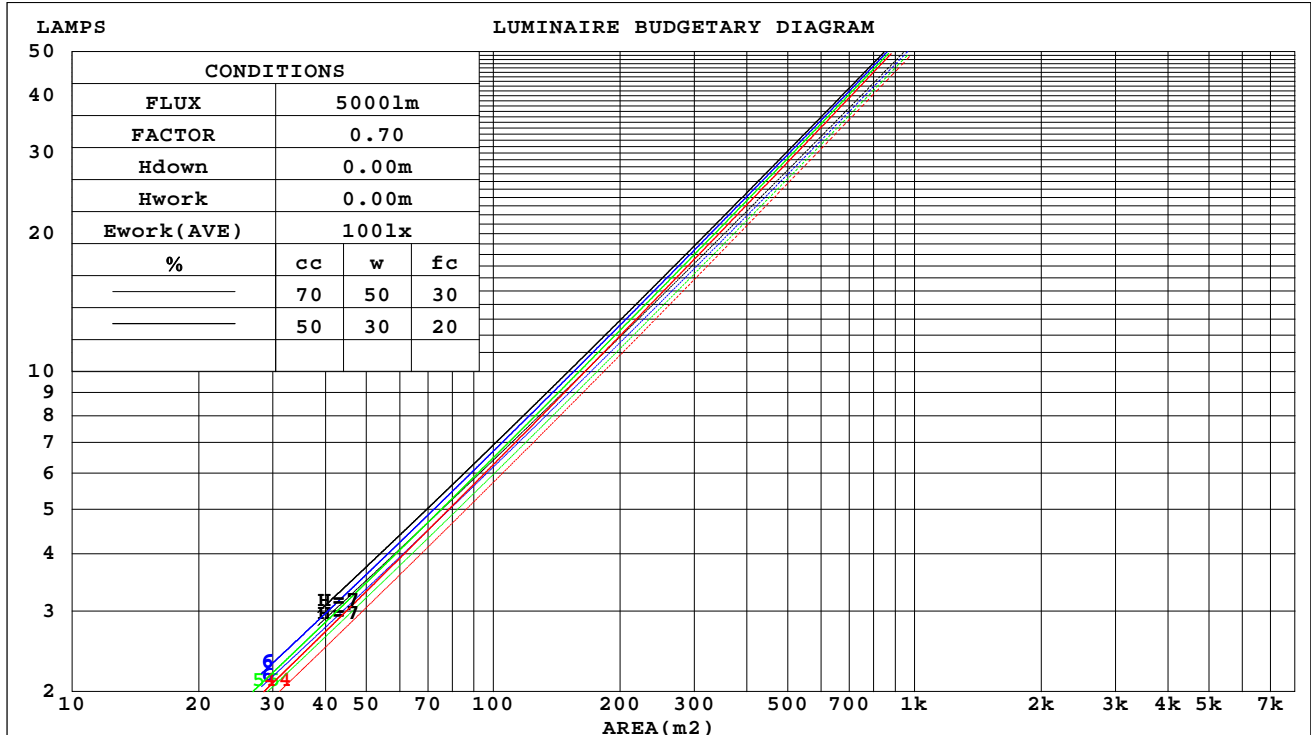

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-10-30

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
LENS:PM-1083 15R  
DRIVER: PUP40A-1WMC-850 600mA  
30minutes warm-up

### WEC AND CCEC

Test:U:120.16V I:0.1992A P:23.712W PF:0.9890 Freq:59.98Hz Lamp Flux:2450x1 lm		
NAME: 2318.154-ACOT-84-AM	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2310301288
MFR.: RISE	SUR.: 0.001681m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0			
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0			
fc	20%			20%			20%			20%			20%			0			
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)												
0.0																			
1.0	.066	.037	.012	.062	.036	.011	.056	.032	.010	.051	.029	.009	.046	.026	.009				
2.0	.061	.033	.010	.058	.032	.010	.053	.029	.009	.048	.027	.008	.044	.025	.008				
3.0	.056	.030	.009	.054	.029	.009	.050	.027	.008	.046	.025	.008	.043	.024	.007				
4.0	.053	.027	.008	.051	.027	.008	.047	.025	.008	.044	.024	.007	.041	.022	.007				
5.0	.050	.025	.007	.048	.025	.007	.045	.023	.007	.042	.022	.007	.040	.021	.006				
6.0	.047	.024	.007	.046	.023	.007	.043	.022	.006	.041	.021	.006	.038	.020	.006				
7.0	.045	.022	.006	.043	.022	.006	.041	.021	.006	.039	.020	.006	.037	.019	.006				
8.0	.042	.021	.006	.041	.020	.006	.040	.020	.006	.038	.019	.006	.036	.018	.005				
9.0	.041	.020	.005	.040	.019	.005	.038	.019	.005	.036	.018	.005	.035	.018	.005				
10.0	.039	.019	.005	.038	.018	.005	.037	.018	.005	.035	.017	.005	.034	.017	.005				

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.094	.094	.094	.080	.080	.080	.055	.055	.055	.031	.031	.031	.010	.010	.010	
1.0	.083	.077	.073	.071	.066	.063	.048	.046	.043	.028	.026	.025	.009	.009	.008	
2.0	.074	.065	.058	.063	.056	.050	.043	.039	.035	.025	.023	.021	.008	.007	.007	
3.0	.066	.056	.047	.057	.048	.041	.039	.033	.029	.022	.019	.017	.007	.006	.006	
4.0	.060	.048	.039	.051	.042	.034	.035	.029	.024	.020	.017	.014	.007	.006	.005	
5.0	.055	.042	.033	.047	.036	.028	.032	.025	.020	.019	.015	.012	.006	.005	.004	
6.0	.050	.037	.028	.043	.032	.024	.030	.022	.017	.017	.013	.010	.006	.004	.003	
7.0	.046	.033	.024	.040	.029	.021	.028	.020	.015	.016	.012	.009	.005	.004	.003	
8.0	.043	.030	.020	.037	.026	.018	.026	.018	.013	.015	.011	.007	.005	.003	.002	
9.0	.040	.027	.018	.035	.023	.015	.024	.016	.011	.014	.010	.007	.005	.003	.002	
10.0	.038	.025	.016	.033	.021	.014	.023	.015	.010	.013	.009	.006	.004	.003	.002	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-10-30

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
LENS:PM-1083 15R  
DRIVER: PUP40A-1WMC-850 600mA  
30minutes warm-up

## UGR(Unified Glare Rating) Table

Test:U:120.16V I:0.1992A P:23.712W PF:0.9890 Freq:59.98Hz Lamp Flux:2450x1 lm										
NAME: 2318.154-ACOT-84-AM					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2310301288		
MFR.: RISE					SUR.: 0.001681m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	5.0	5.7	5.2	5.8	6.0	3.5	4.2	3.7	4.3	4.5
3H	5.1	5.7	5.3	5.8	6.0	3.6	4.2	3.8	4.4	4.5
4H	5.1	5.6	5.3	5.8	6.0	3.6	4.2	3.9	4.4	4.6
6H	5.1	5.6	5.3	5.8	6.0	3.6	4.1	3.9	4.3	4.6
8H	5.0	5.5	5.3	5.8	6.0	3.6	4.1	3.9	4.3	4.6
12H	5.0	5.5	5.3	5.8	6.0	3.6	4.1	3.9	4.3	4.6
4H 2H	4.9	5.4	5.1	5.7	5.9	3.4	4.0	3.7	4.2	4.4
3H	4.9	5.4	5.3	5.7	6.0	3.5	4.0	3.8	4.3	4.5
4H	5.0	5.4	5.3	5.7	6.0	3.5	4.0	3.9	4.3	4.6
6H	4.9	5.3	5.3	5.7	6.0	3.6	4.0	3.9	4.3	4.6
8H	4.9	5.3	5.3	5.7	6.0	3.6	3.9	3.9	4.3	4.6
12H	4.9	5.3	5.3	5.6	6.0	3.6	3.9	4.0	4.3	4.7
8H 4H	4.8	5.2	5.2	5.6	5.9	3.4	3.8	3.8	4.2	4.5
6H	4.8	5.2	5.3	5.5	6.0	3.5	3.8	3.9	4.2	4.6
8H	4.8	5.1	5.3	5.5	6.0	3.5	3.8	3.9	4.2	4.6
12H	4.8	5.1	5.3	5.5	6.0	3.5	3.8	4.0	4.2	4.7
12H 4H	4.8	5.1	5.2	5.5	5.9	3.4	3.7	3.8	4.1	4.5
6H	4.8	5.1	5.2	5.5	5.9	3.4	3.7	3.9	4.1	4.6
8H	4.8	5.0	5.3	5.5	5.9	3.4	3.7	3.9	4.1	4.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.6 / - 2.0					+ 1.3 / - 1.9				
1.5H	+ 2.9 / - 2.6					+ 2.3 / - 1.9				
2.0H	+ 3.6 / - 2.1					+ 2.6 / - 1.2				

CIE Pub.117, 2450 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 3.1)  
Area: 0.001681 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-10-30

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
LENS:PM-1083 15R  
DRIVER: PUP40A-1WMC-850 600mA  
30minutes warm-up



### UTILIZATION FACTORS TABLE

Test:U:120.16V I:0.1992A P:23.712W PF:0.9890 Freq:59.98Hz Lamp Flux:2450x1 lm		
NAME: 2318.154-ACOT-84-AM	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2310301288
MFR.: RISE	SUR.: 0.001681m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	45	42	40	45	42	40	44	42	40	39
0.80	48	46	44	48	45	44	47	45	44	42
1.00	50	48	46	50	47	46	49	47	46	44
1.25	52	49	48	51	49	48	50	49	47	45
1.50	53	51	49	52	50	49	51	50	49	47
2.00	54	52	51	53	52	50	52	51	50	47
2.50	55	53	52	54	52	51	52	51	50	48
3.00	55	54	53	54	53	52	53	52	51	48
4.00	56	55	54	55	54	53	54	53	52	49
5.00	57	56	55	56	55	54	54	53	53	49
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-10-30

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
LENS:PM-1083 15R  
DRIVER: PUP40A-1WMC-850 600mA  
30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:120.16V I:0.1992A P:23.712W PF:0.9890 Freq:59.98Hz Lamp Flux:2450x1 lm		
NAME: 2318.154-ACOT-84-AM	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2310301288
MFR.: RISE	SUR.: 0.001681m2	Shielding Angle:

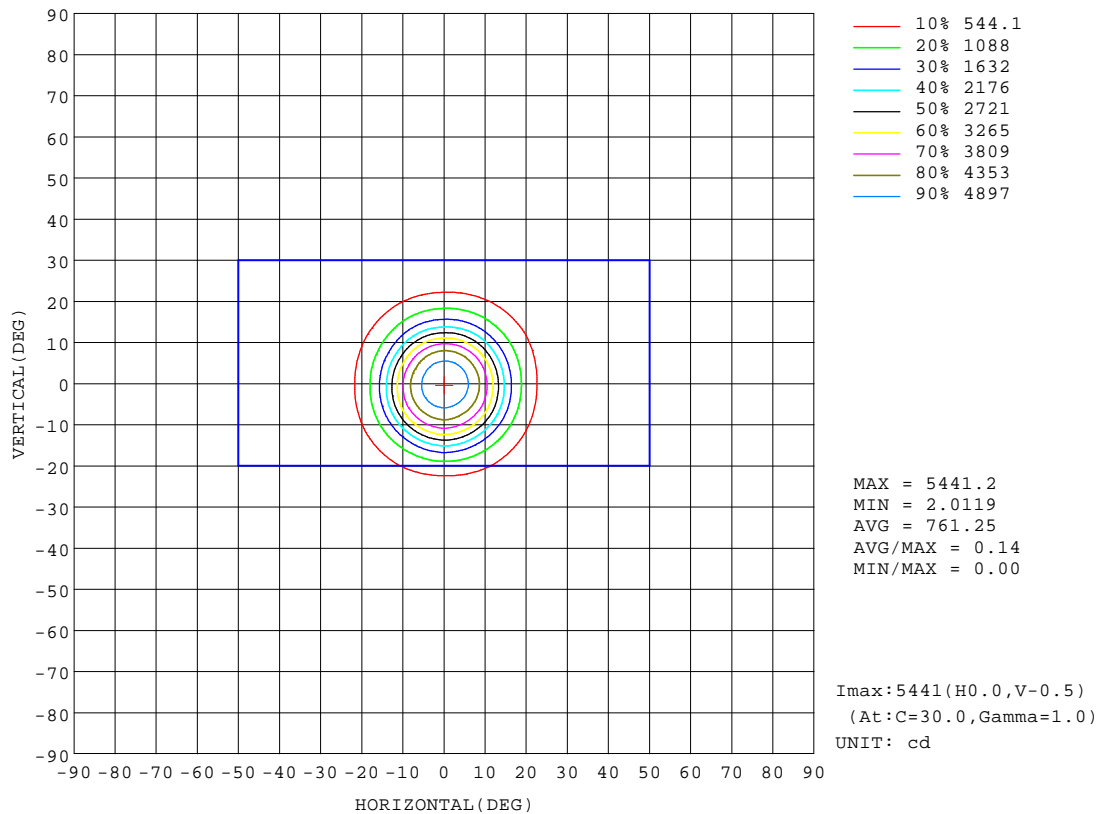


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2023-10-30

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRE-30G2000-C-83 Ra: 90  
LENS: PM-1083 15R  
DRIVER: PUP40A-1WMC-850 600mA  
30minutes warm-up

## AAI Figure

Test:U:120.16V I:0.1992A P:23.712W PF:0.9890 Freq:59.98Hz Lamp Flux:2450x1 lm		
NAME: 2318.154-ACOT-84-AM	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2310301288
MFR.: RISE	SUR.: 0.001681m2	Shielding Angle:

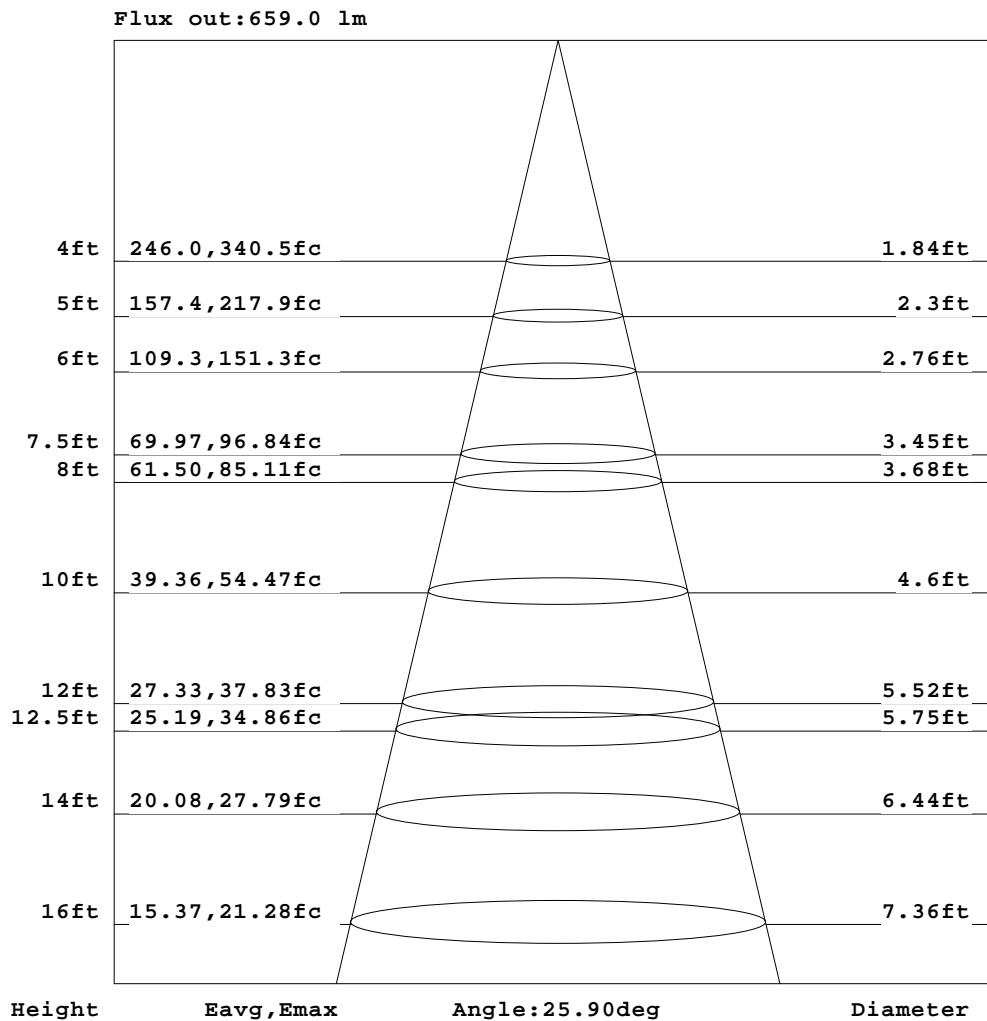


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators: zoe  
Test Date: 2023-10-30

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRE-30G2000-C-83 Ra: 90  
LENS: PM-1083 15R  
DRIVER: PUP40A-1WMC-850 600mA  
30minutes warm-up

## ISOLUX DIAGRAM

Test:U:120.16V I:0.1992A P:23.712W PF:0.9890 Freq:59.98Hz Lamp Flux:2450x1 lm		
NAME: 2318.154-ACOT-84-AM	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2310301288
MFR.: RISE	SUR.: 0.001681m2	Shielding Angle:

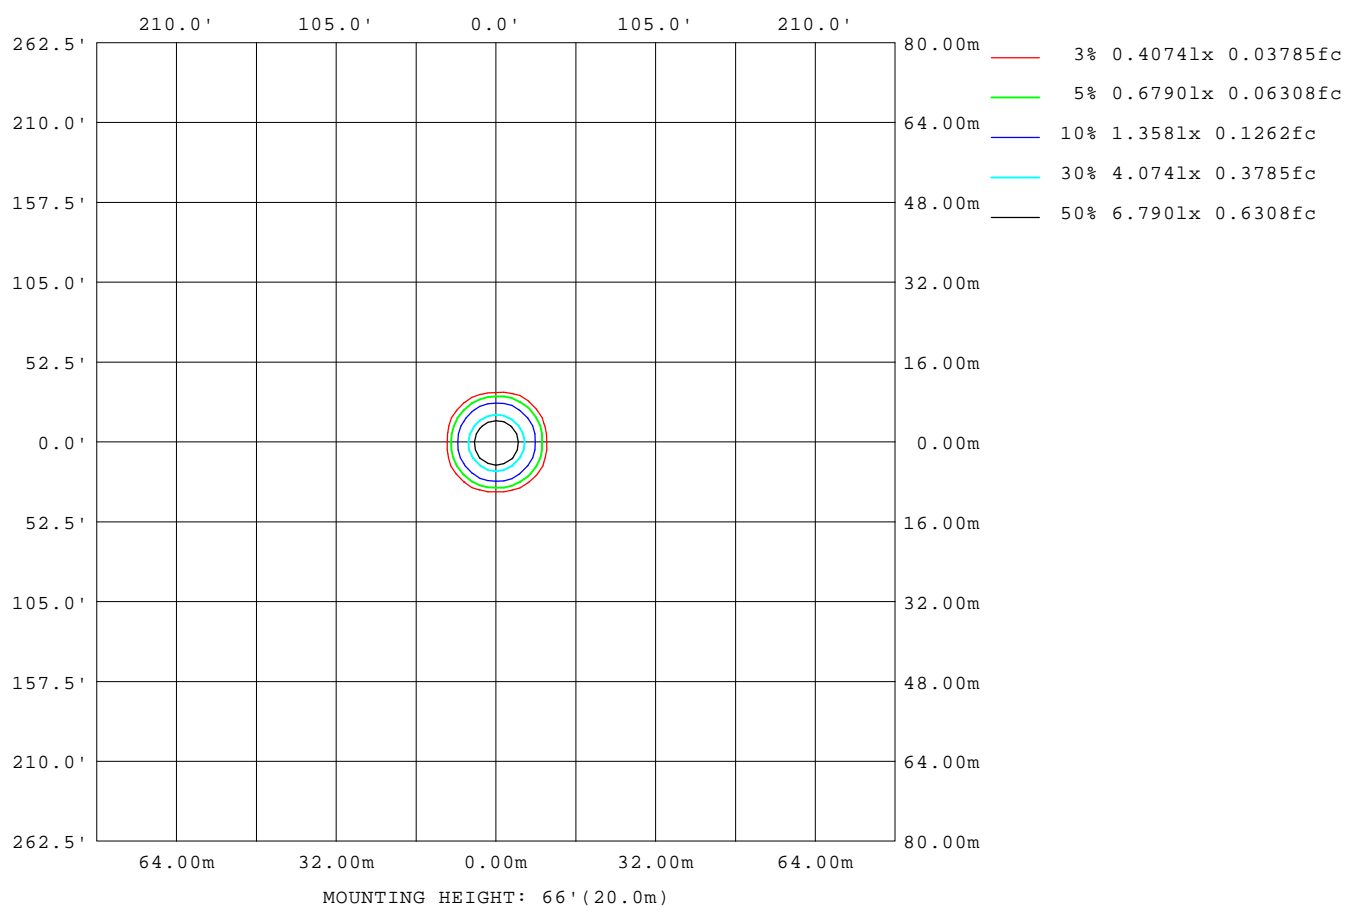

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3 °C  
Operators:zoe  
Test Date:2023-10-30

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
LENS:PM-1083 15R  
DRIVER: PUP40A-1WMC-850 600mA  
30minutes warm-up

## LED Avg.L Report

Test:U:120.16V I:0.1992A P:23.712W PF:0.9890 Freq:59.98Hz Lamp Flux:2450x1 lm		
NAME: 2318.154-ACOT-84-AM	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2310301288
MFR.: RISE	SUR.: 0.001681m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	2442
L_0~180(75)av	1458
L_0~180(85)av	1639
L_90~270(65)av	1704
L_90~270(75)av	1281
L_90~270(85)av	1766
L_45(65)av	1592
L_45(75)av	951
L_45(85)av	777

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-10-30

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
LENS:PM-1083 15R  
DRIVER: PUP40A-1WMC-850 600mA  
30minutes warm-up

## Planar Illuminance Curve

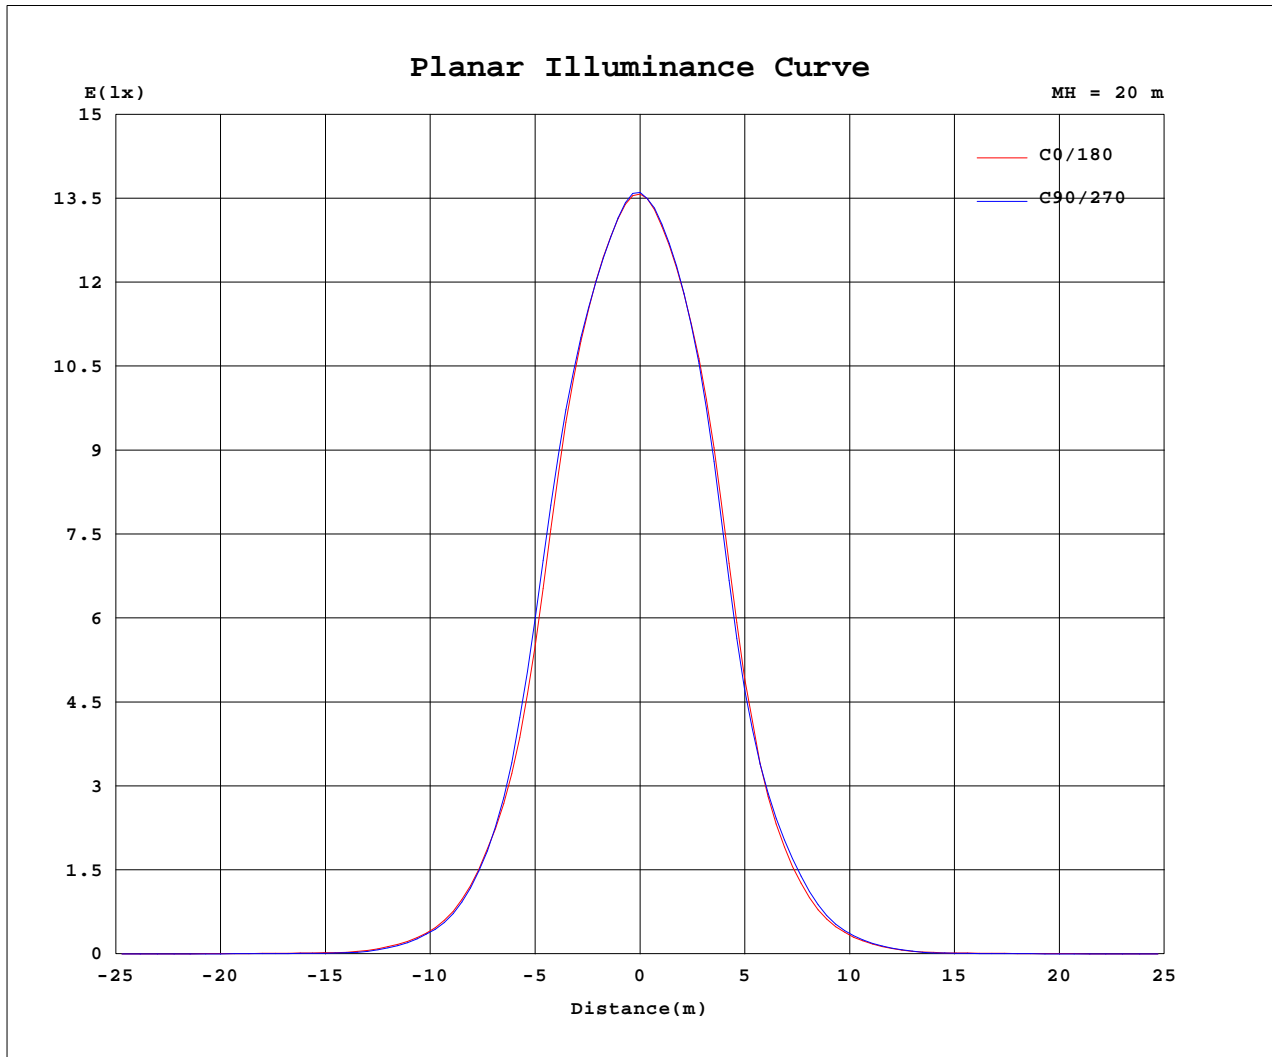

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators: zoe  
 Test Date: 2023-10-30

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: BXRE-30G2000-C-83 Ra:90  
 LENS: PM-1083 15R  
 DRIVER: PUP40A-1WMC-850 600mA  
 30minutes warm-up

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.16V I:0.1992A P:23.712W PF:0.9890 Freq:59.98Hz Lamp Flux:2450x1 lm		
NAME: 2318.154-ACOT-84-AM	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2310301288
MFR.: RISE	SUR.: 0.001681m2	Shielding Angle:

Table--1

UNIT: cd

C(DEC) (DEC)	0	30	60	90	120	150	180	210	240	270	300	330						
0	5440	5440	5440	5440	5440	5440	5440	5440	5440	5440	5440	5440						
5	5046	5048	5028	5029	5016	4994	4968	4942	4956	4972	4993	5011						
10	3985	4026	4029	4070	3999	3921	3794	3672	3661	3685	3769	3874						
15	2066	2167	2204	2239	2115	2010	1851	1733	1785	1779	1913	1958						
20	909	915	913	890	870	818	755	759	800	824	869	897						
25	323	381	366	303	350	328	264	307	314	287	361	377						
30	106	151	133	93.9	130	126	84.1	115	116	89.3	143	136						
35	24.1	46.1	37.1	19.1	38.2	38.9	21.2	36.3	35.8	16.6	45.3	43.0						
40	13.7	11.2	10.1	9.55	10.5	12.4	12.2	9.96	8.58	8.72	9.88	12.2						
45	9.14	7.30	6.50	6.21	6.96	8.61	8.16	6.31	5.52	5.32	6.15	8.47						
50	5.06	4.13	3.57	2.88	3.84	5.10	4.44	3.38	2.92	2.60	3.77	5.07						
55	3.77	2.40	2.11	2.32	2.13	2.97	3.30	1.79	1.54	1.81	1.91	3.01						
60	2.81	1.83	1.67	1.88	1.67	2.23	2.47	1.35	1.22	1.50	1.33	2.19						
65	1.84	1.29	1.21	1.37	1.21	1.52	1.63	0.92	0.87	1.06	0.94	1.39						
70	1.14	0.83	0.79	0.92	0.79	0.94	0.99	0.56	0.50	0.63	0.56	0.80						
75	0.69	0.50	0.48	0.60	0.48	0.55	0.58	0.33	0.36	0.51	0.32	0.44						
80	0.41	0.28	0.27	0.37	0.26	0.29	0.36	0.21	0.27	0.40	0.24	0.25						
85	0.25	0.11	0.10	0.21	0.10	0.12	0.23	0.14	0.17	0.30	0.15	0.14						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-10-30

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
LENS:PM-1083 15R  
DRIVER: PUP40A-1WMC-850 600mA  
30minutes warm-up