




BRANKO-A-65-RTA1



Product specification

INTERIOR RECESSED DOWNLIGHTS

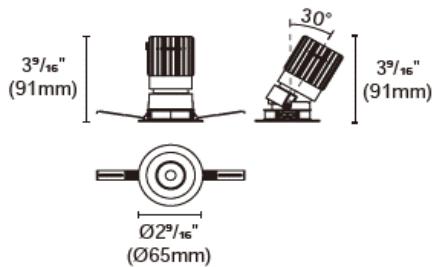

 Cut out :
 2 12/32" (60mm)

Technical Specification

Article number	2318.159-LEA-13		
----------------	-----------------	--	--

LED Consumption	10W		
-----------------	-----	--	--

Fixture Consumption	12W		
---------------------	-----	--	--

Current / Voltage	250mA / 36.5Vdc		
-------------------	-----------------	--	--

CRI	90+		
-----	-----	--	--

CCT	2700K	3000K	4000K
-----	-------	-------	-------

LED Lumen *1	871lm	913lm	981lm
--------------	-------	-------	-------

Delivered Lumen	-	-	-
-----------------	---	---	---

Beam Angle available	15°/24°/36°/50° (Lens)		
----------------------	------------------------	--	--

Driver Technical Specification (Remoted)

Driver Brand	EUCHIPS	Driver Model	PUP10T-1LMC-350
--------------	---------	--------------	-----------------


Input voltage / Freqency range	120-277Vac / 50/60Hz	Output Current / Voltage	250mA / 9-40Vdc
--------------------------------	----------------------	--------------------------	-----------------

Dimming / Flicker	Triac / Flicker-free	Certification	UL
-------------------	----------------------	---------------	----

Power Factor	>0.9	Warranty	5 years
--------------	------	----------	---------


Technical character		Materials	
Products Standard	UL1598	Luminaire	Aluminum die cast
		Trim	Aluminum die cast
Insulation	CLASS III	Optics	PMMA Lens
Protection	Damp Location	Heat sink	Forged aluminum
Tilt / Rotate	0~30° / Non	Fixture color available	white / black
Operating temperature	0~35°C		
Average Failure Time	L70(6k) >33300(h)		

Accessories

ACHO-6
Honeycomb louver

Photometric

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.

INSTALLATION OPTIONS




ACCG-28B-PUP10A-1WMC-350 0/1-10V

ACCG-28B-PUP10D-1WMC-350 DALI

ACCG-28B-PUP10T-1LMC-350 TRIAC

for BRANKO-A-65-2"

Type: Gear box

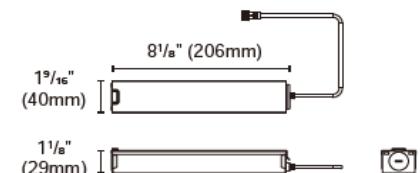


Internal space dimension:
L 4 1/4" (108mm) X W 1 3/8" (35mm) X H 1" (26mm)



ACCH-12-60 for BRANKO-A-65-2"

Type: New construction plate



Driver is secured on patent designed bracket


ACCH-12D-60-PUP10A-1WMC-350 0/1-10V

ACCH-12D-60-PUP10D-1WMC-350 DALI

ACCH-12D-60-PUP10T-1LMC-350 TRIAC

for BRANKO-A-65-2"

Type: IC Box

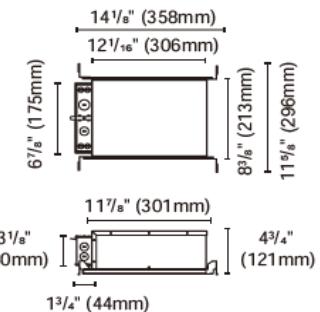

ACCI-3

Type: Emergency battery holder


For BillDa emergency led driver-

Model NO. BLD-HM08D-YYY

BLD-HM15D-YYY

BLD-HM20D-YYY

BLD-HM25D-YYY

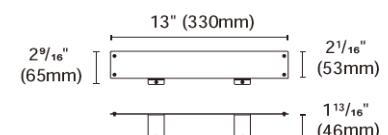

ACCI-5

Type: Remodel stand

