


Luminaire Photograph

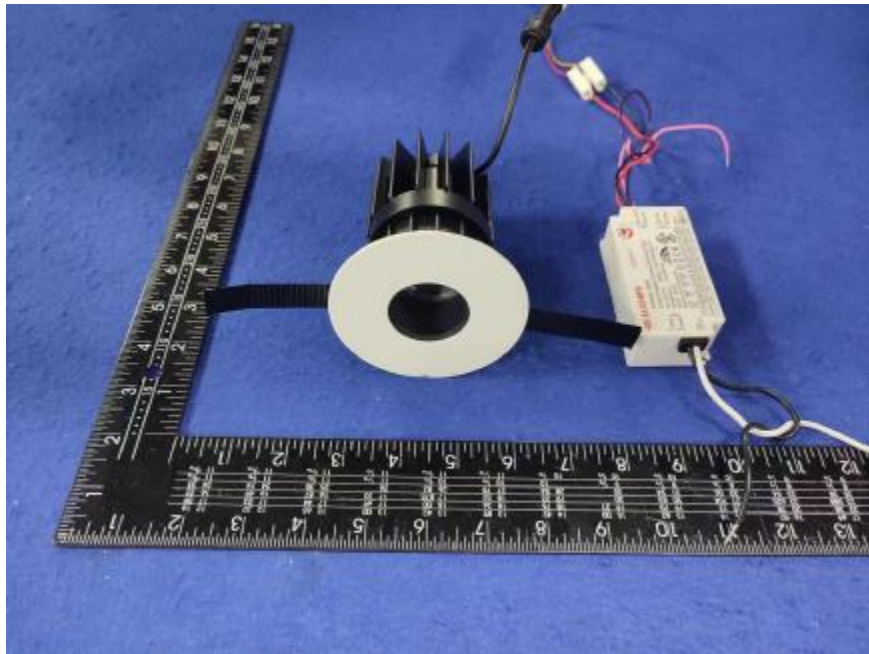

Light Output Ratio:	67.7%	
Luminaire Power:	18.8 W	
SHR Nominal:	0.50	Calculated using the TM5
SHR Maximum:	0.70	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2024-7-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRE-30G1000-A-83 Ra:90
LENS: PM-1082B 36R
DRIVER: PUP20A-1WMC 450mA
30minutes warm-up

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

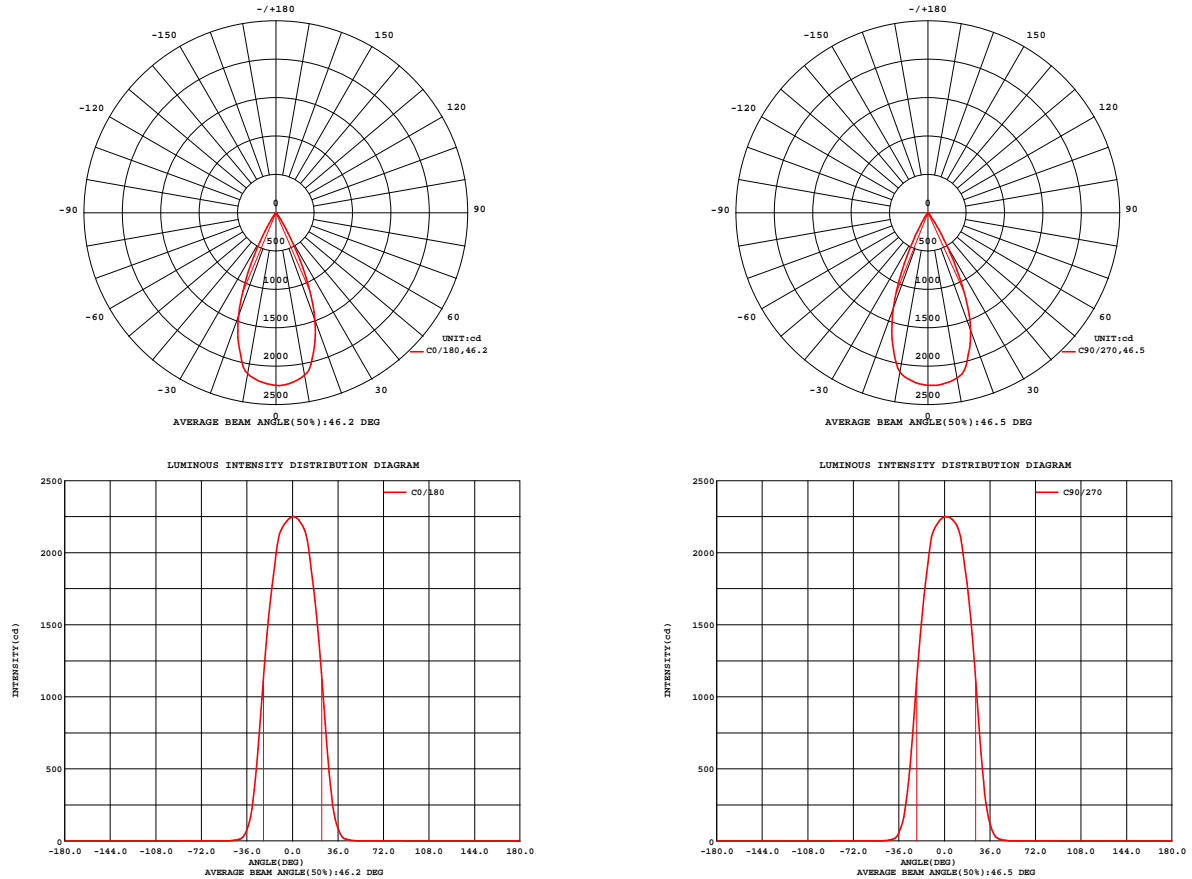


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2024-7-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRE-30G1000-A-83 Ra: 90
LENS: PM-1082B 36R
DRIVER: PUP20A-1WMC 450mA
30minutes warm-up

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.06V I:0.1574A P:18.799W PF:0.9938 Freq:59.98Hz Lamp Flux:1805.61x1 lm		
NAME: 2318.162-LEA-14	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2407180920
MFR.: RISE	SUR.: 0.00101736m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 65.00 lm/W			
MODEL	Brideglux	I _{max} (cd)	2252	S/MH(C0/180)	0.69
NOMINAL POWER(W)	18	LOR(%)	67.7	S/MH(C90/270)	0.66
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1222.0	η UP,DN(C0-180)	0.0,36.3
NOMINAL FLUX(lm)	1805.61	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,31.3
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120	η down(%)	67.7	CIBSE SHR MAX	0.70

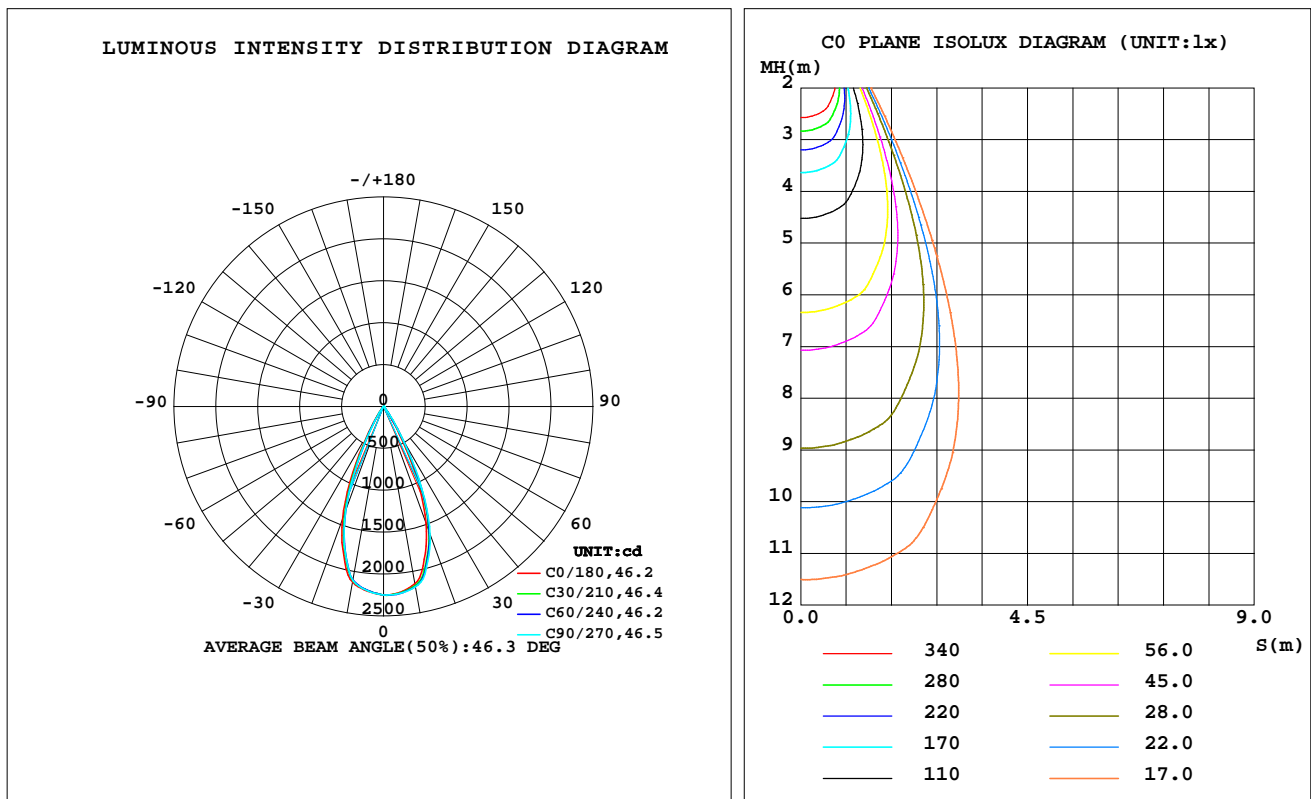

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-7-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90
LENS:PM-1082B 36R
DRIVER:PUP20A-1WMC 450mA
30minutes warm-up

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2147	2177	2185	2161	2130	2107	2109	2123	0- 10	209.6	209.6	17.2,11.6
20	1486	1593	1627	1540	1435	1337	1320	1385	10- 20	515.3	724.8	59.3,40.1
30	389.0	480.0	502.3	434.8	351.5	287.1	274.2	310.8	20- 30	404.3	1129	92.4,62.5
40	22.91	32.25	37.63	29.94	21.51	14.91	14.60	16.92	30- 40	85.68	1215	99.4,67.3
50	1.801	2.187	2.551	2.088	1.518	1.223	1.119	1.266	40- 50	6.289	1221	99.9,67.6
60	0.2475	0.2698	0.2792	0.2660	0.2299	0.2023	0.1995	0.2051	50- 60	0.5756	1222	100,67.7
70	0.1061	0.1074	0.1113	0.1072	0.1045	0.0913	0.0885	0.0864	60- 70	0.1526	1222	100,67.7
80	0.0649	0.0574	0.0664	0.0571	0.0670	0.0490	0.0479	0.0442	70- 80	0.0790	1222	100,67.7
90	0	0	0	0	0	0	0	0	80- 90	0.0379	1222	100,67.7
100	0	0	0	0	0	0	0	0	90-100	0	1222	100,67.7
110	0	0	0	0	0	0	0	0	100-110	0	1222	100,67.7
120	0	0	0	0	0	0	0	0	110-120	0	1222	100,67.7
130	0	0	0	0	0	0	0	0	120-130	0	1222	100,67.7
140	0	0	0	0	0	0	0	0	130-140	0	1222	100,67.7
150	0	0	0	0	0	0	0	0	140-150	0	1222	100,67.7
160	0	0	0	0	0	0	0	0	150-160	0	1222	100,67.7
170	0	0	0	0	0	0	0	0	160-170	0	1222	100,67.7
180	0	0	0	0	0	0	0	0	170-180	0	1222	100,67.7
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-7-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90
LENS:PM-1082B 36R
DRIVER:PUP20A-1WMC 450mA
30minutes warm-up

LUMINANCE LIMITATION CURVES

Test:U:120.06V I:0.1574A P:18.799W PF:0.9938 Freq:59.98Hz
Lamp Flux:1805.6lx1 lm

NAME: 2318.162-LEA-14

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2407180920

MFR.: RISE

SUR.: 0.00101736m2

Shielding Angle:

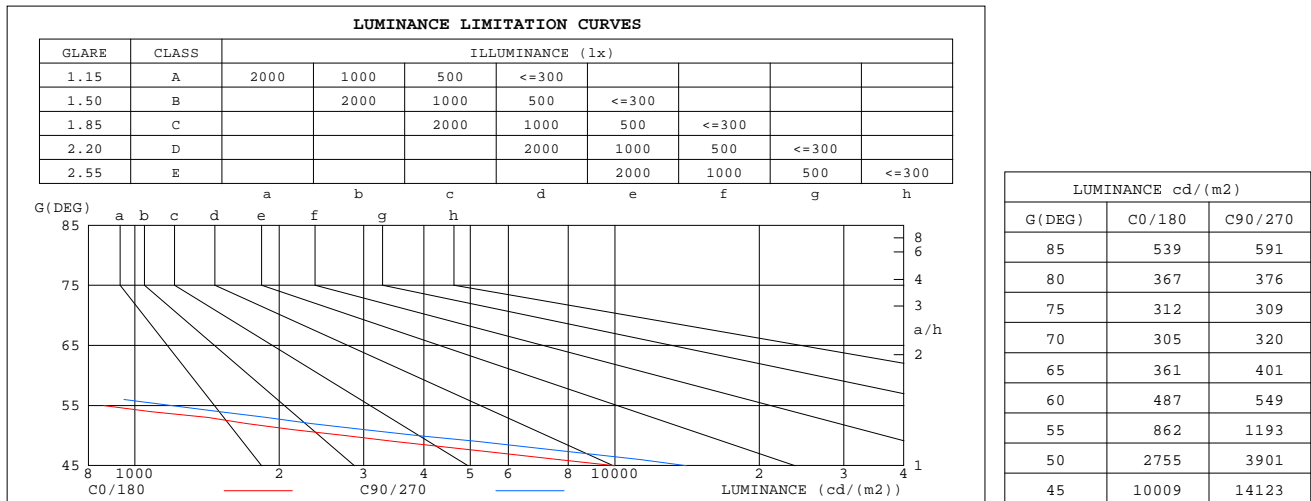

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-7-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90
LENS:PM-1082B 36R
DRIVER:PUP20A-1WMC 450mA
30minutes warm-up

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.06V I:0.1574A P:18.799W PF:0.9938 Freq:59.98Hz
Lamp Flux:1805.61lx1 lm

NAME: 2318.162-LEA-14

TYPE:

WEIGHT:

SPEC.: 3000K

DIM.:


SERIAL No.: 2407180920

MFR.: RISE

SUR.: 0.00101736m2

Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

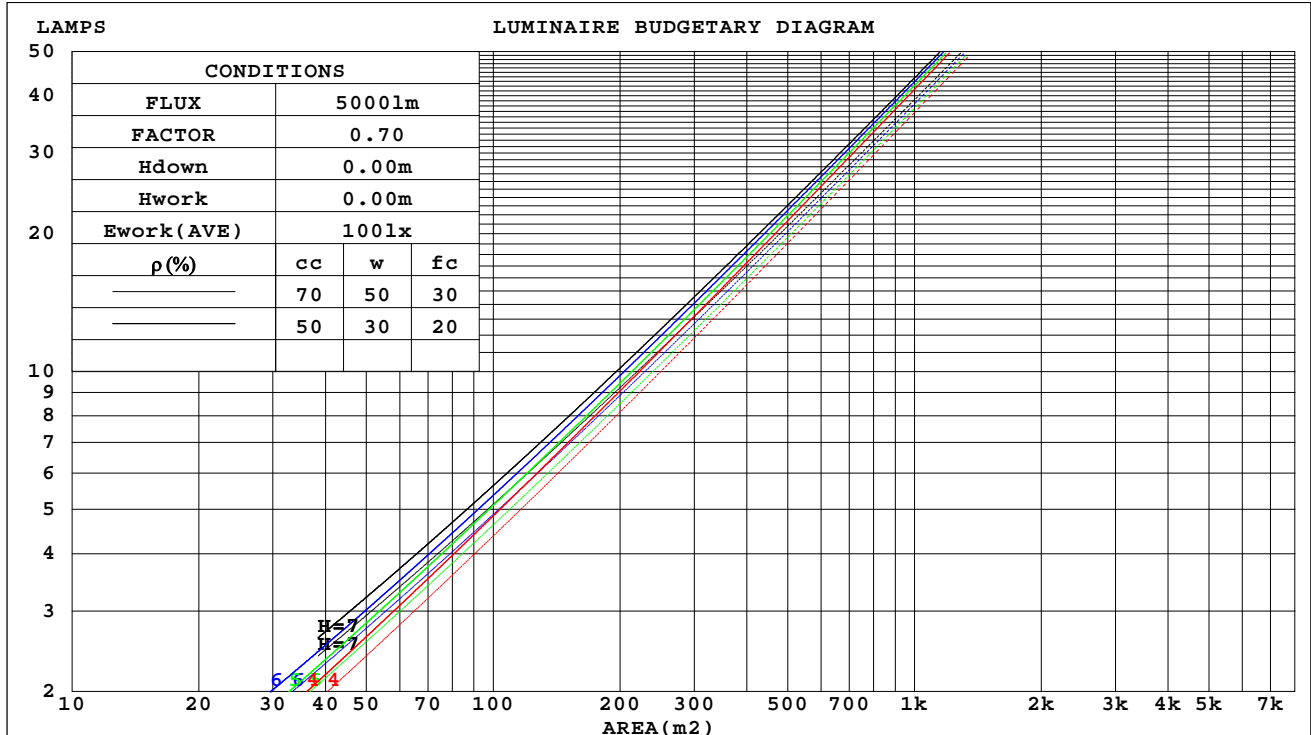

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-7-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90
LENS:PM-1082B 36R
DRIVER:PUP20A-1WMC 450mA
30minutes warm-up

WEC AND CCEC

Test:U:120.06V I:0.1574A P:18.799W PF:0.9938 Freq:59.98Hz Lamp Flux:1805.61x1 lm		
NAME: 2318.162-LEA-14	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2407180920
MFR.: RISE	SUR.: 0.00101736m2	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.104	.059	.019	.100	.057	.018	.091	.052	.017	.083	.048	.015	.076	.044	.014		
2.0	.098	.054	.016	.094	.052	.016	.087	.049	.015	.081	.045	.014	.075	.042	.013		
3.0	.093	.049	.015	.089	.048	.014	.083	.045	.014	.078	.043	.013	.073	.040	.012		
4.0	.088	.046	.013	.085	.044	.013	.080	.042	.013	.075	.040	.012	.071	.039	.012		
5.0	.083	.042	.012	.081	.042	.012	.077	.040	.012	.073	.038	.011	.069	.037	.011		
6.0	.080	.040	.011	.078	.039	.011	.074	.038	.011	.070	.037	.011	.067	.035	.010		
7.0	.076	.038	.011	.074	.037	.011	.071	.036	.010	.068	.035	.010	.065	.034	.010		
8.0	.073	.036	.010	.071	.035	.010	.068	.034	.010	.066	.033	.010	.063	.032	.009		
9.0	.070	.034	.009	.069	.034	.009	.066	.033	.009	.064	.032	.009	.061	.031	.009		
10.0	.067	.032	.009	.066	.032	.009	.064	.031	.009	.062	.031	.009	.060	.030	.009		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.129	.129	.129	.110	.110	.110	.075	.075	.075	.043	.043	.043	.014	.014	.014	
1.0	.115	.107	.099	.098	.091	.085	.067	.063	.059	.039	.036	.034	.012	.012	.011	
2.0	.103	.090	.078	.088	.077	.068	.061	.053	.047	.035	.031	.028	.011	.010	.009	
3.0	.094	.077	.063	.081	.066	.055	.055	.046	.038	.032	.027	.023	.010	.009	.007	
4.0	.086	.067	.052	.074	.057	.045	.051	.040	.032	.029	.023	.019	.009	.008	.006	
5.0	.080	.058	.043	.068	.051	.037	.047	.035	.026	.027	.021	.016	.009	.007	.005	
6.0	.074	.052	.036	.064	.045	.031	.044	.031	.022	.026	.019	.013	.008	.006	.004	
7.0	.070	.047	.030	.060	.040	.027	.041	.028	.019	.024	.017	.011	.008	.005	.004	
8.0	.066	.042	.026	.056	.037	.023	.039	.026	.016	.023	.015	.010	.007	.005	.003	
9.0	.062	.039	.023	.053	.033	.020	.037	.024	.014	.022	.014	.008	.007	.005	.003	
10.0	.059	.035	.020	.051	.031	.017	.035	.022	.012	.021	.013	.007	.007	.004	.002	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-7-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90
LENS:PM-1082B 36R
DRIVER:PUP20A-1WMC 450mA
30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:120.06V I:0.1574A P:18.799W PF:0.9938 Freq:59.98Hz Lamp Flux:1805.6lx1 lm										
NAME: 2318.162-LEA-14					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2407180920		
MFR.: RISE					SUR.: 0.00101736m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.8	16.5	16.0	16.7	16.9	16.9	17.7	17.1	17.9	18.0
3H	15.6	16.3	15.8	16.5	16.7	16.8	17.5	17.0	17.7	17.9
4H	15.5	16.2	15.8	16.4	16.6	16.7	17.4	16.9	17.6	17.8
6H	15.4	16.1	15.7	16.3	16.5	16.6	17.2	16.9	17.5	17.7
8H	15.4	16.0	15.7	16.3	16.5	16.5	17.2	16.8	17.4	17.7
12H	15.3	15.9	15.7	16.2	16.5	16.5	17.1	16.8	17.4	17.6
4H 2H	15.5	16.2	15.8	16.4	16.6	16.7	17.4	16.9	17.6	17.8
3H	15.3	15.9	15.7	16.2	16.5	16.5	17.1	16.8	17.4	17.6
4H	15.2	15.8	15.6	16.1	16.4	16.4	16.9	16.7	17.2	17.5
6H	15.1	15.6	15.5	16.0	16.3	16.3	16.8	16.7	17.1	17.5
8H	15.1	15.5	15.5	15.9	16.2	16.3	16.7	16.6	17.0	17.4
12H	15.0	15.4	15.4	15.8	16.2	16.2	16.6	16.6	17.0	17.4
8H 4H	15.1	15.5	15.5	15.9	16.2	16.3	16.7	16.6	17.0	17.4
6H	15.0	15.4	15.4	15.7	16.2	16.1	16.5	16.6	16.9	17.3
8H	14.9	15.3	15.4	15.7	16.1	16.1	16.4	16.5	16.8	17.3
12H	14.9	15.1	15.3	15.6	16.1	16.0	16.3	16.5	16.7	17.2
12H 4H	15.0	15.4	15.4	15.8	16.2	16.2	16.6	16.6	17.0	17.4
6H	14.9	15.3	15.4	15.7	16.1	16.1	16.4	16.5	16.8	17.3
8H	14.9	15.1	15.3	15.6	16.1	16.0	16.3	16.5	16.7	17.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 4.5 / -21.3					+ 4.9 / -22.3				
1.5H	+ 7.2 / -19.2					+ 7.7 / -20.2				
2.0H	+ 7.5 / - 9.4					+ 8.4 / -10.7				

CIE Pub.117, 1806 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.1)
Area: 0.00101736 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-7-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90
LENS:PM-1082B 36R
DRIVER:PUP20A-1WMC 450mA
30minutes warm-up

UTILIZATION FACTORS TABLE

Test:U:120.06V I:0.1574A P:18.799W PF:0.9938 Freq:59.98Hz Lamp Flux:1805.6lx1 lm		
NAME: 2318.162-LEA-14	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2407180920
MFR.: RISE	SUR.: 0.00101736m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	62	58	56	61	58	56	61	58	55	53
0.80	66	63	61	66	63	61	65	62	60	58
1.00	69	66	63	68	65	63	67	65	63	60
1.25	71	68	66	71	68	66	69	67	65	63
1.50	73	70	68	72	70	68	71	69	67	64
2.00	74	72	70	73	71	69	72	70	68	65
2.50	75	73	71	74	72	71	72	71	69	66
3.00	76	74	73	75	73	72	73	71	70	66
4.00	78	76	75	76	75	74	74	73	72	67
5.00	78	77	76	77	76	75	74	73	73	68
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:zoe
Test Date:2024-7-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90
LENS:PM-1082B 36R
DRIVER:PUP20A-1WMC 450mA
30minutes warm-up

ISOCANDELA DIAGRAM

Test:U:120.06V I:0.1574A P:18.799W PF:0.9938 Freq:59.98Hz Lamp Flux:1805.6lx1 lm		
NAME: 2318.162-LEA-14	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2407180920
MFR.: RISE	SUR.: 0.00101736m2	Shielding Angle:

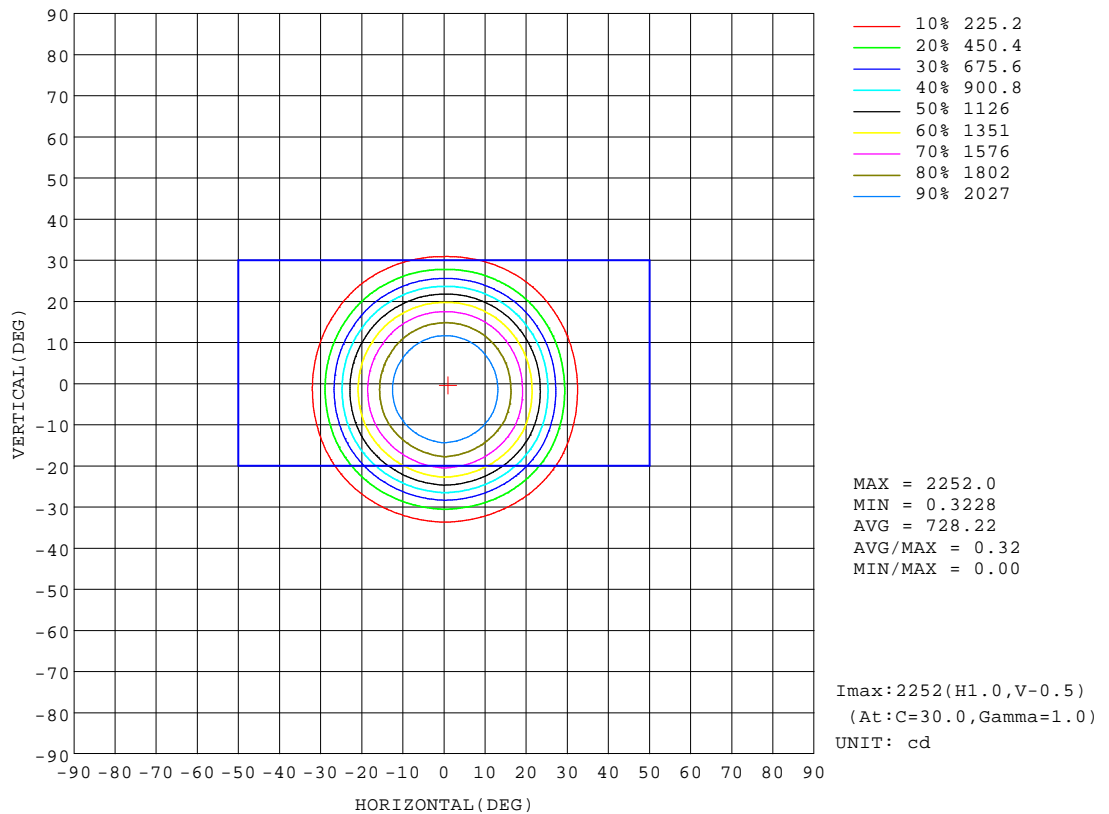


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-7-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90
LENS:PM-1082B 36R
DRIVER:PUP20A-1WMC 450mA
30minutes warm-up

AAI Figure

Test:U:120.06V I:0.1574A P:18.799W PF:0.9938 Freq:59.98Hz Lamp Flux:1805.6lx1 lm		
NAME: 2318.162-LEA-14	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2407180920
MFR.: RISE	SUR.: 0.00101736m2	Shielding Angle:

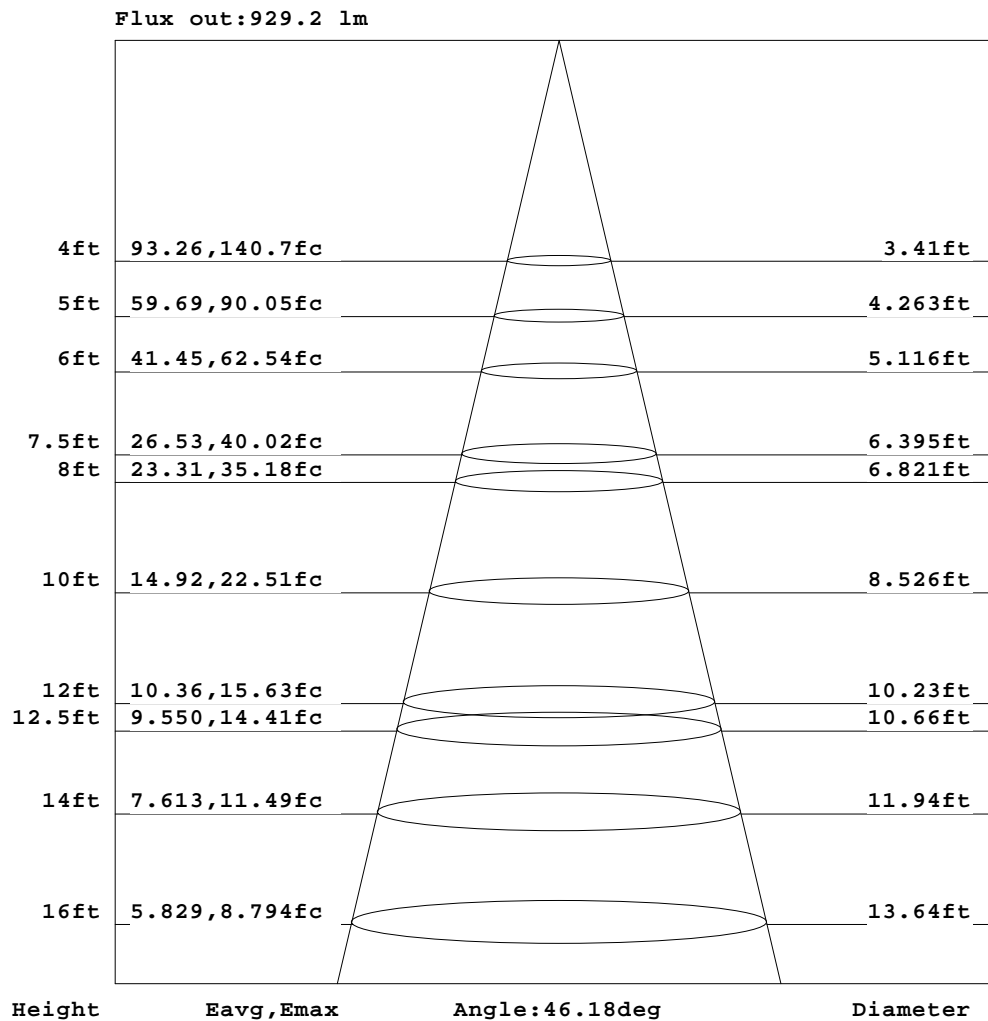


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: zoe
Test Date: 2024-7-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRE-30G1000-A-83 Ra: 90
LENS: PM-1082B 36R
DRIVER: PUP20A-1WMC 450mA
30minutes warm-up

ISOLUX DIAGRAM

Test:U:120.06V I:0.1574A P:18.799W PF:0.9938 Freq:59.98Hz Lamp Flux:1805.6lx1 lm		
NAME: 2318.162-LEA-14	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2407180920
MFR.: RISE	SUR.: 0.00101736m2	Shielding Angle:

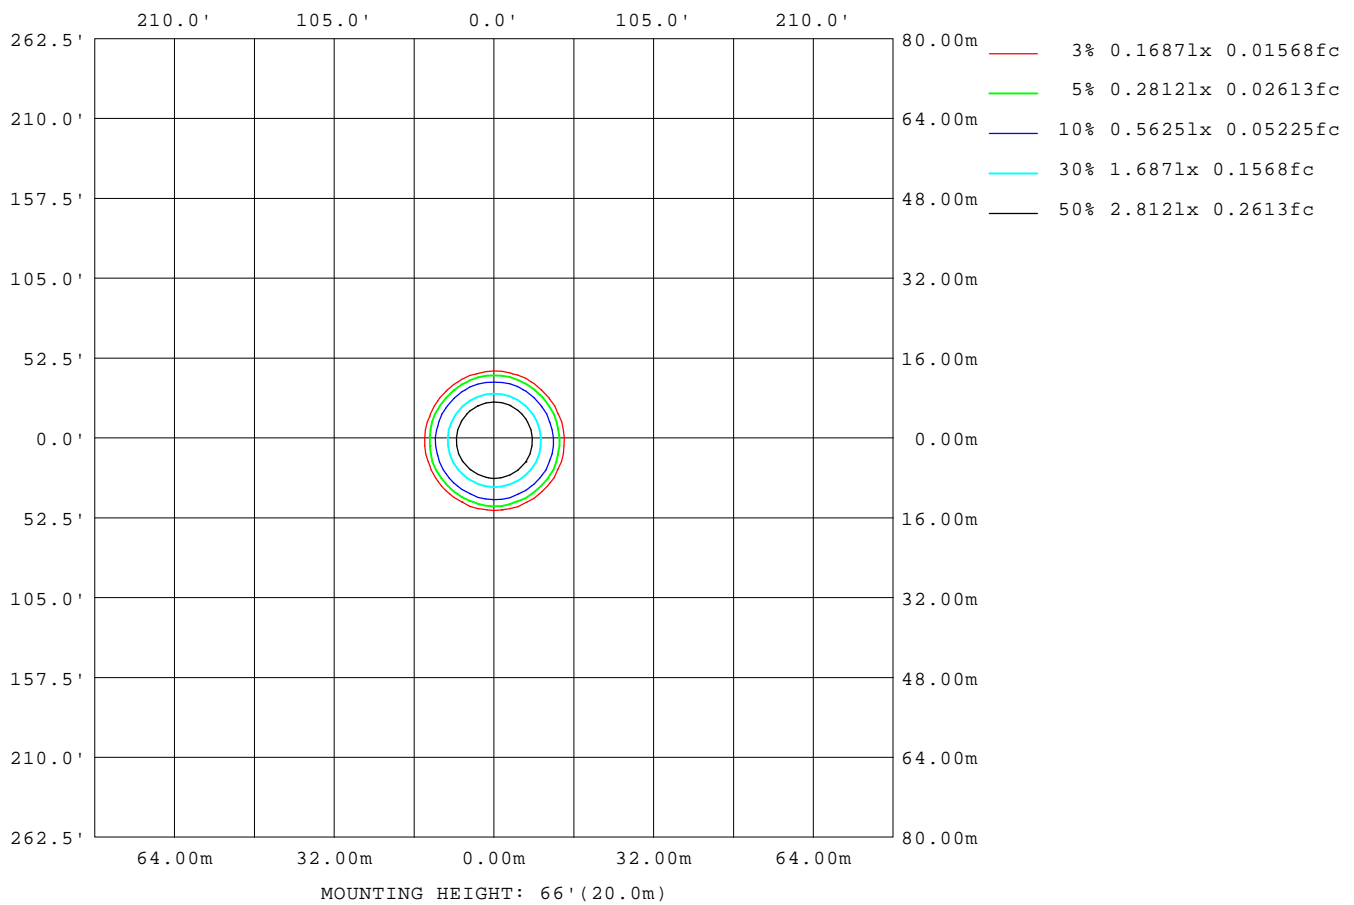

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:zoe
Test Date:2024-7-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90
LENS:PM-1082B 36R
DRIVER:PUP20A-1WMC 450mA
30minutes warm-up

LED Avg.L Report

Test:U:120.06V I:0.1574A P:18.799W PF:0.9938 Freq:59.98Hz Lamp Flux:1805.61x1 lm		
NAME: 2318.162-LEA-14	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2407180920
MFR.: RISE	SUR.: 0.00101736m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	353
L_0~180(75)av	313
L_0~180(85)av	514
L_90~270(65)av	348
L_90~270(75)av	286
L_90~270(85)av	466
L_45(65)av	338
L_45(75)av	264
L_45(85)av	328

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-7-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90
LENS:PM-1082B 36R
DRIVER:PUP20A-1WMC 450mA
30minutes warm-up

Planar Illuminance Curve

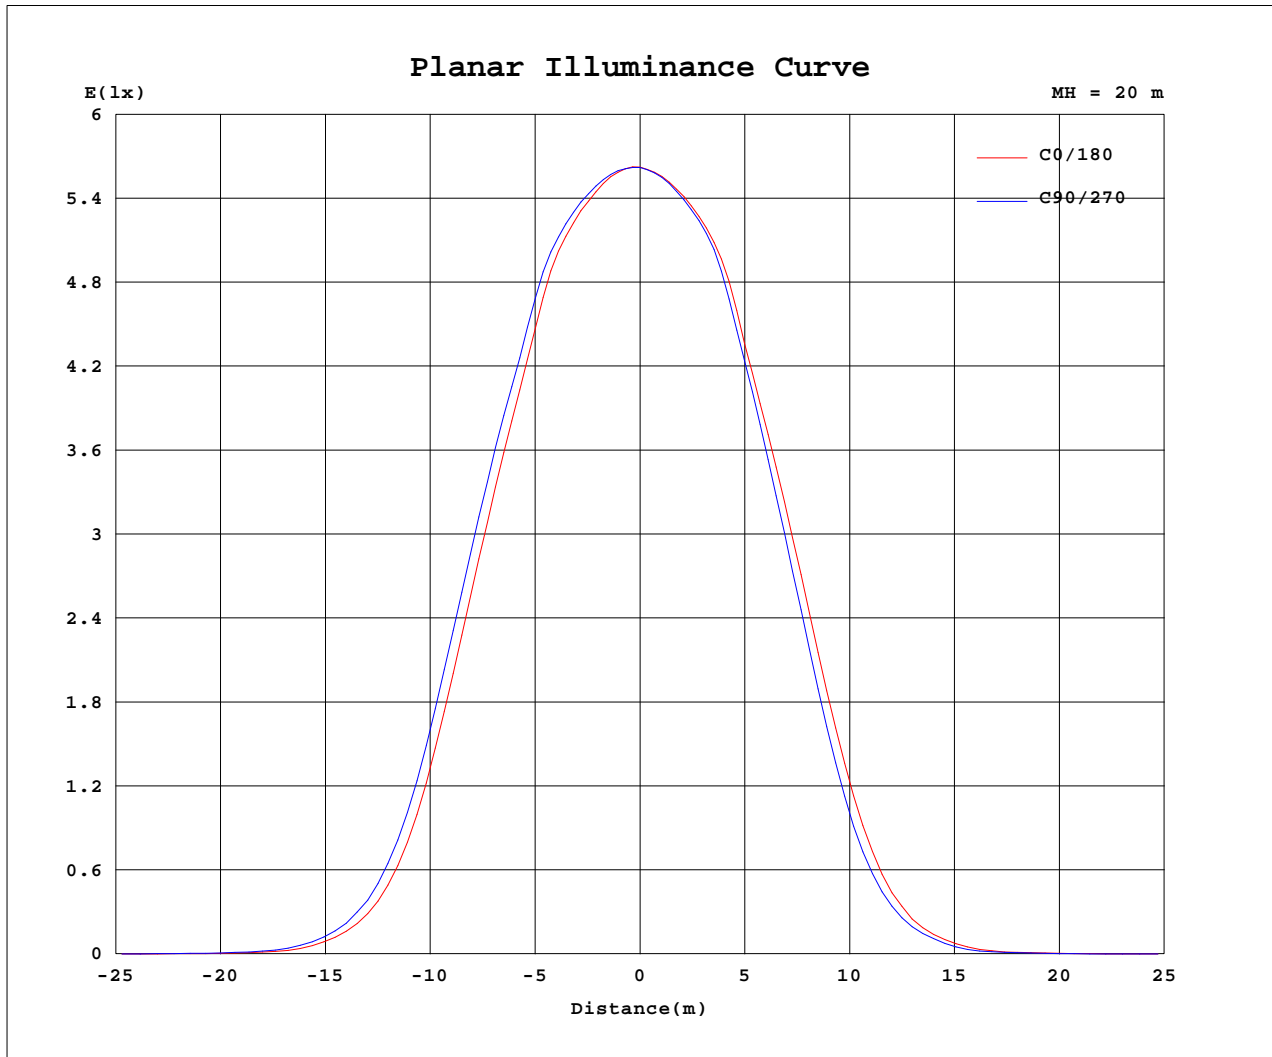

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: zoe
 Test Date: 2024-7-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: BXRE-30G1000-A-83 Ra: 90
 LENS: PM-1082B 36R
 DRIVER: PUP20A-1WMC 450mA
 30minutes warm-up



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.06V I:0.1574A P:18.799W PF:0.9938 Freq:59.98Hz Lamp Flux:1805.61x1 lm		
NAME: 2318.162-LEA-14	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2407180920
MFR.: RISE	SUR.: 0.00101736m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2249	2249	2249	2249	2249	2249	2249	2249	2249	2249	2249	2249						
5	2227	2236	2240	2239	2232	2219	2211	2203	2203	2205	2213	2218						
10	2147	2171	2182	2185	2171	2152	2130	2111	2102	2109	2118	2129						
15	1886	1947	1969	1989	1946	1902	1841	1793	1777	1783	1807	1837						
20	1486	1581	1606	1627	1565	1516	1435	1356	1318	1320	1356	1413						
25	930	1043	1067	1092	1017	960	868	778	736	734	768	832						
30	389	470	490	502	456	413	352	298	276	274	295	326						
35	118	145	153	161	143	123	103	88.2	78.5	80.5	85.0	95.2						
40	22.9	30.7	33.8	37.6	33.3	26.6	21.5	15.9	13.9	14.6	15.9	18.0						
45	7.20	8.53	8.58	10.2	9.54	7.92	5.96	4.81	3.46	4.07	4.68	5.62						
50	1.80	2.05	2.32	2.55	2.34	1.84	1.52	1.30	1.14	1.12	1.18	1.36						
55	0.50	0.54	0.68	0.70	0.64	0.51	0.44	0.38	0.36	0.35	0.36	0.41						
60	0.25	0.26	0.28	0.28	0.28	0.26	0.23	0.21	0.20	0.20	0.20	0.21						
65	0.16	0.16	0.17	0.17	0.17	0.16	0.15	0.13	0.12	0.13	0.12	0.13						
70	0.11	0.10	0.11	0.11	0.11	0.10	0.10	0.09	0.09	0.09	0.08	0.09						
75	0.08	0.07	0.08	0.08	0.08	0.07	0.08	0.07	0.07	0.07	0.06	0.06						
80	0.06	0.06	0.06	0.07	0.06	0.05	0.07	0.05	0.04	0.05	0.04	0.05						
85	0.05	0.04	0.04	0.05	0.04	0.03	0.04	0.03	0.02	0.03	0.02	0.03						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-7-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90
LENS:PM-1082B 36R
DRIVER:PUP20A-1WMC 450mA
30minutes warm-up