



BRANKO-B-65C-RTLF



Product specification

INTERIOR RECESSED DOWNLIGHTS



3 13/16" (97mm)

Cut out :
2 12/32" (60mm)

Technical Specification

Article number	2318.210F-LEA-13		
LED Consumption	10W		
Fixture Consumption	12W		
Current / Voltage	250mA / 36.5Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	871lm	913lm	981lm
Delivered Lumen	-	622lm	-
Beam Angle available	15°/24°/36°/40° (Lens)		

Driver Technical Specification (Remoted)


Driver Brand	EUCHIPS	Driver Model	PUP10A-1WMC-350
Input voltage / Frequency range	120-277Vac / 50/60Hz	Output Current / Voltage	250mA / 9-38Vdc
Dimming / Flicker	0/1-10V / Flicker-free	Certification	UL
Power Factor	>0.9	Warranty	5 years

Technical character

Products Standard	UL1598	Luminaire	Aluminum die cast
		Trimless	Aluminum die cast
Insulation	CLASS III	Optics	PMMA Lens
Protection	Wet Location	Heat sink	Forged aluminum
Tilt / Rotate	Non / Non	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	L70(6k) >33300(h)	Baffle Color available	white / black

Accessories

Photometric



ACHO-6
Honeycomb louver



ACOT-107
Suction cup

Remarks




*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.

INSTALLATION OPTIONS





ACCG-28B-PUP10A-1WMC-350 0/1-10V
ACCG-28B-PUP10D-1WMC-350 DALI
ACCG-28B-PUP10T-1LMC-350 TRIAC
 for BRANKO-A-65-2"
 Type: Gear box

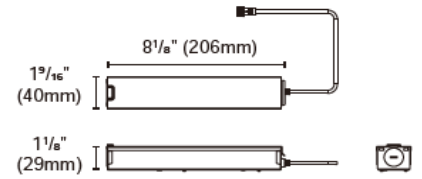


Internal space dimension:
 L 4 1/4" (108mm) X W 1 3/8" (35mm) X H 1" (26mm)



ACCH-12-60 for BRANKO-A-65-2"
 Type: New construction plate

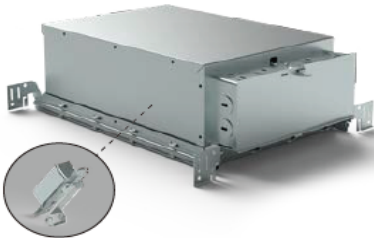


ACCH-12D-60-PUP10A-1WMC-350 0/1-10V
ACCH-12D-60-PUP10D-1WMC-350 DALI
ACCH-12D-60-PUP10T-1LMC-350 TRIAC
 for BRANKO-A-65-2"
 Type: IC Box



Driver is secured on patent designed bracket



ACCI-3
 Type: Emergency battery holder
 For BiLDa emergency led driver-
 Model NO. BLD-HM08D-YYY
 BLD-HM15D-YYY
 BLD-HM20D-YYY
 BLD-HM25D-YYY

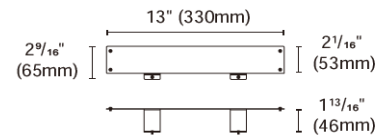

ACCI-5
 Type: Remodel stand

