


Luminaire Photograph

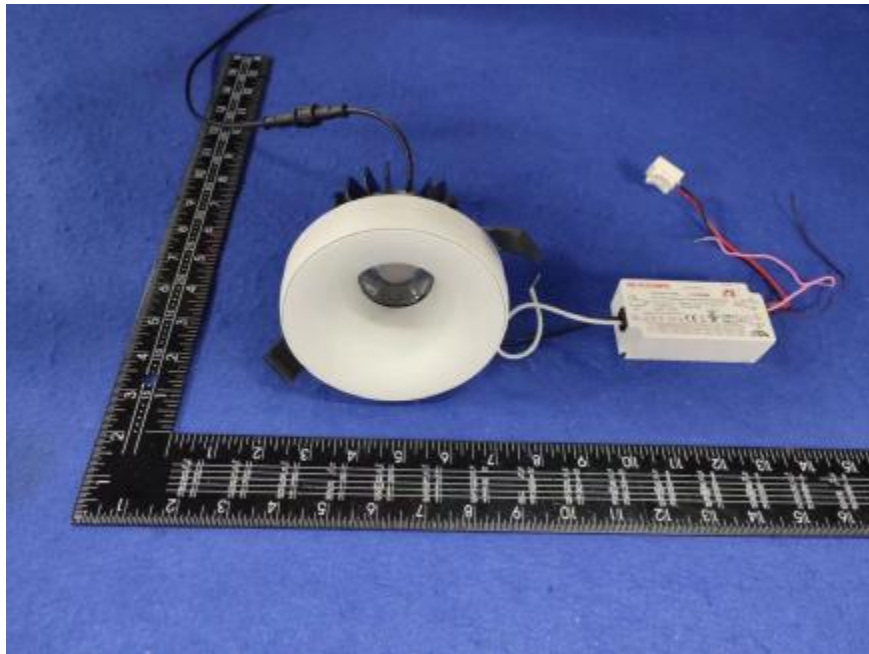

Light Output Ratio:	74.3%	
Luminaire Power:	17.58 W	
SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	0.30	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2023-11-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRV-DR-1830G-1000-K-23 Ra: 90
LENS: PM-1096 15R
DRIVER: PUP20A-1WMC 450mA
30minutes warm-up

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

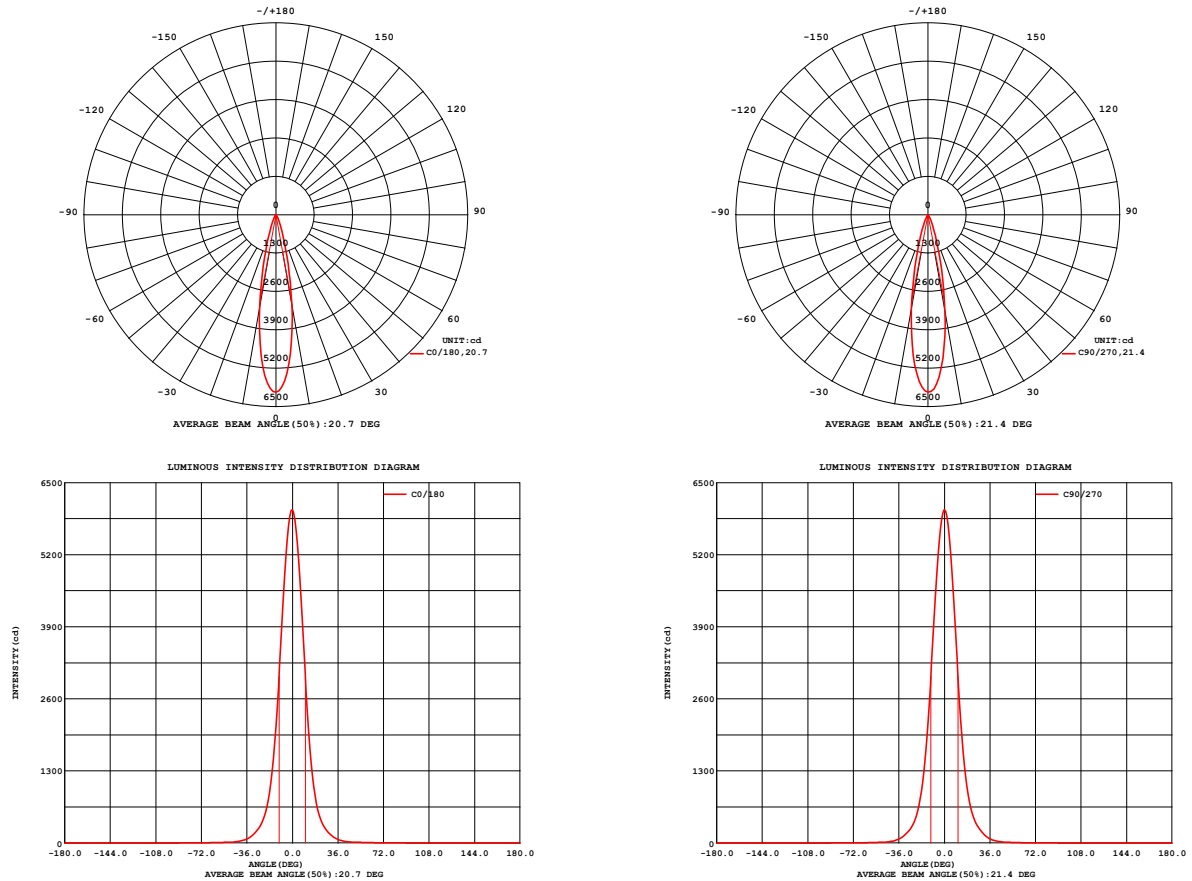


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2023-11-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRV-DR-1830G-1000-K-23 Ra: 90
LENS: PM-1096 15R
DRIVER: PUP20A-1WMC 450mA
30minutes warm-up

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.12V I:0.1472A P:17.584W PF:0.9931 Freq:59.98Hz Lamp Flux:1493.6x1 lm		
NAME: 2318.223-LEA-15-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2311011296
MFR.: RISE	SUR.: 0.00984704m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 63.08 lm/W
MODEL	Bridgelux	I _{max} (cd)	6012	S/MH (C0/180)		0.36
NOMINAL POWER (W)	17	LOR (%)	74.3	S/MH (C90/270)		0.36
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1109.2	η UP, DN (C0-180)		0.0, 37.6
NOMINAL FLUX (lm)	1493.6	CIE CLASS	DIRECT	η UP, DN (C180-360)		0.0, 36.7
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.00
TEST VOLTAGE (V)	120	η down (%)	74.3	CIBSE SHR MAX		0.30

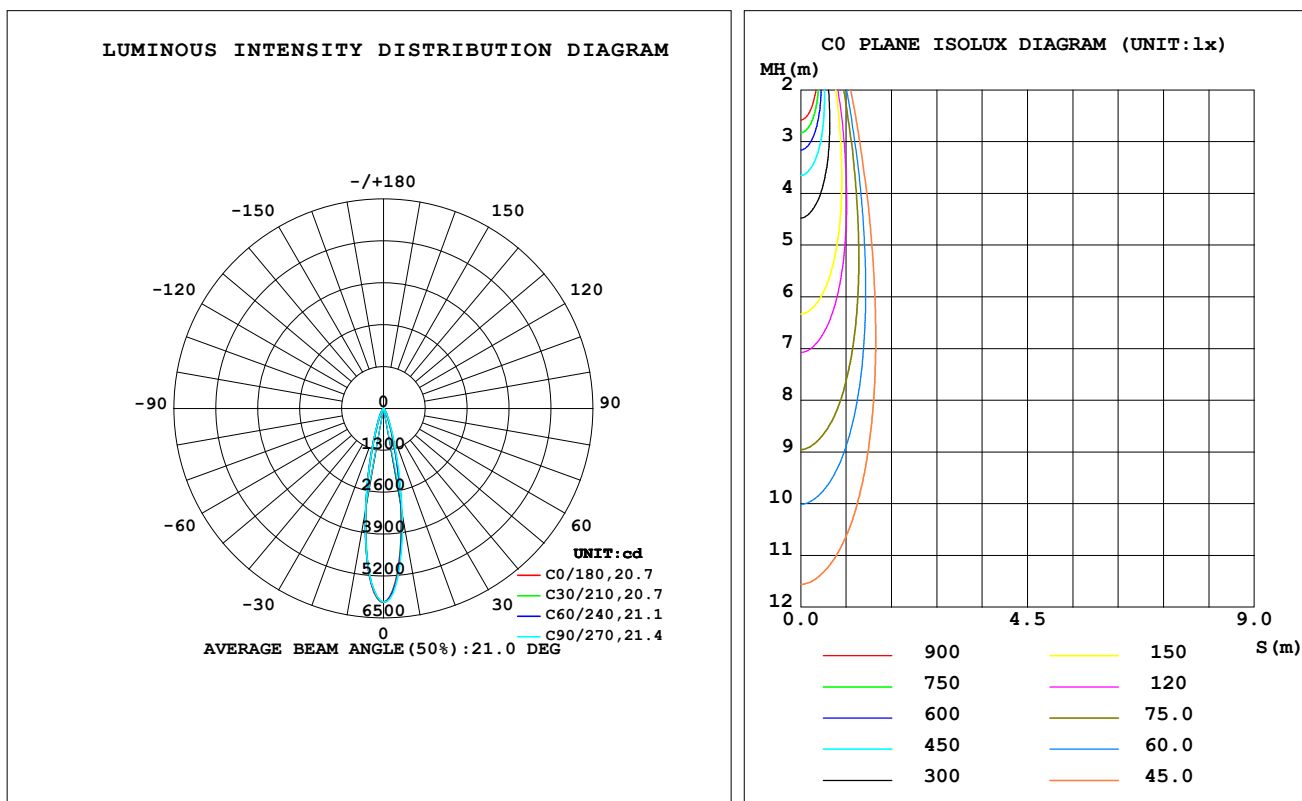

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2023-11-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRV-DR-1830G-1000-K-23 Ra: 90
LENS: PM-1096 15R
DRIVER: PUP20A-1WMC 450mA
30minutes warm-up

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	3119	3189	3344	3343	3192	3194	3245	3174	0- 10	427.7	427.7	38.6,28.6
20	610.6	649.2	731.5	718.2	659.3	645.4	675.7	636.6	10- 20	437.7	865.4	78.5,57.9
30	153.8	165.8	186.6	183.4	170.3	165.8	168.4	158.4	20- 30	156.9	1022	92.2,68.4
40	37.06	38.90	42.47	42.79	40.61	39.02	39.44	37.53	30- 40	54.86	1077	97.1,72.1
50	13.62	13.45	13.18	13.78	13.64	13.23	12.84	13.38	40- 50	17.05	1094	98.7,73.3
60	8.784	7.798	6.359	8.059	8.779	7.502	6.049	7.876	50- 60	9.563	1104	99.5,73.9
70	2.475	2.051	1.335	2.137	2.598	1.951	1.272	2.002	60- 70	4.430	1108	99.9,74.2
80	0.2837	0.1826	0.1287	0.2005	0.3026	0.1735	0.1198	0.1660	70- 80	0.8919	1109	100,74.3
90	0	0	0	0	0	0	0	0	80- 90	0.0655	1109	100,74.3
100	0	0	0	0	0	0	0	0	90-100	0	1109	100,74.3
110	0	0	0	0	0	0	0	0	100-110	0	1109	100,74.3
120	0	0	0	0	0	0	0	0	110-120	0	1109	100,74.3
130	0	0	0	0	0	0	0	0	120-130	0	1109	100,74.3
140	0	0	0	0	0	0	0	0	130-140	0	1109	100,74.3
150	0	0	0	0	0	0	0	0	140-150	0	1109	100,74.3
160	0	0	0	0	0	0	0	0	150-160	0	1109	100,74.3
170	0	0	0	0	0	0	0	0	160-170	0	1109	100,74.3
180	0	0	0	0	0	0	0	0	170-180	0	1109	100,74.3
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2023-11-1

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRV-DR-1830G-1000-K-23 Ra:90
LENS:PM-1096 15R
DRIVER: PUP20A-1WMC 450mA
30minutes warm-up

LUMINANCE LIMITATION CURVES

Test:U:120.12V I:0.1472A P:17.584W PF:0.9931 Freq:59.98Hz
Lamp Flux:1493.6x1 lm

NAME: 2318.223-LEA-15-DW

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2311011296

MFR.: RISE

SUR.: 0.00984704m2

Shielding Angle:

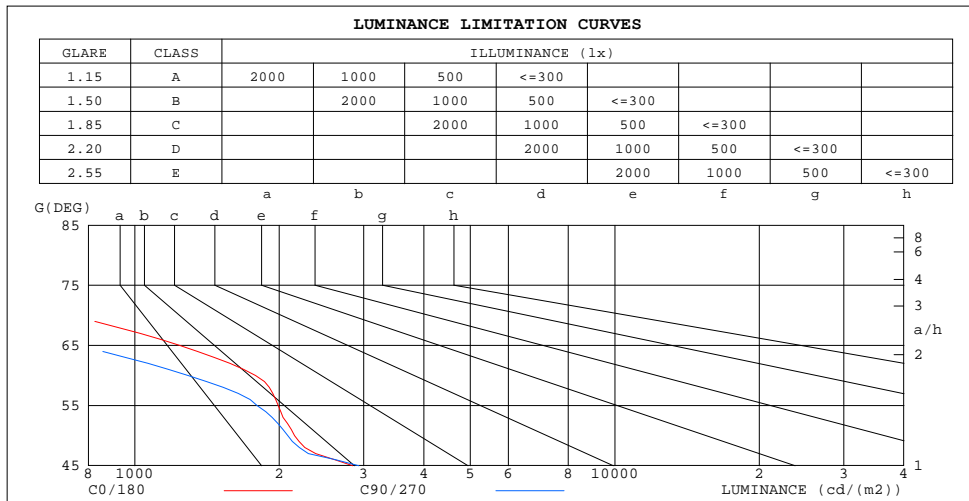

LUMINANCE cd/(m2)		
G(180)	C0/180	C90/270
85	85	52
80	166	75
75	375	187
70	735	396
65	1239	765
60	1785	1291
55	1989	1799
50	2152	2082
45	2848	2931

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2023-11-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRV-DR-1830G-1000-K-23 Ra:90
LENS:PM-1096 15R
DRIVER: PUP20A-1WMC 450mA
30minutes warm-up

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.12V I:0.1472A P:17.584W PF:0.9931 Freq:59.98Hz
Lamp Flux:1493.6x1 lm

NAME: 2318.223-LEA-15-DW

TYPE:

WEIGHT:

SPEC.: 3000K

DIM.:


SERIAL No.: 2311011296

MFR.: RISE

SUR.: 0.00984704m2

Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

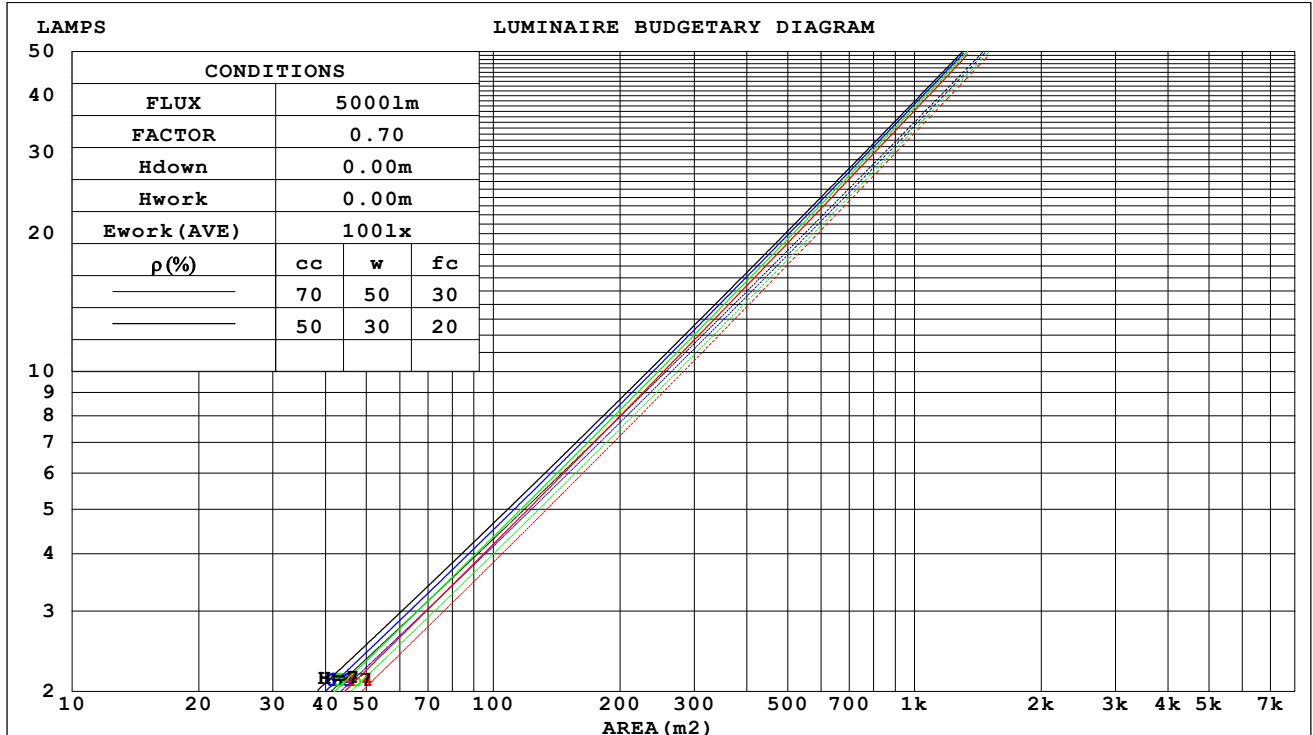

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2023-11-1

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRV-DR-1830G-1000-K-23 Ra:90
LENS:PM-1096 15R
DRIVER: PUP20A-1WMC 450mA
30minutes warm-up

WEC AND CCEC

Test:U:120.12V I:0.1472A P:17.584W PF:0.9931 Freq:59.98Hz Lamp Flux:1493.6x1 lm		
NAME: 2318.223-LEA-15-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2311011296
MFR.: RISE	SUR.: 0.00984704m2	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.103	.058	.019	.098	.056	.018	.089	.051	.016	.080	.046	.015	.072	.042	.014	
2.0	.096	.052	.016	.091	.050	.016	.084	.047	.014	.077	.043	.014	.070	.040	.013	
3.0	.089	.047	.014	.086	.046	.014	.079	.043	.013	.074	.040	.012	.068	.038	.012	
4.0	.083	.043	.013	.081	.042	.012	.075	.040	.012	.070	.038	.011	.066	.036	.011	
5.0	.079	.040	.012	.076	.039	.011	.072	.037	.011	.067	.036	.011	.063	.034	.010	
6.0	.074	.037	.011	.072	.036	.010	.068	.035	.010	.065	.034	.010	.061	.032	.010	
7.0	.070	.035	.010	.069	.034	.010	.065	.033	.009	.062	.032	.009	.059	.031	.009	
8.0	.067	.033	.009	.065	.032	.009	.062	.031	.009	.060	.030	.009	.057	.029	.009	
9.0	.064	.031	.009	.062	.030	.009	.060	.030	.008	.057	.029	.008	.055	.028	.008	
10.0	.061	.029	.008	.060	.029	.008	.058	.028	.008	.055	.027	.008	.053	.027	.008	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.141	.141	.141	.121	.121	.121	.083	.083	.083	.047	.047	.047	.015	.015	.015	
1.0	.125	.117	.110	.107	.100	.095	.073	.069	.065	.042	.040	.038	.013	.013	.012	
2.0	.112	.099	.087	.096	.085	.076	.066	.059	.053	.038	.034	.031	.012	.011	.010	
3.0	.101	.084	.071	.086	.073	.061	.059	.050	.043	.034	.029	.025	.011	.010	.008	
4.0	.091	.073	.058	.078	.063	.051	.054	.044	.036	.031	.026	.021	.010	.008	.007	
5.0	.084	.064	.049	.072	.055	.042	.049	.038	.030	.029	.023	.018	.009	.007	.006	
6.0	.077	.056	.041	.066	.049	.036	.046	.034	.025	.027	.020	.015	.009	.007	.005	
7.0	.071	.050	.035	.061	.043	.031	.042	.030	.022	.025	.018	.013	.008	.006	.004	
8.0	.067	.045	.030	.057	.039	.026	.040	.027	.019	.023	.016	.011	.007	.005	.004	
9.0	.062	.041	.026	.054	.035	.023	.037	.025	.016	.022	.015	.010	.007	.005	.003	
10.0	.059	.037	.023	.050	.032	.020	.035	.023	.014	.020	.013	.009	.007	.004	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2023-11-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRV-DR-1830G-1000-K-23 Ra:90
LENS:PM-1096 15R
DRIVER: PUP20A-1WMC 450mA
30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:120.12V I:0.1472A P:17.584W PF:0.9931 Freq:59.98Hz Lamp Flux:1493.6x1 lm										
NAME: 2318.223-LEA-15-DW					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2311011296		
MFR.: RISE					SUR.: 0.00984704m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.5	7.2	6.7	7.4	7.5	6.7	7.4	6.9	7.5	7.7
3H	6.7	7.3	6.9	7.5	7.7	6.7	7.3	6.9	7.5	7.7
4H	6.6	7.2	6.9	7.4	7.6	6.6	7.2	6.9	7.4	7.6
6H	6.6	7.1	6.8	7.3	7.6	6.5	7.1	6.8	7.3	7.5
8H	6.5	7.1	6.8	7.3	7.6	6.5	7.0	6.8	7.2	7.5
12H	6.5	7.0	6.8	7.3	7.5	6.4	6.9	6.7	7.2	7.5
4H 2H	6.6	7.1	6.8	7.3	7.6	6.7	7.3	7.0	7.5	7.7
3H	6.7	7.2	7.0	7.5	7.7	6.7	7.2	7.0	7.4	7.7
4H	6.7	7.1	7.0	7.4	7.7	6.6	7.0	6.9	7.3	7.6
6H	6.6	7.0	6.9	7.3	7.7	6.5	6.9	6.8	7.2	7.6
8H	6.5	6.9	6.9	7.3	7.6	6.4	6.8	6.8	7.2	7.5
12H	6.5	6.8	6.9	7.2	7.6	6.4	6.7	6.8	7.1	7.5
8H 4H	6.5	6.9	6.9	7.3	7.6	6.4	6.8	6.8	7.2	7.5
6H	6.4	6.8	6.9	7.1	7.6	6.3	6.7	6.8	7.0	7.5
8H	6.4	6.7	6.8	7.1	7.5	6.3	6.6	6.7	7.0	7.4
12H	6.3	6.6	6.8	7.0	7.5	6.2	6.5	6.7	6.9	7.4
12H 4H	6.5	6.8	6.9	7.2	7.6	6.4	6.7	6.8	7.1	7.5
6H	6.4	6.7	6.8	7.1	7.5	6.3	6.6	6.7	7.0	7.4
8H	6.3	6.6	6.8	7.0	7.5	6.2	6.5	6.7	6.9	7.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.8 / - 2.3					+ 2.6 / - 3.4				
1.5H	+ 3.3 / - 1.8					+ 4.3 / - 2.6				
2.0H	+ 1.3 / - 1.3					+ 2.2 / - 2.7				

CIE Pub.117, 1494 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.4)
Area: 0.00984704 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2023-11-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRV-DR-1830G-1000-K-23 Ra:90
LENS:PM-1096 15R
DRIVER: PUP20A-1WMC 450mA
30minutes warm-up

UTILIZATION FACTORS TABLE

Test:U:120.12V I:0.1472A P:17.584W PF:0.9931 Freq:59.98Hz Lamp Flux:1493.6x1 lm		
NAME: 2318.223-LEA-15-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2311011296
MFR.: RISE	SUR.: 0.00984704m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	67	62	60	66	62	60	66	62	59	57
0.80	72	68	65	71	68	65	71	67	65	62
1.00	75	71	69	74	71	68	73	71	68	65
1.25	78	74	72	77	74	71	75	73	71	68
1.50	79	76	74	79	76	74	77	75	73	70
2.00	81	78	76	80	78	76	78	76	74	71
2.50	82	80	78	81	79	77	79	77	76	71
3.00	83	81	79	82	80	78	80	78	77	72
4.00	85	83	81	83	82	80	81	79	78	73
5.00	86	84	83	84	83	82	81	80	79	74
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2023-11-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRV-DR-1830G-1000-K-23 Ra: 90
LENS: PM-1096 15R
DRIVER: PUP20A-1WMC 450mA
30minutes warm-up

ISOCANDELA DIAGRAM

Test:U:120.12V I:0.1472A P:17.584W PF:0.9931 Freq:59.98Hz Lamp Flux:1493.6x1 lm		
NAME: 2318.223-LEA-15-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2311011296
MFR.: RISE	SUR.: 0.00984704m2	Shielding Angle:

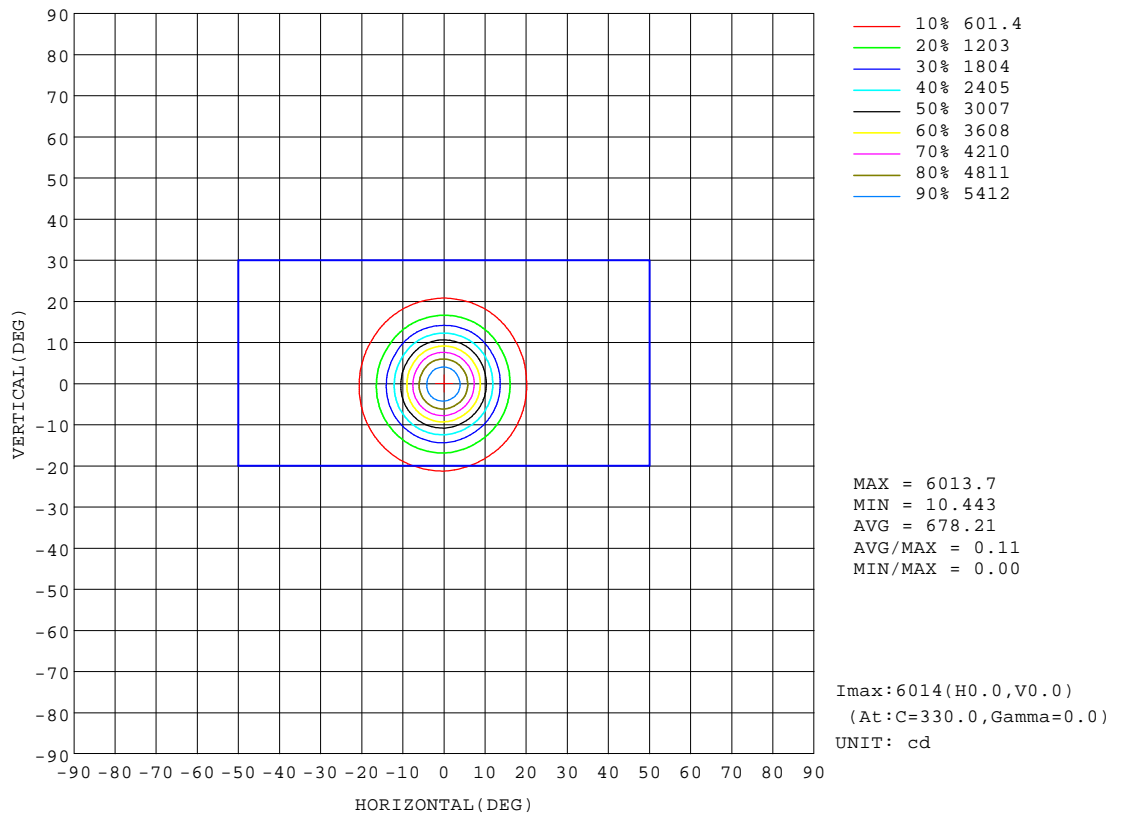


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2023-11-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRV-DR-1830G-1000-K-23 Ra:90
LENS:PM-1096 15R
DRIVER: PUP20A-1WMC 450mA
30minutes warm-up

AAI Figure

Test:U:120.12V I:0.1472A P:17.584W PF:0.9931 Freq:59.98Hz Lamp Flux:1493.6x1 lm		
NAME: 2318.223-LEA-15-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2311011296
MFR.: RISE	SUR.: 0.00984704m2	Shielding Angle:

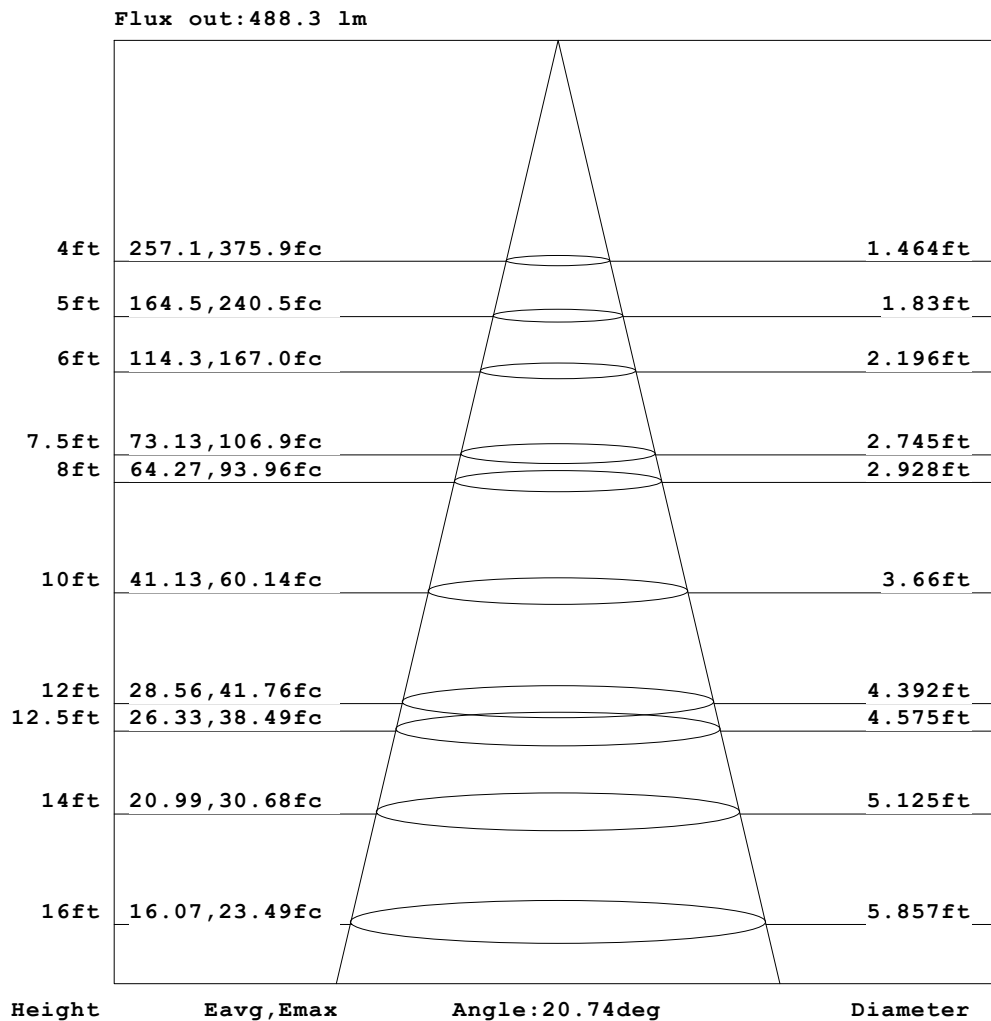


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: zoe
Test Date: 2023-11-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRV-DR-1830G-1000-K-23 Ra: 90
LENS: PM-1096 15R
DRIVER: PUP20A-1WMC 450mA
30minutes warm-up

ISOLUX DIAGRAM

Test:U:120.12V I:0.1472A P:17.584W PF:0.9931 Freq:59.98Hz Lamp Flux:1493.6x1 lm		
NAME: 2318.223-LEA-15-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2311011296
MFR.: RISE	SUR.: 0.00984704m2	Shielding Angle:

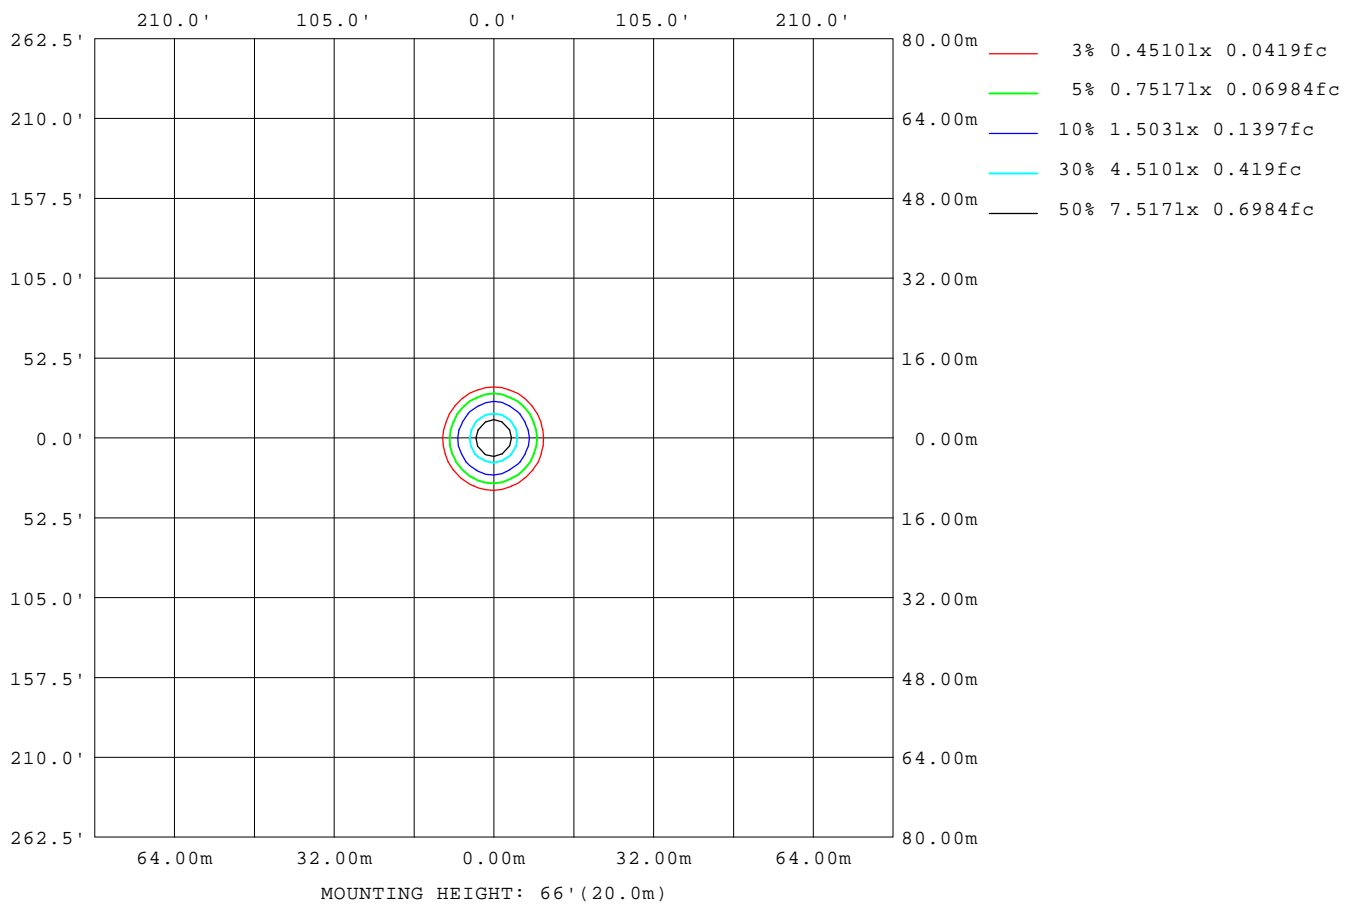

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:zoe
Test Date:2023-11-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRV-DR-1830G-1000-K-23 Ra:90
LENS:PM-1096 15R
DRIVER: PUP20A-1WMC 450mA
30minutes warm-up

LED Avg.L Report

Test:U:120.12V I:0.1472A P:17.584W PF:0.9931 Freq:59.98Hz Lamp Flux:1493.6x1 lm		
NAME: 2318.223-LEA-15-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2311011296
MFR.: RISE	SUR.: 0.00984704m2	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1253
L_0~180 (75) av	387
L_0~180 (85) av	80
L_90~270 (65) av	747
L_90~270 (75) av	178
L_90~270 (85) av	53
L_45 (65) av	1061
L_45 (75) av	285
L_45 (85) av	31

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2023-11-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRV-DR-1830G-1000-K-23 Ra:90
LENS:PM-1096 15R
DRIVER: PUP20A-1WMC 450mA
30minutes warm-up

Planar Illuminance Curve

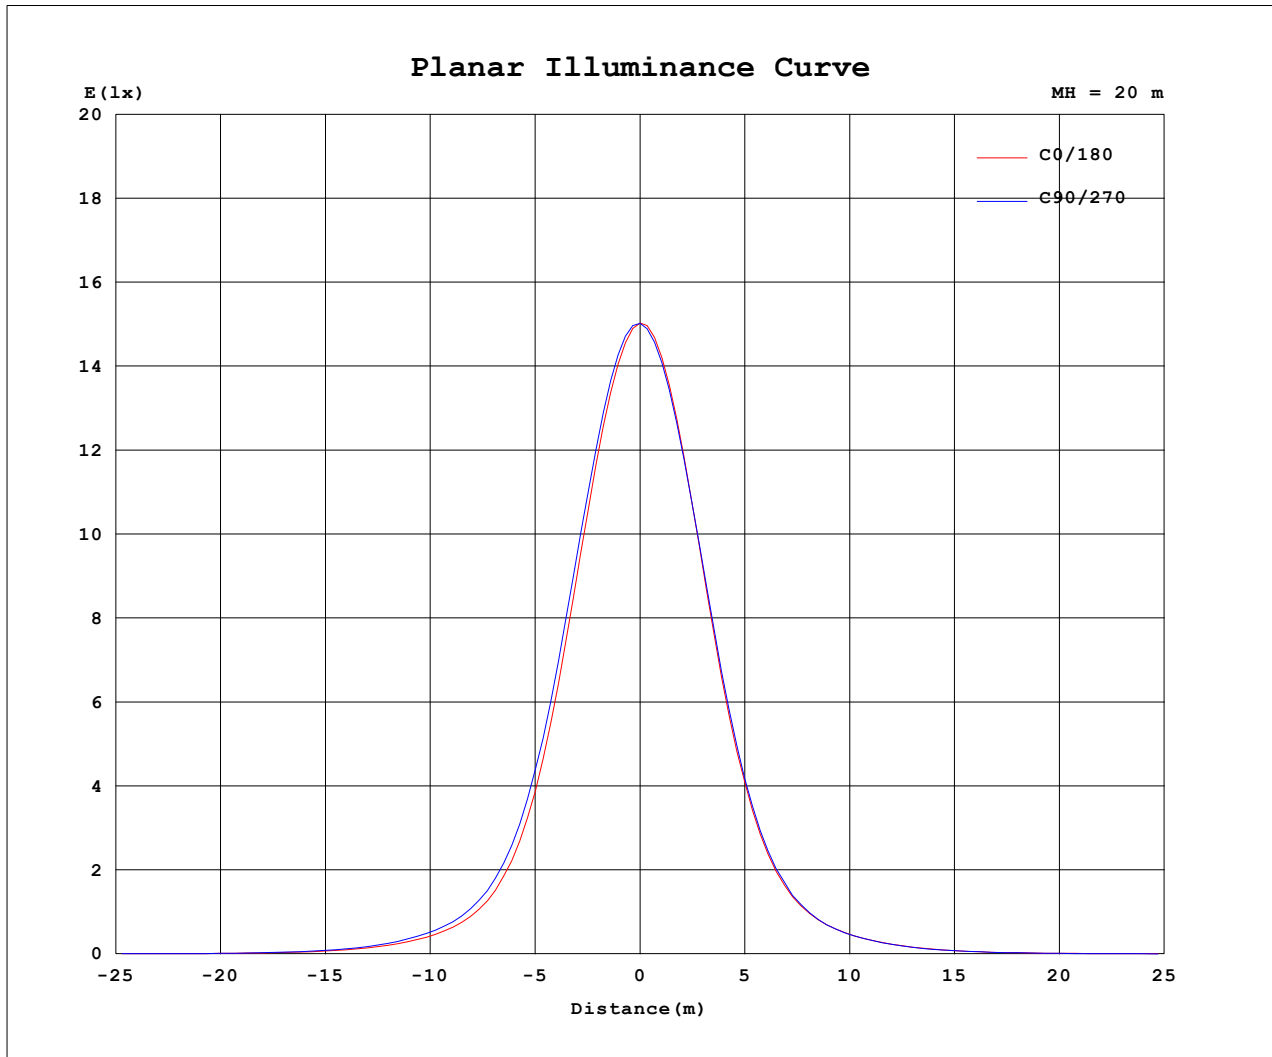

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: zoe
 Test Date: 2023-11-1

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: BXRV-DR-1830G-1000-K-23 Ra: 90
 LENS: PM-1096 15R
 DRIVER: PUP20A-1WMC 450mA
 30minutes warm-up

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.12V I:0.1472A P:17.584W PF:0.9931 Freq:59.98Hz Lamp Flux:1493.6x1 lm		
NAME: 2318.223-LEA-15-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2311011296
MFR.: RISE	SUR.: 0.00984704m2	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	6012	6012	6012	6012	6012	6012	6012	6012	6012	6012	6012	6012						
5	5089	5132	5147	5219	5247	5233	5166	5119	5151	5126	5097	5060						
10	3119	3159	3220	3344	3373	3313	3192	3152	3235	3245	3211	3136						
15	1439	1480	1523	1639	1649	1607	1522	1469	1538	1566	1553	1458						
20	611	634	665	732	733	703	659	634	657	676	661	612						
25	296	308	325	357	357	340	321	311	318	321	312	293						
30	154	161	170	187	187	180	170	164	168	168	164	153						
35	75.3	78.8	83.0	90.0	90.5	88.7	84.5	81.4	82.2	83.2	79.7	74.7						
40	37.1	38.1	39.7	42.5	43.0	42.5	40.6	38.8	39.2	39.4	38.4	36.7						
45	19.8	20.2	20.1	20.4	21.2	21.8	21.1	20.0	20.0	19.2	20.0	19.5						
50	13.6	13.7	13.2	13.2	13.6	13.9	13.6	13.4	13.0	12.8	13.3	13.5						
55	11.2	11.2	10.5	10.2	10.8	11.4	11.2	10.9	10.3	9.98	10.6	11.3						
60	8.78	8.59	7.01	6.36	7.25	8.87	8.78	8.27	6.73	6.05	7.05	8.70						
65	5.16	5.16	3.65	3.19	3.80	5.32	5.28	4.91	3.49	3.03	3.65	5.11						
70	2.47	2.51	1.59	1.34	1.67	2.60	2.60	2.40	1.50	1.27	1.56	2.44						
75	0.96	0.92	0.54	0.48	0.56	0.98	1.02	0.89	0.51	0.43	0.52	0.88						
80	0.28	0.22	0.14	0.13	0.15	0.25	0.30	0.22	0.13	0.12	0.12	0.21						
85	0.07	0.03	0.03	0.04	0.02	0.04	0.06	0.03	0.03	0.05	0.03	0.03						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2023-11-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRV-DR-1830G-1000-K-23 Ra:90
LENS:PM-1096 15R
DRIVER: PUP20A-1WMC 450mA
30minutes warm-up