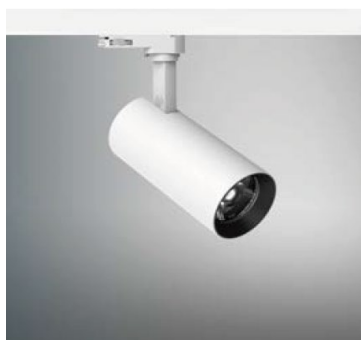
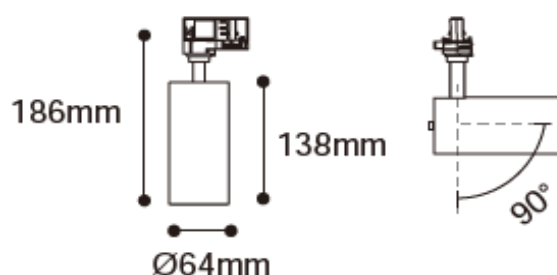



ASTER-A-64-RSP-AD3-D

Product specification
INTERIOR TRACK LIGHTS

Technical Specification

Article number	2319.200-AD3-D-350		
LED Consumption	12W		
Fixture Consumption	-		
Current / Voltage	350mA / 32.9Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	1391lm	2004lm	1538lm
Delivered Lumen	-	1342lm	-
Beam Angle available	20°/25°/38°/50°(Lens)		

Driver Technical Specification (Built-in)

Driver Brand	RMS	Driver Model	RMS-15-350AS
Input voltage / Frequency range	100-240Vac / 50/60Hz	Output Current / Voltage	350mA / 8-38Vdc
Dimming / Flicker	0-10V dimming / Free	Certification	TUV/CE
Power Factor	>0.9	Warranty	-

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	Forged aluminum
	IEC 62031	Trim	-
Insulation	CLASS II	Optics	PC Lens
Protection	IP20	Heat sink	Forged aluminum
Tilt / Rotate	0~90° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	PC
Average Failure Time	L70(10k)>55000(h)	Baffle Color available	white / black / copper / mix

Accessories


S-001
Long snoot




S-002
Asymmetrical snoot



SG-001
Striped glass



H-001
Honeycomb louver

Photometric


h(m)	D(m)	E(lx)
38°		
1.0	0.70	3175
2.0	1.39	793
3.0	2.09	352
4.0	2.78	198
5.0	3.48	127

Remarks


*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.