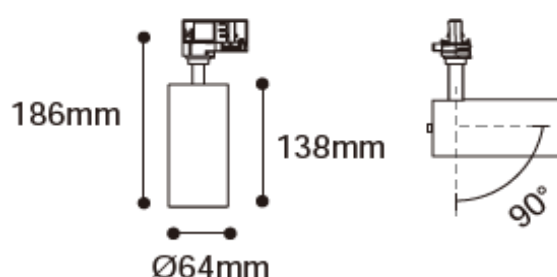



ASTER-A-64-RSP-AD3-D
Product specification

INTERIOR TRACK LIGHTS

Technical Specification

Article number	2319.200-AD3-D-500		
LED Consumption	17W		
Fixture Consumption	20W		
Current / Voltage	500mA / 34.1Vdc		
CRI	95+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	1917lm	1815lm	2120lm
Delivered Lumen	-	1860lm	-
Beam Angle available	20°/25°/38°/50°(Lens)		

Driver Technical Specification (Built-in)

Driver Brand	RMS	Driver Model	RMS-20-500AS
Input voltage / Frequency range	100-240Vac / 50/60Hz	Output Current / Voltage	500mA / 8-38Vdc
Dimming / Flicker	0-10V dimming / Free	Certification	TUV / CE
Power Factor	>0.9	Warranty	-

Technical character		Materials	
Products Standard	IEC 60598-1 60598-2-1	Luminaire	Aluminum
	IEC 62031	Trim	-
Insulation	CLASS III	Optics	PMMA Lens
Protection	IP20	Heat sink	Forged aluminum
Tilt / Rotate	0~90° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	L70(10k)>55000(h)	Baffle Color available	white / black / copper / mix

Accessories


S-001
Long snoot




S-002
Asymmetrical snoot



SG-001
Striped glass



H-001
Honeycomb louver

Photometric


h(m)	D(m)	E(lx)
25°		
1.0	0.42	8616
2.0	0.84	2154
3.0	1.25	957
4.0	1.67	538
5.0	2.09	344

Remarks


*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.