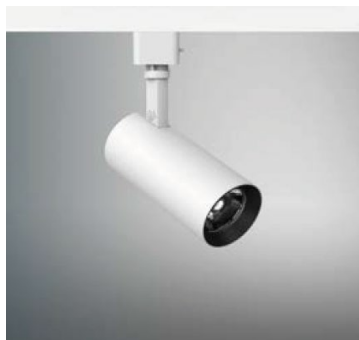
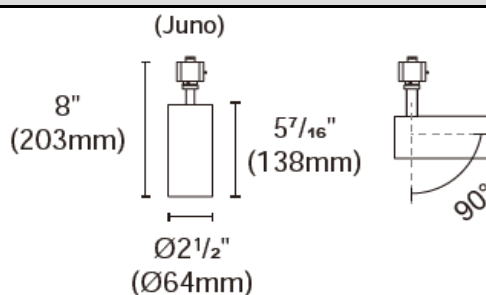



ASTER-A-64-RSP-J2AM
Product specification

INTERIOR TRACK LIGHTS

Technical Specification

Article number	2319.200-J2AM-500		
LED Consumption	17W		
Fixture Consumption	20W		
Current / Voltage	500mA / 34.1Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	1917lm	2004lm	2120lm
Delivered Lumen	-	1860lm	-
Beam Angle available	20°/24°/36°/60°(Lens)		

Driver Technical Specification (Built-in)

Driver Brand	RISE	Driver Model	TDI018NA050EF
Input voltage / Frequency range	120Vac / 50/60Hz	Output Current / Voltage	500mA / 32-38Vdc
Dimming / Flicker	Triac dimming / Free	Certification	ETL
Power Factor	>0.9	Warranty	-

Technical character

Products Standard	UL1574
	-
Insulation	CLASS III
Protection	IP20
Tilt / Rotate	0~90° / 0~355°
Operating temperature	0~35°C
Average Failure Time	L70(10k)>55000(h)



Materials

Luminaire	Aluminum
Trim	-
Optics	PMMA Lens
Heat sink	Forged aluminum
Fixture color available	white / black
Baffle	Aluminum die cast
Baffle Color available	white / black / copper

Accessories

 S-001
snoot

 S-002
Asymmetrical snoot

 SG-001
Striped glass

 H-001
Honeycomb louver


h (m)	D (m)	E (lx)
25°		
1.0	0.42	8616
2.0	0.84	2154
3.0	1.25	957
4.0	1.67	538
5.0	2.09	344

Remarks


*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.