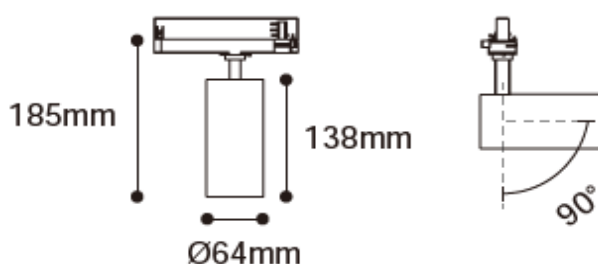



ASTER-A-64-RSP-UA-700
Product specification

INTERIOR TRACK LIGHTS

Technical Specification

Article number	2319.200-UA-700		
LED Consumption	25W		
Fixture Consumption	-		
Current / Voltage	700mA / 35.5Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	2565lm	2681lm	2837lm
Delivered Lumen	-	2416lm	-
Beam Angle available	15°/24°/36°/60°(Lens)		

Driver Technical Specification (Built-in)

Driver Brand	Vossloh-Schwabe	Driver Model	ECXe 1050.646
Input voltage / Frequency range	220-240Vac / 50/60Hz	Output Current / Voltage	700mA / 9-42Vdc
Dimming / Flicker	Non / Free	Certification	ENEC/CE
Power Factor	>0.9	Warranty	5years

Technical character

Products Standard	IEC 60598-1
	IEC 62031
Insulation	CLASS II
Protection	IP20
Tilt / Rotate	0~90° / 0~355°
Operating temperature	0~35°C
Average Failure Time	L70(10k)>55000(h)

Materials

Luminaire	Forged aluminum
Trim	-
Optics	PC Lens
Heat sink	Forged aluminum
Fixture color available	white / black
Baffle	PC
Baffle Color available	white / black / copper / mix

Accessories


S-001
Long snoot




S-002
Asymmetrical snoot



SG-001
Striped glass



H-001
Honeycomb louver



h(m)	D(m)	E(lx)
38°		
1.0	0.71	5385
2.0	1.42	1346
3.0	2.14	598
4.0	2.85	336
5.0	3.56	215

Remarks


*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.