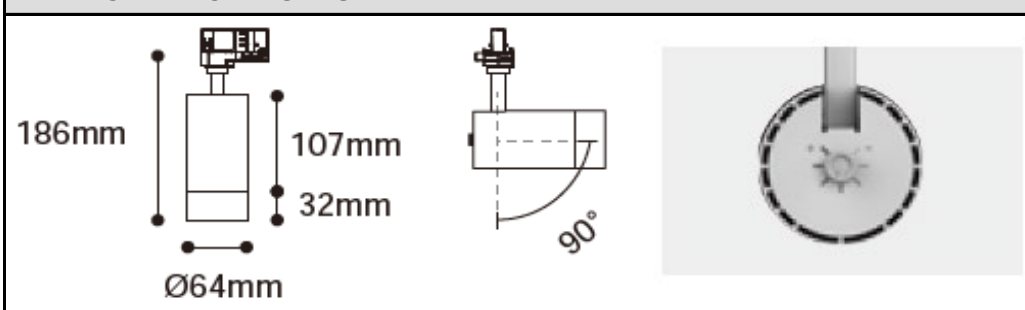



**ASTER-B-64-RSP-AD3**

**Product specification**
**INTERIOR TRACK LIGHTS**

**Technical Specification**

|                         |                       |        |
|-------------------------|-----------------------|--------|
| Article number          | 2319.201-AD3-D-350    |        |
| LED Consumption         | 12W                   |        |
| Fixture Consumption     | -                     |        |
| Current / Voltage       | 350mA / 32.9Vdc       |        |
| CRI                     | 95+                   |        |
| CCT                     | 2700K                 | 3000K  |
| LED Lumen <sup>*1</sup> | 1233lm                | 1317lm |
| Delivered Lumen         | -                     | 1185lm |
| Beam Angle available    | 20°/25°/38°/50°(Lens) |        |

**Driver Technical Specification (Built-in)**

|                                 |                      |                          |                 |
|---------------------------------|----------------------|--------------------------|-----------------|
| Driver Brand                    | RMS                  | Driver Model             | RMS-15-350AS    |
| Input voltage / Frequency range | 100-240Vac / 50/60Hz | Output Current / Voltage | 350mA / 8-38Vdc |
| Dimming / Flicker               | 0-10V dimming / Free | Certification            | TUV/CE          |
| Power Factor                    | >0.9                 | Warranty                 | -               |

| Technical character   |                   | Materials               |                              |
|-----------------------|-------------------|-------------------------|------------------------------|
| Products Standard     | IEC 60598-1       | Luminaire               | Forged aluminum              |
|                       | IEC 62031         | Trim                    | -                            |
| Insulation            | CLASS II          | Optics                  | PC Lens                      |
| Protection            | IP20              | Heat sink               | Forged aluminum              |
| Tilt / Rotate         | 0~90° / 0~355°    | Fixture color available | white / black                |
| Operating temperature | 0~35°C            | Baffle                  | PC                           |
| Average Failure Time  | L70(10k)>55000(h) | Baffle Color available  | white / black / copper / mix |

**Accessories**


S-004  
Long snoot



S-005  
Asymmetrical snoot




SG-003  
Oval Snoot



H-001  
Honeycomb louver



DS-001  
Beam mixed and eliminate  
the corona effect

**Photometric**


| h (m) | D (m) | E (lx) |
|-------|-------|--------|
| 38°   |       |        |
| 1.0   | 0.92  | 1719   |
| 2.0   | 1.84  | 429    |
| 3.0   | 2.77  | 190    |
| 4.0   | 3.69  | 107    |
| 5.0   | 4.61  | 68     |

**Remarks**


\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.