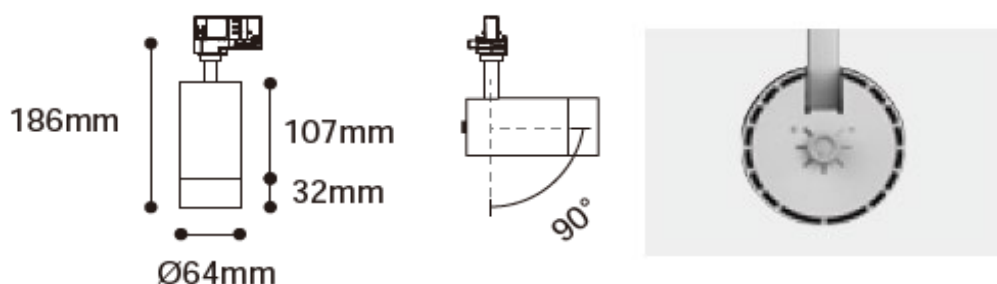



ASTER-B-64-RSP-AD3

Product specification
INTERIOR TRACK LIGHTS

Technical Specification

Article number	2319.201-AD3-D-500	
LED Consumption	17W	
Fixture Consumption	20W	
Current / Voltage	500mA / 34.1Vdc	
CRI	95+	
CCT	2700K	3000K
LED Lumen ^{*1}	1699lm	1815lm
Delivered Lumen	-	1660lm
Beam Angle available	20°/25°/38°/50°(Lens)	

Driver Technical Specification (Built-in)

Driver Brand	RMS	Driver Model	RMS-20-500AS
Input voltage / Frequency range	100-240Vac / 50/60Hz	Output Current / Voltage	500mA / 8-38Vdc
Dimming / Flicker	0-10V dimming / Free	Certification	TUV / CE
Power Factor	>0.9	Warranty	-

Technical character		Materials	
Products Standard	IEC 60598-1 60598-2-1	Luminaire	Aluminum
	IEC 62031	Trim	-
Insulation	CLASS III	Optics	PMMA Lens
Protection	IP20	Heat sink	Forged aluminum
Tilt / Rotate	0~90° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	L70(10k)>55000(h)	Baffle Color available	white / black / copper / mix

Accessories


S-004
Long snoot



S-005
Asymmetrical snoot




SG-003
Oval Snoot



H-001
Honeycomb louver



DS-001
Beam mixed and eliminate
the corona effect

Photometric


h (m)	D (m)	E (lx)
38°		
1.0	0.69	4063
2.0	1.38	1016
3.0	2.07	451
4.0	2.76	253
5.0	3.45	162

Remarks


IP20



90°



355°

*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.