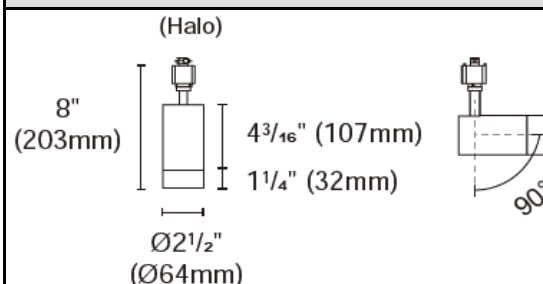



ASTER-B-64-RSP-H3AM
Product specification

INTERIOR TRACK LIGHTS

Technical Specification

Article number	2319.201-H3AM-500	
LED Consumption	17W	
Fixture Consumption	20W	
Current / Voltage	500mA / 34.1Vdc	
CRI	95+	
CCT	2700K	3000K
LED Lumen ^{*1}	1699lm	1815lm
Delivered Lumen	-	1660lm
Beam Angle available	20°/24°/36°/60°(Lens)	

Driver Technical Specification (Built-in)

Driver Brand	RISE	Driver Model	TDI018NA050EF
Input voltage / Frequency range	120Vac / 50/60Hz	Output Current / Voltage	500mA / 32-38Vdc
Dimming / Flicker	Triac dimming / Free	Certification	ETL
Power Factor	>0.9	Warranty	-

Technical character

Products Standard	UL1574
	-
Insulation	CLASS III
Protection	IP20
Tilt / Rotate	0~90° / 0~355°
Operating temperature	0~35°C
Average Failure Time	L70(10k)>55000(h)

Materials

Luminaire	Aluminum
Trim	-
Optics	PMMA Lens
Heat sink	Forged aluminum
Fixture color available	white / black
Baffle	Aluminum die cast
Baffle Color available	white / black / copper

Accessories


S-004
Long snoot




S-005
Asymmetrical snoot



SG-003
Oval Snoot



H-001
Honeycomb louver



h (m)	D (m)	E (lx)
38°		
1.0	0.69	4063
2.0	1.38	1016
3.0	2.07	451
4.0	2.76	253
5.0	3.45	162



DS-001
Beam mixed and eliminate
the corona effect

Remarks


*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.