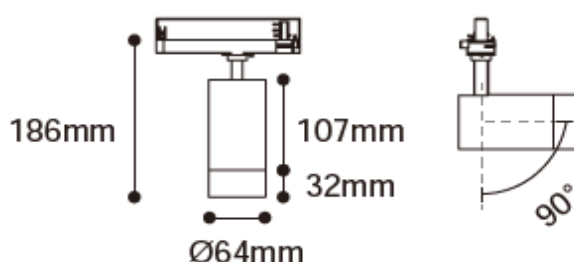



ASTER-B-64-RSP-UA-700

Product specification
INTERIOR TRACK LIGHTS

Technical Specification

Article number	2319.201-UA-700	
LED Consumption	25W	
Fixture Consumption	-	
Current / Voltage	700mA / 35.5Vdc	
CRI	95+	
CCT	2700K	3000K
LED Lumen ^{*1}	2273lm	2429lm
Delivered Lumen	-	-
Beam Angle available	15°/24°/36°/60°(Lens)	

Driver Technical Specification (Built-in)

Driver Brand	Vossloh-Schwabe	Driver Model	ECXe 1050.646
Input voltage / Frequency range	220-240Vac / 50/60Hz	Output Current / Voltage	700mA / 9-42Vdc
Dimming / Flicker	Non / Free	Certification	ENEC/CE
Power Factor	>0.9	Warranty	5years

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	Forged aluminum
	IEC 62031	Trim	-
Insulation	CLASS II	Optics	PC Lens
Protection	IP20	Heat sink	Forged aluminum
Tilt / Rotate	0~90° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	PC
Average Failure Time	L70(10k)>55000(h)	Baffle Color available	white / black / copper / mix

Accessories
Photometric


S-004
Long snoot



S-005
Asymmetrical snoot



SG-003
Oval Snoot



H-001
Honeycomb louver



DS-001
Beam mixed and eliminate
the corona effect

Remarks


*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.