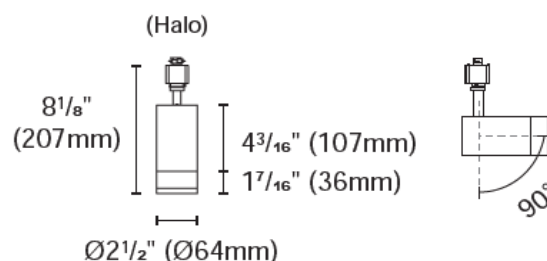



ASTER-B-Z-64-RSP-H3AM

Product specification
INTERIOR TRACK LIGHTS

Technical Specification

Article number	2319.201Z-H3AM-350	
LED Consumption	12W	
Fixture Consumption	15W	
Current / Voltage	350mA / 32.9Vdc	
CRI	95+	
CCT	2700K	3000K
LED Lumen ^{*1}	1233lm	1317lm
Delivered Lumen	763lm	815lm
Beam Angle available	15°~55°	

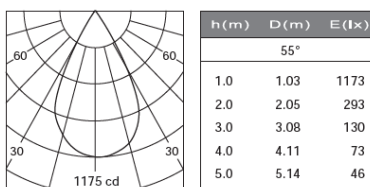
Driver Technical Specification (Built-in)

Driver Brand	RISE	Driver Model	TDI012NA035EF
Input voltage / Frequency range	120Vac / 50/60Hz	Output Current / Voltage	350mA / 32-38Vdc
Dimming / Flicker	Triac dimming / Free	Certification	ETL
Power Factor	>0.9	Warranty	-

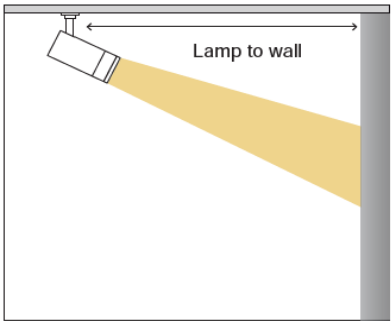
Technical character		Materials	
Products Standard	UL1574	Luminaire	Aluminum
	-	Trim	-
Insulation	CLASS III	Optics	PMMA Lens
Protection	IP20	Heat sink	Forged aluminum
Tilt / Rotate	0~90° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	L70(10k)>55000(h)	Baffle Color available	white / black / copper

Accessories


SG-004
Dynamic oval filter

Photometric

Remarks


*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.



ASTER-B-Z-64



	Lamp to wall	1M	2M	3M	Oval filter
Zoom in 55°		Max: Ø120cm	Max: Ø240cm	Max: Ø360cm	
Zoom out 15°		Max: Ø30mm	Max: Ø60mm	Max: Ø90mm	