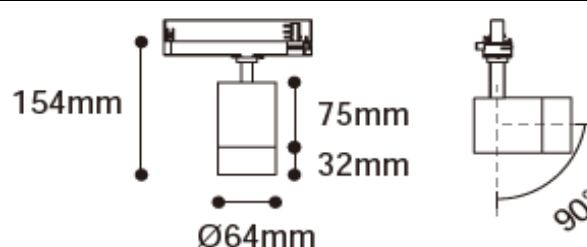



ASTER-B-64-RSP-UA-350

Product specification
INTERIOR TRACK LIGHTS

Technical Specification

Article number	2319.210-UA-350	
LED Consumption	12W	
Fixture Consumption	-	
Current / Voltage	350mA / 32.9Vdc	
CRI	95+	
CCT	2700K	3000K
LED Lumen ^{*1}	1233lm	1317lm
Delivered Lumen	-	1185lm
Beam Angle available	20°/25°/38°/50°(Lens)	

Driver Technical Specification (Built-in)

Driver Brand	POWERGEAR	Driver Model	PRO-UA420-W
Input voltage / Frequency range	220-240Vac / 50/60Hz	Output Current / Voltage	350mA / 25-42Vdc
Dimming / Flicker	Non / Free	Certification	ENEC/CE/CQC
Power Factor	>0.9	Warranty	5years

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	Forged aluminum
	IEC 62031	Trim	-
Insulation	CLASS II	Optics	PC Lens
Protection	IP20	Heat sink	Forged aluminum
Tilt / Rotate	0~90° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	PC
Average Failure Time	L70(10k)>55000(h)	Baffle Color available	white / black / copper / mix

Accessories


S-004
Long snoot



S-005
Asymmetrical snoot




SG-003
Oval Snoot



H-001
Honeycomb louver



DS-001
Beam mixed and eliminate
the corona effect

Photometric


h(m)	D(m)	E(lx)
38°		
1.0	0.92	1719
2.0	1.84	429
3.0	2.77	190
4.0	3.69	107
5.0	4.61	68

Remarks


*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.