




OZMMAS-S



Product specification

INTERIOR RECESSED DOWNLIGHTS

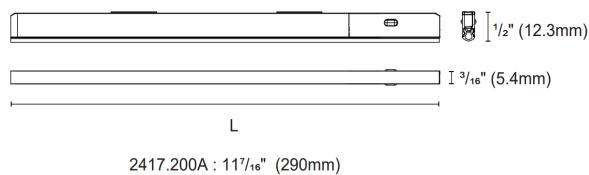

2417.200A : 11 7/16" (290mm)

L

Technical Specification

Article number	2417.200A
LED Consumption	-
Fixture Consumption	4.3W
Current / Voltage	24Vdc
CRI	90+
CCT	3000K
LED Lumen *1	-
Delivered Lumen	146lm
Beam Angle available	120°


Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Freqency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	Extruded aluminum
	IEC 62031	Trim	-
Insulation	CLASS III	Optics	PC Lens
Protection	IP20	Heat sink	Extruded aluminum
Tilt / Rotate	-	Fixture color available	Black
Operating temperature	0~35°C		
Average Failure Time	L70(6k) >36000(h)		

Accessories

Photometric

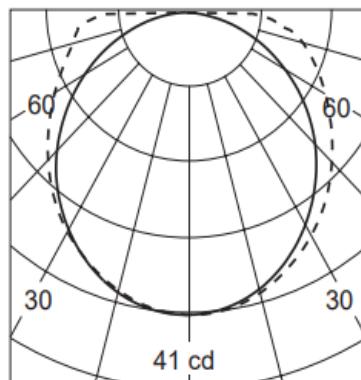

H(m)	D(m)	E(Ix)
120°		
1.0	2.81	13
2.0	5.62	3
3.0	8.42	1
4.0	11.23	0
5.0	14.04	0

* Barndoors are not suitable for vertical installation

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.