




OZMMAS-S



## Product specification

## INTERIOR RECESSED DOWNLIGHTS

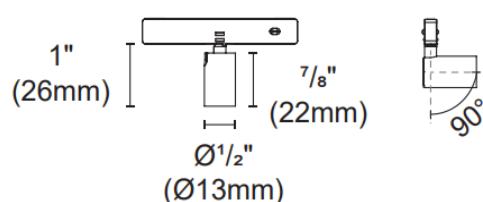

## Technical Specification

Article number	2417.201
LED Consumption	1W
Fixture Consumption	1.2W
Current / Voltage	24Vdc
CRI	90+
CCT	3000K
LED Lumen *1	111lm
Delivered Lumen	96lm
Beam Angle available	25°/35°/50°

## Driver Technical Specification (Remoted)


Driver Brand	-	Driver Model	-
Input voltage / Freqency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	Extruded aluminum
	IEC 62031	Trim	-
Insulation	CLASS III	Optics	PC Lens
Protection	IP20	Heat sink	Extruded aluminum
Tilt / Rotate	0~90° / 0~310°	Fixture color available	Black
Operating temperature	0~35°C		
Average Failure Time	L70(6k) >36000(h)		


## Accessories

S-014  
Snoot


## Photometric



H(m)	D(m)	E(lx)
25°		
1.0	0.46	163
2.0	0.92	40
3.0	1.38	18
4.0	1.84	10
5.0	2.31	6



H(m)	D(m)	E(lx)
50°		
1.0	0.92	82
2.0	1.84	20
3.0	2.76	9
4.0	3.68	5
5.0	4.60	3



H(m)	D(m)	E(lx)
35°		
1.0	0.60	153
2.0	1.20	38
3.0	1.80	17
4.0	2.41	9
5.0	3.01	6

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.