

Luminaire Photograph



Light Output Ratio:	88.4%	
Luminaire Power:	2.616 W	
SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	0.30	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2024-5-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRE-30G-11H-3A-00-0-0 Ra: 90
LENS: LL01ZZ-AF C10L06 25R
NO DRIVER: DC24V 700mA
30minutes warm-up

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

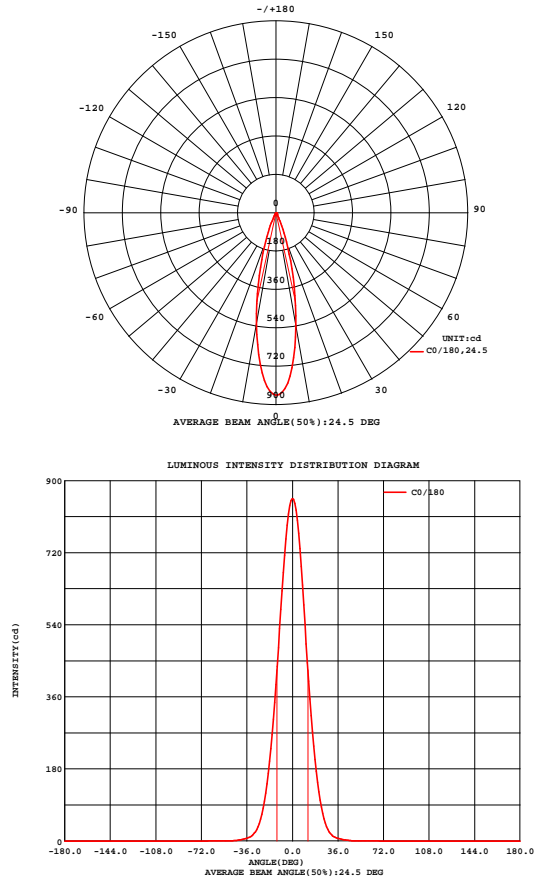


Fig. C0/C180

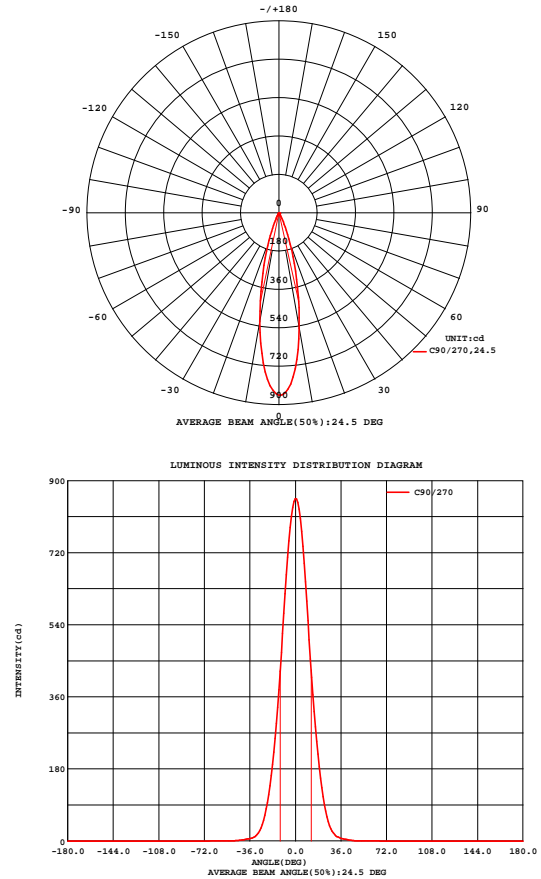


Fig. C90/C270


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-AF C10L06 25R
NO DRIVER:DC24V 700mA
30minutes warm-up

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:23.998V I:0.1090A P:2.6158W PF:1.0000 Freq:49.99Hz Lamp Flux:209.67x1 lm		
NAME: 2417.202	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405030521
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 70.89 lm/W			
MODEL	Brideglux	Imax(cd)	855.0	S/MH(C0/180)	0.41
NOMINAL POWER(W)	2.6	LOR(%)	88.4	S/MH(C90/270)	0.40
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	185.42	UP,DN(C0-180)	0.0,45.4
NOMINAL FLUX(lm)	209.67	CIE CLASS	DIRECT	UP,DN(C180-360)	0.0,43.0
LAMPS INSIDE	1	up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	24	down(%)	88.4	CIBSE SHR MAX	0.30

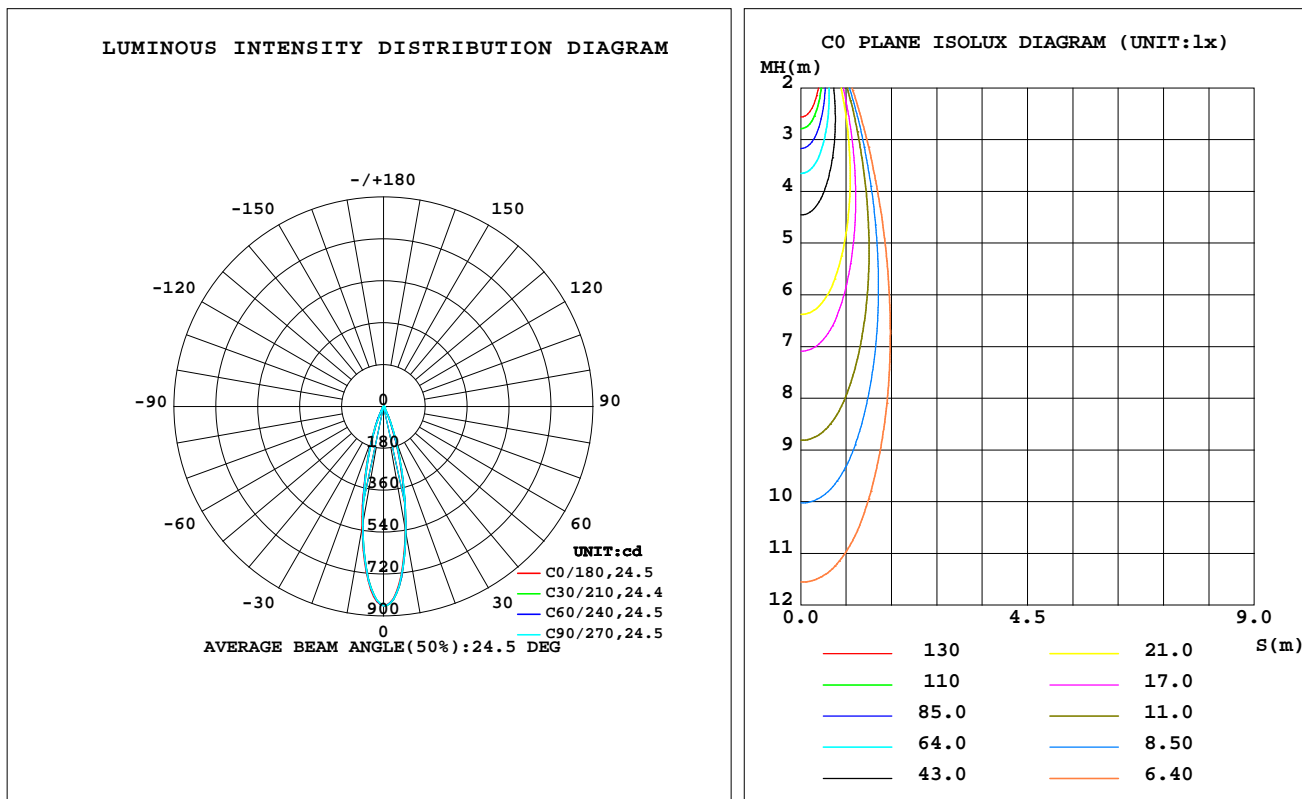

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-AF C10L06 25R
NO DRIVER:DC24V 700mA
30minutes warm-up

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


	C0	C45	C90	C135	C180	C225	C270	C315		zone	total	%lum,lamp
10	540.9	551.4	550.6	541.5	530.3	519.9	518.6	529.9	0- 10	65.16	65.16	35.1,31.1
20	146.6	154.3	157.3	151.3	142.5	138.8	137.8	142.2	10- 20	84.68	149.8	80.8,71.5
30	18.74	21.03	20.13	21.52	19.36	18.47	16.30	18.52	20- 30	28.50	178.3	96.2,85.1
40	3.732	4.241	4.064	4.426	3.788	3.768	3.676	3.778	30- 40	5.654	184.0	99.2,87.8
50	0.4319	0.4428	0.4277	0.4037	0.3666	0.4513	0.4814	0.4289	40- 50	1.211	185.2	99.9,88.3
60	0.0864	0.0789	0.0795	0.0890	0.0810	0.0834	0.0940	0.0746	50- 60	0.1881	185.4	100,88.4
70	0	0	0	0	0	0	0	0	60- 70	0.0265	185.4	100,88.4
80	0	0	0	0	0	0	0	0	70- 80	0	185.4	100,88.4
90	0	0	0	0	0	0	0	0	80- 90	0	185.4	100,88.4
100	0	0	0	0	0	0	0	0	90-100	0	185.4	100,88.4
110	0	0	0	0	0	0	0	0	100-110	0	185.4	100,88.4
120	0	0	0	0	0	0	0	0	110-120	0	185.4	100,88.4
130	0	0	0	0	0	0	0	0	120-130	0	185.4	100,88.4
140	0	0	0	0	0	0	0	0	130-140	0	185.4	100,88.4
150	0	0	0	0	0	0	0	0	140-150	0	185.4	100,88.4
160	0	0	0	0	0	0	0	0	150-160	0	185.4	100,88.4
170	0	0	0	0	0	0	0	0	160-170	0	185.4	100,88.4
180	0	0	0	0	0	0	0	0	170-180	0	185.4	100,88.4
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-AF C10L06 25R
NO DRIVER:DC24V 700mA
30minutes warm-up

LUMINANCE LIMITATION CURVES

Test:U:23.998V I:0.1090A P:2.6158W PF:1.0000 Freq:49.99Hz Lamp Flux:209.67x1 lm		
NAME: 2417.202	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405030521
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

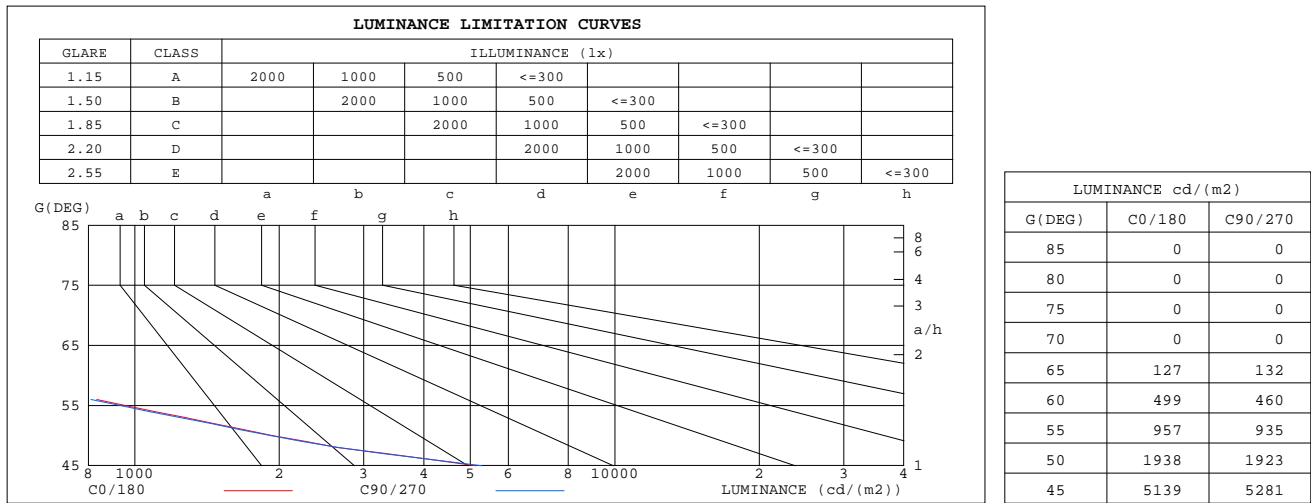


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-AF C10L06 25R
NO DRIVER:DC24V 700mA
30minutes warm-up

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:23.998V I:0.1090A P:2.6158W PF:1.0000 Freq:49.99Hz Lamp Flux:209.67x1 lm		
NAME: 2417.202	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405030521
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

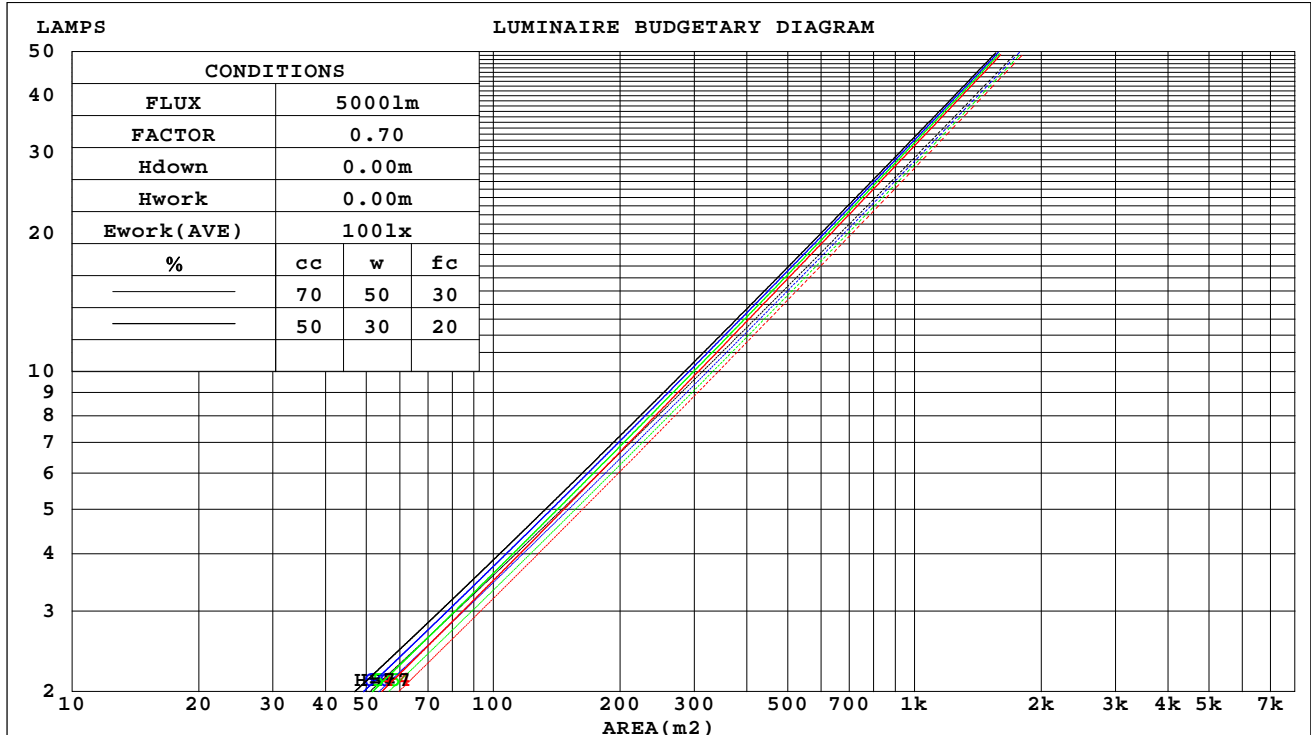

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-AF C10L06 25R
NO DRIVER:DC24V 700mA
30minutes warm-up

WEC AND CCEC

Test:U:23.998V I:0.1090A P:2.6158W PF:1.0000 Freq:49.99Hz Lamp Flux:209.67x1 lm		
NAME: 2417.202	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405030521
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0	
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
fc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.120	.068	.022	.114	.065	.021	.103	.059	.019	.093	.053	.017	.083	.048	.016		
2.0	.111	.061	.019	.106	.058	.018	.097	.054	.017	.089	.050	.016	.081	.046	.014		
3.0	.103	.055	.016	.099	.053	.016	.092	.050	.015	.085	.046	.014	.078	.043	.013		
4.0	.097	.050	.015	.093	.049	.014	.087	.046	.014	.081	.044	.013	.076	.041	.013		
5.0	.091	.046	.013	.088	.045	.013	.083	.043	.013	.078	.041	.012	.073	.039	.012		
6.0	.086	.043	.012	.084	.042	.012	.079	.041	.012	.075	.039	.011	.071	.037	.011		
7.0	.082	.041	.011	.080	.040	.011	.076	.038	.011	.072	.037	.011	.069	.036	.010		
8.0	.078	.038	.011	.076	.038	.011	.073	.036	.010	.070	.035	.010	.066	.034	.010		
9.0	.075	.036	.010	.073	.036	.010	.070	.035	.010	.067	.034	.010	.064	.033	.009		
10.0	.072	.034	.010	.070	.034	.009	.068	.033	.009	.065	.032	.009	.062	.031	.009		

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.168	.168	.168	.144	.144	.144	.098	.098	.098	.056	.056	.056	.018	.018	.018	
1.0	.149	.139	.131	.127	.120	.113	.087	.082	.078	.050	.048	.045	.016	.015	.015	
2.0	.133	.117	.105	.114	.101	.090	.078	.070	.063	.045	.041	.037	.014	.013	.012	
3.0	.119	.100	.085	.102	.086	.074	.070	.060	.052	.041	.035	.030	.013	.011	.010	
4.0	.108	.087	.070	.093	.075	.061	.064	.052	.043	.037	.031	.025	.012	.010	.008	
5.0	.099	.076	.058	.085	.065	.051	.059	.046	.036	.034	.027	.021	.011	.009	.007	
6.0	.091	.067	.049	.078	.058	.043	.054	.040	.030	.031	.024	.018	.010	.008	.006	
7.0	.084	.060	.042	.073	.052	.037	.050	.036	.026	.029	.021	.015	.009	.007	.005	
8.0	.079	.054	.036	.068	.046	.032	.047	.033	.022	.027	.019	.013	.009	.006	.004	
9.0	.074	.049	.032	.063	.042	.028	.044	.030	.020	.026	.017	.012	.008	.006	.004	
10.0	.069	.044	.028	.060	.038	.024	.041	.027	.017	.024	.016	.010	.008	.005	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-AF C10L06 25R
NO DRIVER:DC24V 700mA
30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:23.998V I:0.1090A P:2.6158W PF:1.0000 Freq:49.99Hz Lamp Flux:209.67x1 lm										
NAME: 2417.202			TYPE:			WEIGHT:				
SPEC.: 3000K			DIM.:			SERIAL No.: 2405030521				
MFR.: RISE			SUR.: 0.000346185m2			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.8	14.5	14.0	14.6	14.8	14.4	15.0	14.6	15.2	15.3
3H	13.7	14.3	13.9	14.5	14.7	14.2	14.8	14.5	15.0	15.2
4H	13.6	14.2	13.9	14.4	14.6	14.2	14.7	14.4	14.9	15.2
6H	13.5	14.1	13.8	14.3	14.5	14.1	14.6	14.4	14.9	15.1
8H	13.5	14.0	13.8	14.3	14.5	14.0	14.6	14.3	14.8	15.1
12H	13.4	13.9	13.8	14.2	14.5	14.0	14.5	14.3	14.8	15.0
4H 2H	13.6	14.2	13.9	14.4	14.6	14.2	14.7	14.4	14.9	15.2
3H	13.5	14.0	13.8	14.2	14.5	14.0	14.5	14.3	14.8	15.0
4H	13.4	13.8	13.7	14.1	14.4	13.9	14.4	14.2	14.7	15.0
6H	13.3	13.7	13.6	14.0	14.3	13.8	14.2	14.2	14.5	14.9
8H	13.2	13.6	13.6	13.9	14.3	13.7	14.1	14.1	14.5	14.8
12H	13.1	13.5	13.5	13.9	14.2	13.7	14.0	14.1	14.4	14.8
8H 4H	13.2	13.6	13.6	13.9	14.3	13.7	14.1	14.1	14.5	14.8
6H	13.1	13.4	13.5	13.8	14.2	13.6	13.9	14.1	14.3	14.7
8H	13.0	13.3	13.5	13.7	14.2	13.6	13.9	14.0	14.3	14.7
12H	13.0	13.2	13.4	13.6	14.1	13.5	13.7	14.0	14.2	14.7
12H 4H	13.1	13.5	13.5	13.9	14.2	13.7	14.0	14.1	14.4	14.8
6H	13.0	13.3	13.5	13.7	14.2	13.6	13.9	14.0	14.3	14.7
8H	13.0	13.2	13.4	13.6	14.1	13.5	13.7	14.0	14.2	14.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.1 / -15.6					+ 3.2 / -16.4				
1.5H	+ 5.6 / -11.7					+ 5.7 / -13.0				
2.0H	+ 6.9 / -10.7					+ 7.2 / -11.3				

CIE Pub.117, 209.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -5.4)
Area: 0.000346185 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-AF C10L06 25R
NO DRIVER:DC24V 700mA
30minutes warm-up

UTILIZATION FACTORS TABLE

Test:U:23.998V I:0.1090A P:2.6158W PF:1.0000 Freq:49.99Hz Lamp Flux:209.67x1 lm		
NAME: 2417.202	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405030521
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	81	76	73	80	75	72	80	75	72	70
0.80	87	82	79	86	82	79	85	81	79	76
1.00	90	86	83	89	85	83	88	85	82	79
1.25	93	89	86	92	89	86	91	88	85	82
1.50	95	92	89	94	91	89	92	90	88	84
2.00	97	94	91	96	93	91	94	91	89	85
2.50	98	95	93	97	94	92	94	92	91	86
3.00	100	97	95	98	96	94	95	93	92	86
4.00	101	99	97	100	98	96	96	95	94	88
5.00	102	101	99	100	99	98	97	96	95	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-AF C10L06 25R
NO DRIVER:DC24V 700mA
30minutes warm-up

ISOCANDELA DIAGRAM

Test:U:23.998V I:0.1090A P:2.6158W PF:1.0000 Freq:49.99Hz Lamp Flux:209.67x1 lm		
NAME: 2417.202	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405030521
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

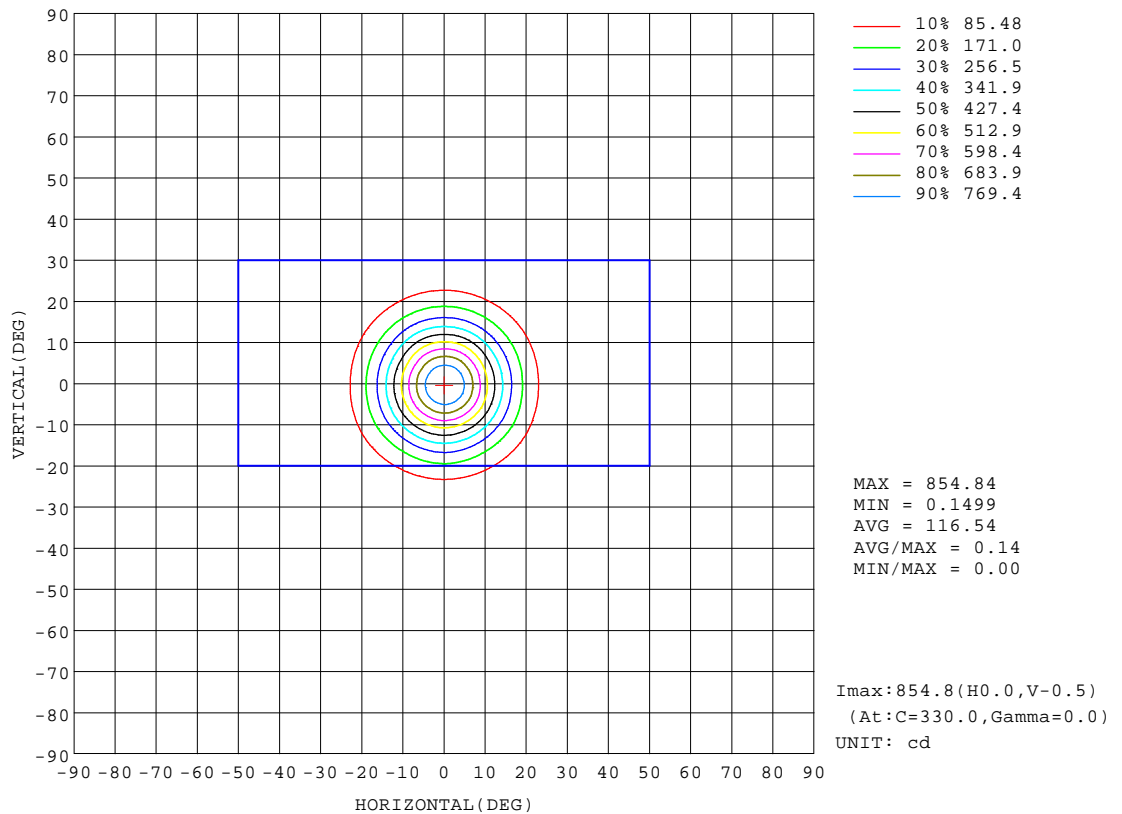


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-AF C10L06 25R
NO DRIVER:DC24V 700mA
30minutes warm-up

AAI Figure

Test:U:23.998V I:0.1090A P:2.6158W PF:1.0000 Freq:49.99Hz Lamp Flux:209.67x1 lm		
NAME: 2417.202	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405030521
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

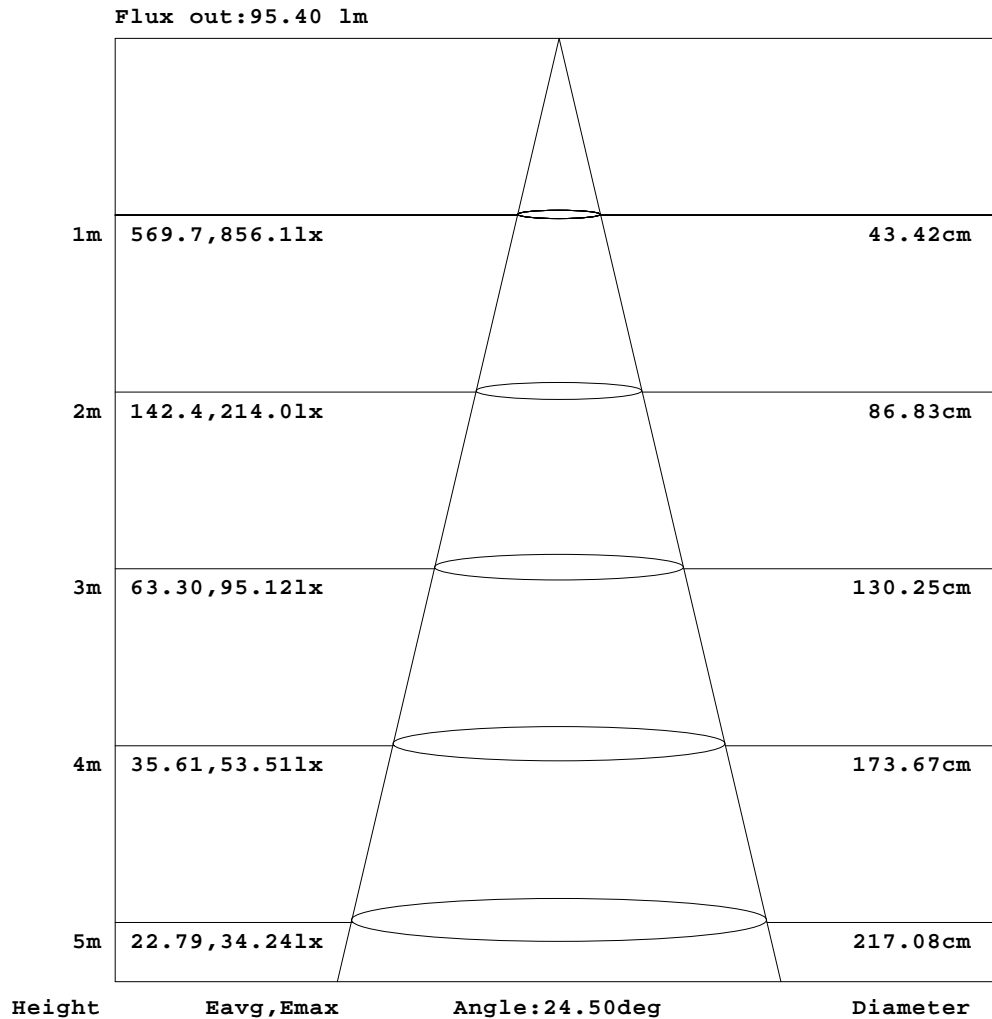


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2024-5-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRE-30G-11H-3A-00-0-0 Ra: 90
LENS: LL01ZZ-AF C10L06 25R
NO DRIVER: DC24V 700mA
30minutes warm-up

ISOLUX DIAGRAM

Test:U:23.998V I:0.1090A P:2.6158W PF:1.0000 Freq:49.99Hz Lamp Flux:209.67x1 lm		
NAME: 2417.202	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405030521
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

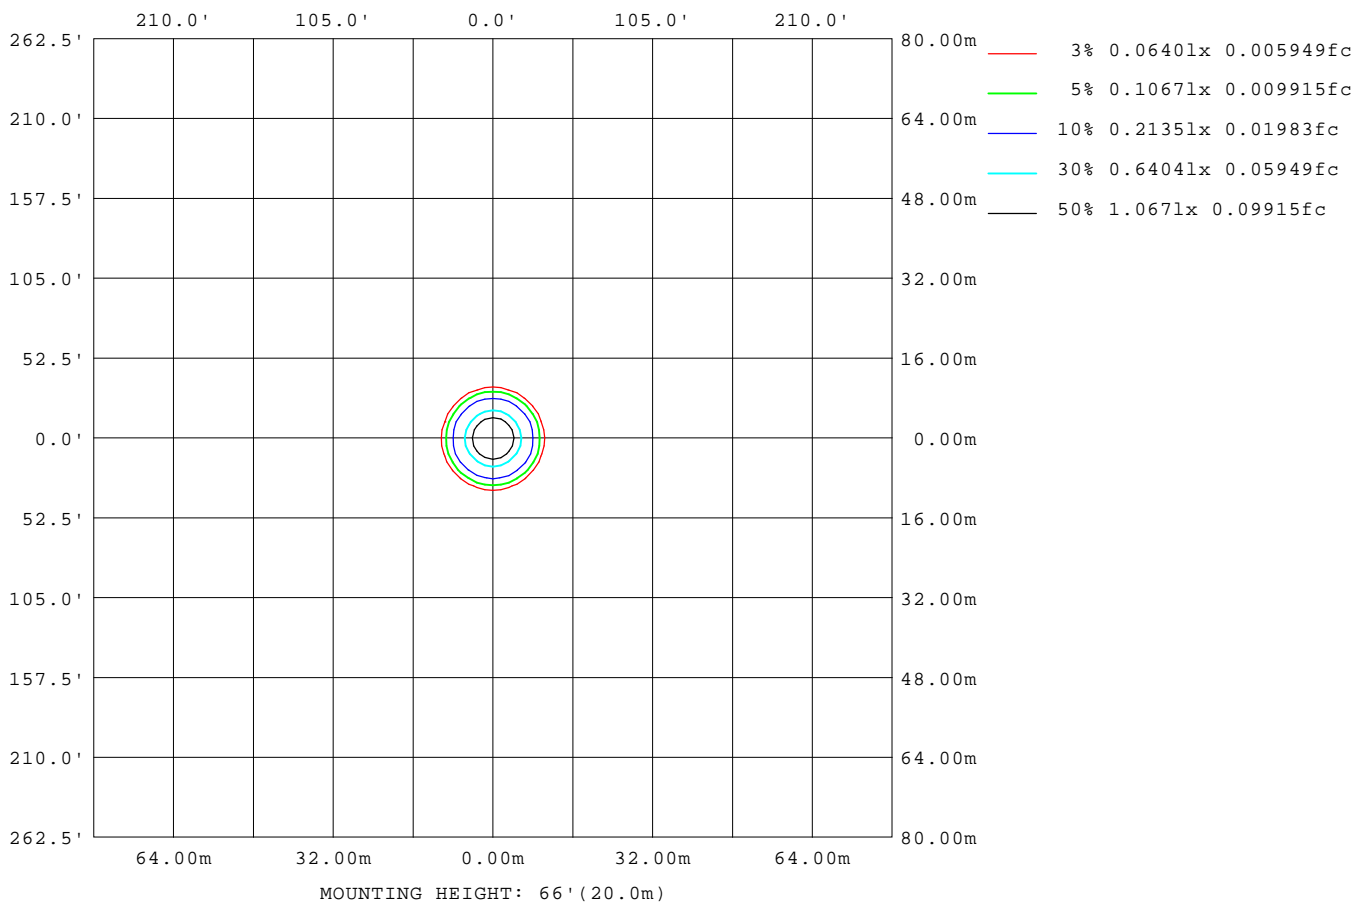

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-AF C10L06 25R
NO DRIVER:DC24V 700mA
30minutes warm-up

LED Avg.L Report

Test:U:23.998V I:0.1090A P:2.6158W PF:1.0000 Freq:49.99Hz Lamp Flux:209.67x1 lm		
NAME: 2417.202	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405030521
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	117
L_0~180(75)av	0
L_0~180(85)av	0
L_90~270(65)av	145
L_90~270(75)av	0
L_90~270(85)av	0
L_45(65)av	131
L_45(75)av	0
L_45(85)av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-AF C10L06 25R
NO DRIVER:DC24V 700mA
30minutes warm-up

Planar Illuminance Curve

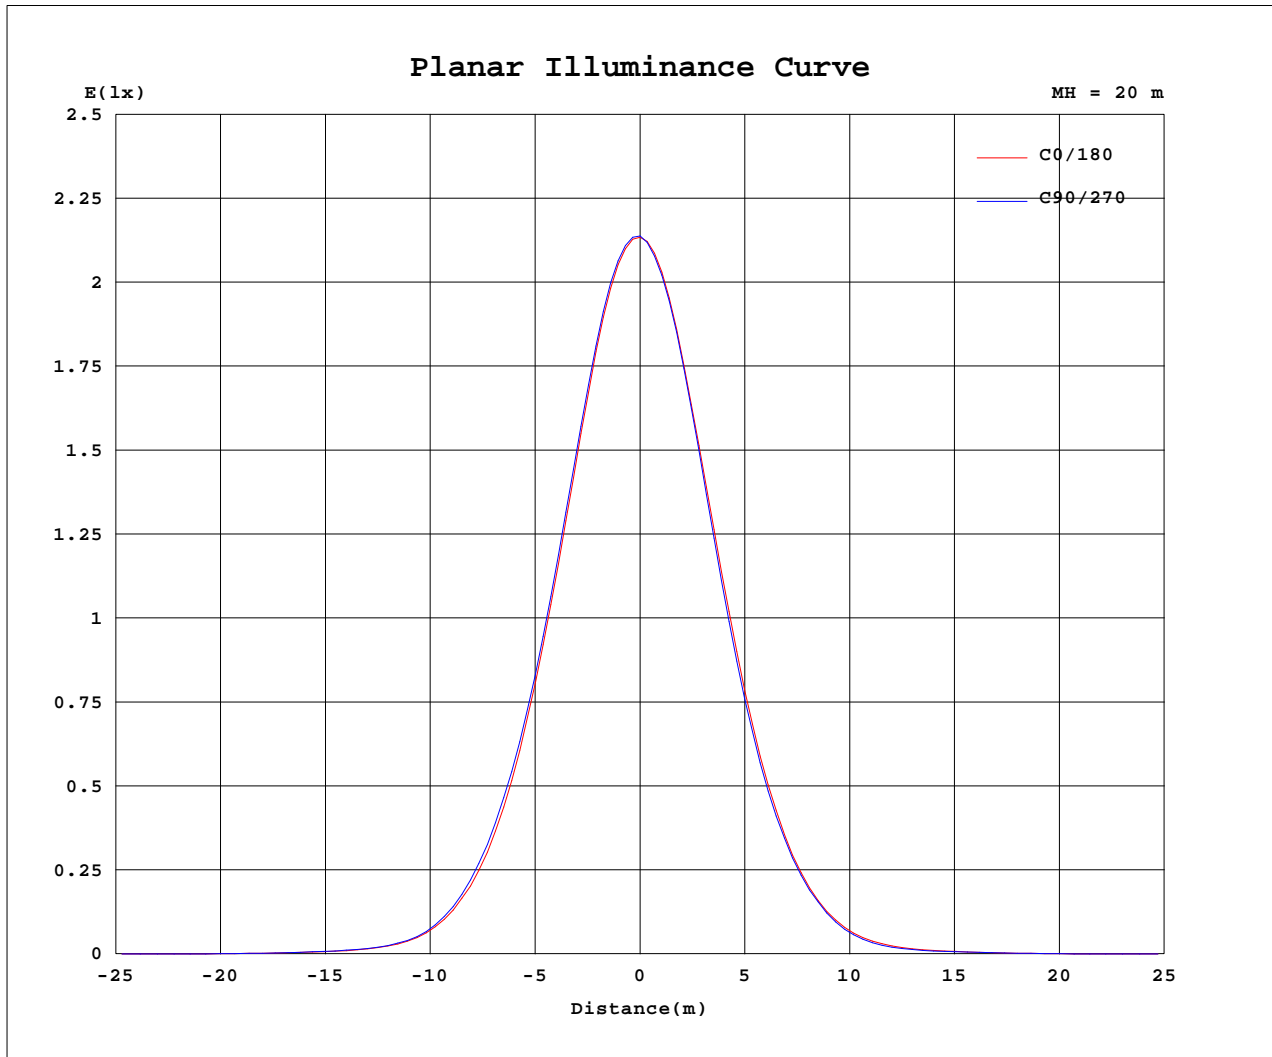

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: zoe
 Test Date: 2024-5-4

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: BXRE-30G-11H-3A-00-0-0 Ra: 90
 LENS: LL01ZZ-AF C10L06 25R
 NO DRIVER: DC24V 700mA
 30minutes warm-up



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:23.998V I:0.1090A P:2.6158W PF:1.0000 Freq:49.99Hz Lamp Flux:209.67x1 lm		
NAME: 2417.202	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405030521
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	855	855	855	855	855	855	855	855	855	855	855	855						
5	768	776	774	774	766	760	754	745	748	749	757	759						
10	541	552	551	551	544	539	530	518	522	519	528	531						
15	313	320	320	323	316	314	304	295	297	294	299	302						
20	147	157	152	157	150	153	142	140	137	138	139	145						
25	55.8	60.3	59.6	60.1	58.9	59.2	54.4	53.3	52.7	51.6	52.9	55.9						
30	18.7	20.4	21.7	20.1	21.8	21.3	19.4	18.0	19.0	16.3	19.0	18.1						
35	7.62	8.15	9.33	8.37	9.73	9.29	8.13	7.76	7.79	6.93	7.63	7.58						
40	3.73	4.11	4.38	4.06	4.50	4.35	3.79	3.83	3.71	3.68	3.67	3.88						
45	1.26	1.38	1.35	1.29	1.37	1.32	1.24	1.29	1.32	1.30	1.25	1.29						
50	0.43	0.46	0.42	0.43	0.39	0.41	0.37	0.45	0.46	0.48	0.42	0.44						
55	0.19	0.21	0.18	0.19	0.18	0.19	0.17	0.19	0.22	0.23	0.17	0.19						
60	0.09	0.08	0.07	0.08	0.08	0.09	0.08	0.08	0.08	0.09	0.07	0.08						
65	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02						
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-AF C10L06 25R
NO DRIVER:DC24V 700mA
30minutes warm-up