




OZMMAS-S



Product specification

INTERIOR RECESSED DOWNLIGHTS

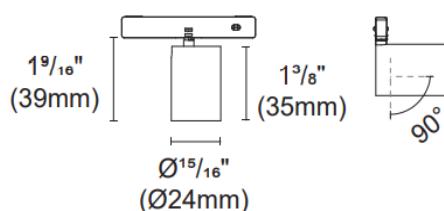

Technical Specification


Article number	2417.202
LED Consumption	2.1W
Fixture Consumption	2.6W
Current / Voltage	24Vdc
CRI	90+
CCT	3000K
LED Lumen ^{*1}	223m
Delivered Lumen	185lm
Beam Angle available	16°/25°/45°/60°

Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	Extruded aluminum
	IEC 62031	Trim	-
Insulation	CLASS III	Optics	PC Lens
Protection	IP20	Heat sink	Extruded aluminum
Tilt / Rotate	0~90° / 0~310°	Fixture color available	Black
Operating temperature	0~35°C		
Average Failure Time	L70(6k) >36000(h)		

Accessories



H-003
Honeycomb louver






DS-004
Asymmetric Diffusers



DS-005
Diffusers

Photometric

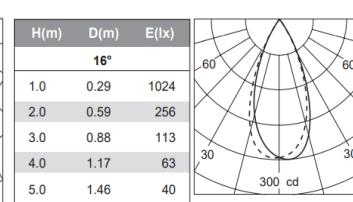

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.