




OZMMAS-S



Product specification

INTERIOR RECESSED DOWNLIGHTS

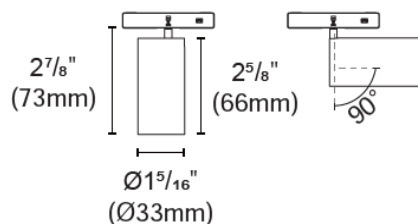

Technical Specification

Article number	2417.203
LED Consumption	5.8W
Fixture Consumption	6.5W
Current / Voltage	24Vdc
CRI	90+
CCT	3000K
LED Lumen *1	799lm
Delivered Lumen	668lm
Beam Angle available	24°/30°/40°/60°

Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character

Products Standard	IEC 60598-1	Luminaire	Forged aluminum
	IEC 62031	Trim	-
Insulation	CLASS III	Optics	PC Lens
Protection	IP20	Heat sink	Forged aluminum
Tilt / Rotate	0~90° / 0~355°	Fixture color available	Black
Operating temperature	0~35°C		
Average Failure Time	L70(19k)>105000(h)		


Materials

Accessories

H-004
Honeycomb louverDS-006
Asymmetric DiffusersDS-007
DiffusersB-001
Barndoor

* Barndoor is not suitable for vertical installation

Photometric

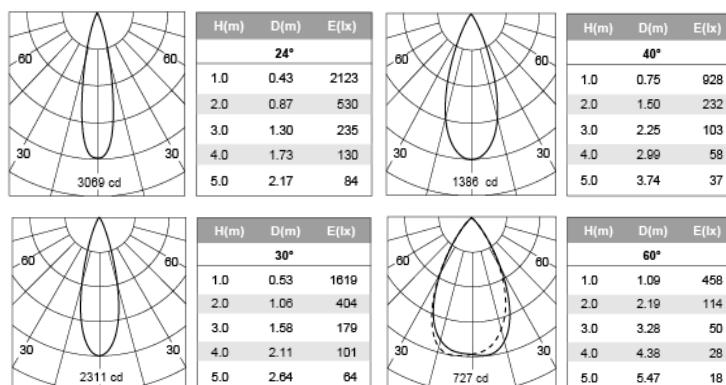

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.