

## Luminaire Photograph



Light Output Ratio:	60.4%	
Luminaire Power:	13.7 W	
SHR Nominal:	0.50	Calculated using the TM5
SHR Maximum:	0.50	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2024-8-10

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRE-30G1000-A-83 Ra:90  
LENS: PM-1082A 24R  
DRIVER: IT FIT 20/200-240/500 CS 350mA  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

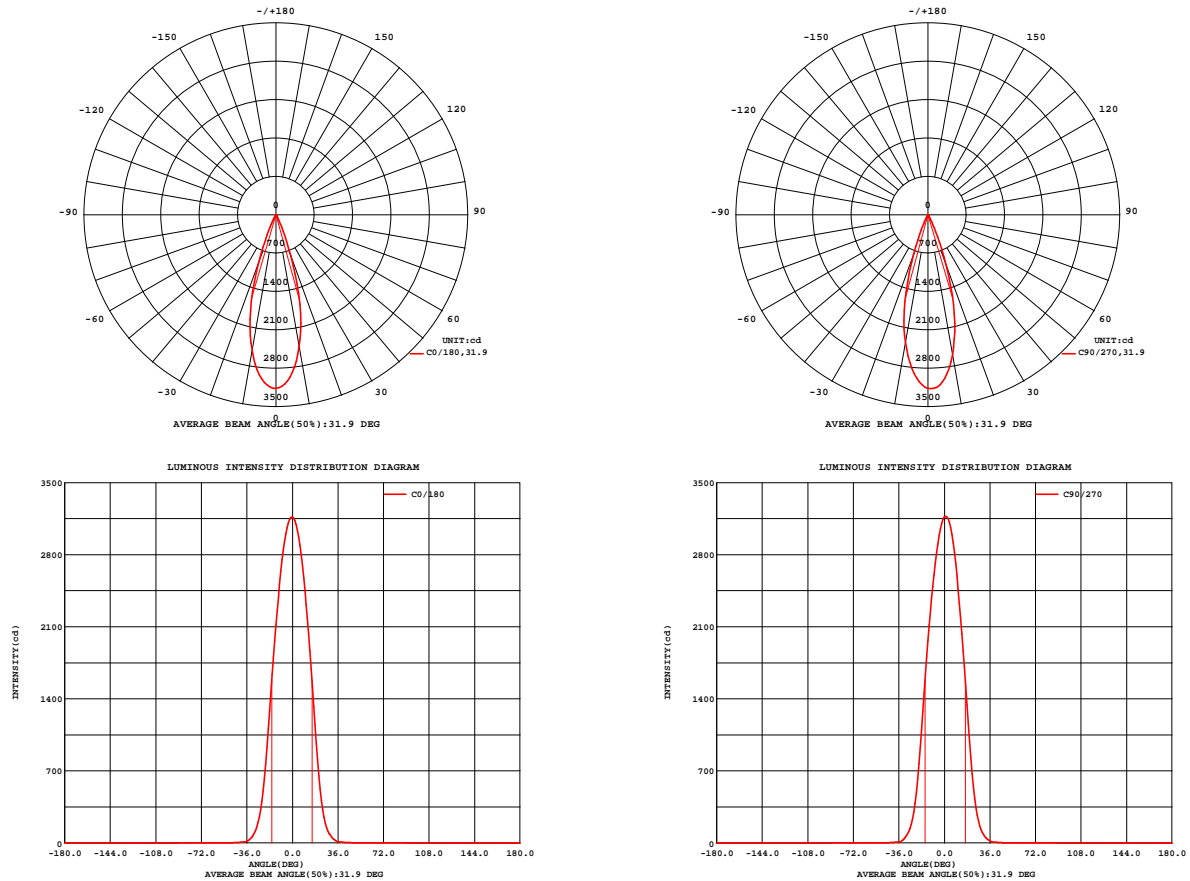


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2024-8-10

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRE-30G1000-A-83 Ra: 90  
LENS: PM-1082A 24R  
DRIVER: IT FIT 20/200-240/500 CS 350mA  
30minutes warm-up

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.19V I:0.0640A P:13.697W PF:0.9689 Freq:49.99Hz Lamp Flux:1490.38x1 lm		
NAME: 2418.105-ACOT-70	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2408101111
MFR.: RISE	SUR.: 0.004624m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 65.71 lm/W
MODEL	Bridgelux	I <sub>max</sub> (cd)	3173	S/MH(C0/180)	0.51	
NOMINAL POWER(W)	14	LOR(%)	60.4	S/MH(C90/270)	0.49	
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	900.05	UP,DN(C0-180)	0.0,31.5	
NOMINAL FLUX(lm)	1490.38	CIE CLASS	DIRECT	UP,DN(C180-360)	0.0,28.9	
LAMPS INSIDE	1	up(%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	220	down(%)	60.4	CIBSE SHR MAX	0.50	

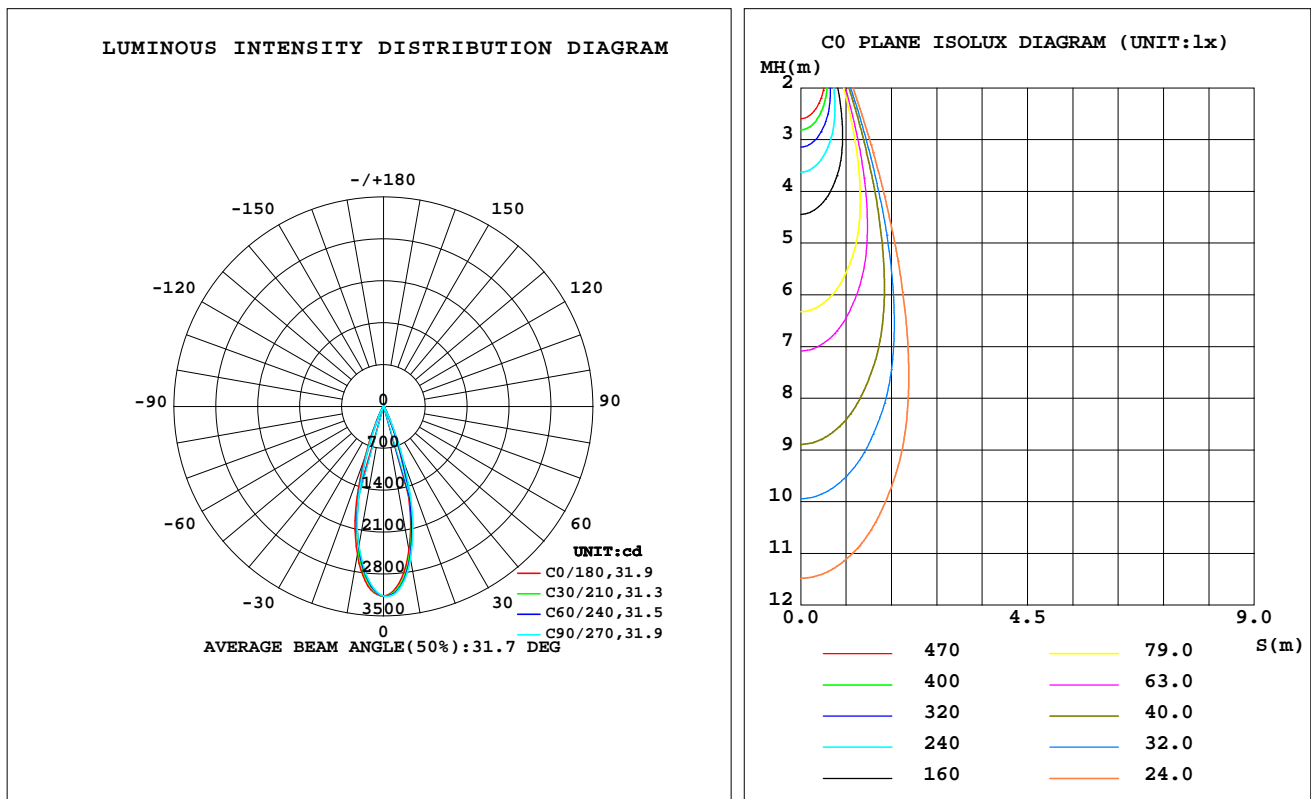

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-8-10

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENS:PM-1082A 24R  
DRIVER: IT FIT 20/200-240/500 CS 350mA  
30minutes warm-up

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:


	C0	C45	C90	C135	C180	C225	C270	C315		zone	total	%lum,lamp
10	2446	2544	2593	2595	2516	2416	2374	2359	0- 10	269.0	269.0	29.9,18.1
20	808.1	867.5	986.5	948.4	930.4	812.0	771.8	722.2	10- 20	455.9	725.0	80.5,48.6
30	75.72	91.36	102.3	105.1	94.39	85.98	67.11	71.65	20- 30	151.2	876.1	97.3,58.8
40	6.757	8.732	7.218	10.33	7.188	7.271	5.632	6.108	30- 40	19.93	896.1	99.6,60.1
50	1.563	1.831	1.277	1.762	1.817	1.901	1.058	1.629	40- 50	2.909	899.0	99.9,60.3
60	0.6363	0.4168	0.2317	0.2847	0.5673	0.5814	0.4530	0.5407	50- 60	0.7363	899.7	100,60.4
70	0.0713	0.0831	0.1222	0.1234	0.0811	0.1131	0.0480	0.0868	60- 70	0.2628	900.0	100,60.4
80	0.0345	0.0206	0.0323	0.0226	0.0288	0.0175	0.0313	0.0174	70- 80	0.0424	900.0	100,60.4
90	0	0	0	0	0	0	0	0	80- 90	0.0185	900.0	100,60.4
100	0	0	0	0	0	0	0	0	90-100	0	900.0	100,60.4
110	0	0	0	0	0	0	0	0	100-110	0	900.0	100,60.4
120	0	0	0	0	0	0	0	0	110-120	0	900.0	100,60.4
130	0	0	0	0	0	0	0	0	120-130	0	900.0	100,60.4
140	0	0	0	0	0	0	0	0	130-140	0	900.0	100,60.4
150	0	0	0	0	0	0	0	0	140-150	0	900.0	100,60.4
160	0	0	0	0	0	0	0	0	150-160	0	900.0	100,60.4
170	0	0	0	0	0	0	0	0	160-170	0	900.0	100,60.4
180	0	0	0	0	0	0	0	0	170-180	0	900.0	100,60.4
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-8-10

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENS:PM-1082A 24R  
DRIVER: IT FIT 20/200-240/500 CS 350mA  
30minutes warm-up

### LUMINANCE LIMITATION CURVES

Test:U:220.19V I:0.0640A P:13.697W PF:0.9689 Freq:49.99Hz Lamp Flux:1490.38x1 lm		
NAME: 2418.105-ACOT-70	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2408101111
MFR.: RISE	SUR.: 0.004624m2	Shielding Angle:

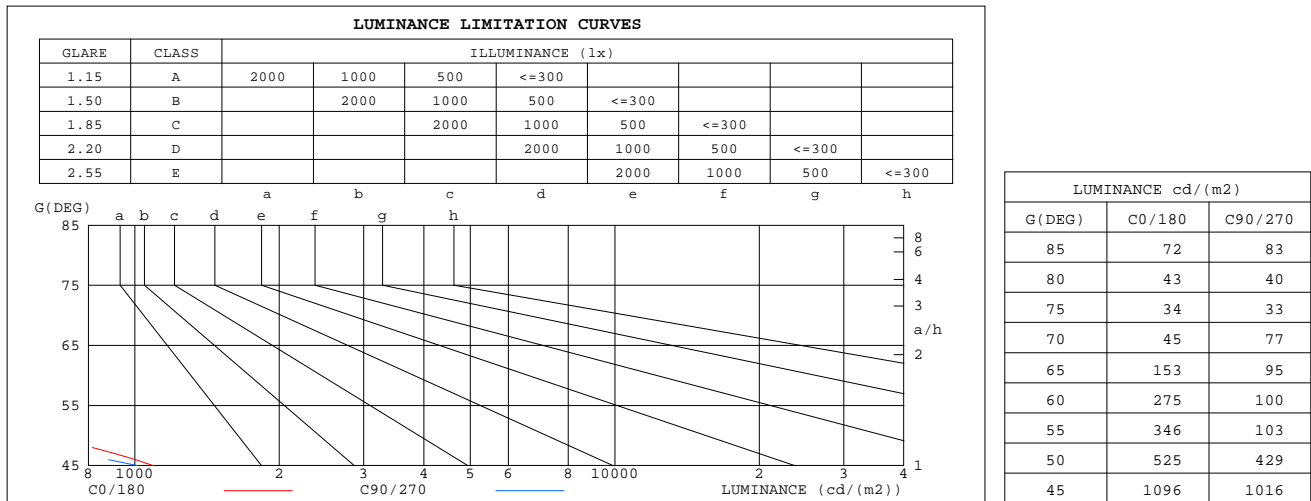

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-8-10

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENS:PM-1082A 24R  
DRIVER: IT FIT 20/200-240/500 CS 350mA  
30minutes warm-up

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.19V I:0.0640A P:13.697W PF:0.9689 Freq:49.99Hz  
Lamp Flux:1490.38x1 lm

NAME: 2418.105-ACOT-70

TYPE:

WEIGHT:

SPEC.: 3000K

DIM.:


SERIAL No.: 2408101111

MFR.: RISE

SUR.: 0.004624m2

Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	.72	.72	.72	.70	.70	.70	.67	.67	.67	.64	.64	.64	.62	.62	.62	.60
1.0	.68	.67	.66	.67	.66	.65	.64	.64	.63	.62	.62	.61	.60	.60	.59	.58
2.0	.65	.63	.62	.64	.62	.61	.62	.61	.60	.60	.59	.58	.59	.58	.57	.56
3.0	.62	.60	.58	.61	.59	.58	.60	.58	.57	.59	.57	.56	.57	.56	.55	.54
4.0	.60	.57	.55	.59	.57	.55	.58	.56	.55	.57	.55	.54	.56	.54	.53	.53
5.0	.57	.55	.53	.57	.55	.53	.56	.54	.52	.55	.53	.52	.54	.53	.52	.51
6.0	.55	.53	.51	.55	.53	.51	.54	.52	.51	.53	.52	.50	.53	.51	.50	.49
7.0	.54	.51	.49	.53	.51	.49	.53	.50	.49	.52	.50	.49	.51	.50	.48	.48
8.0	.52	.49	.48	.52	.49	.47	.51	.49	.47	.50	.49	.47	.50	.48	.47	.46
9.0	.50	.48	.46	.50	.48	.46	.50	.47	.46	.49	.47	.46	.49	.47	.46	.45
10.0	.49	.46	.45	.49	.46	.45	.48	.46	.45	.48	.46	.44	.47	.46	.44	.44

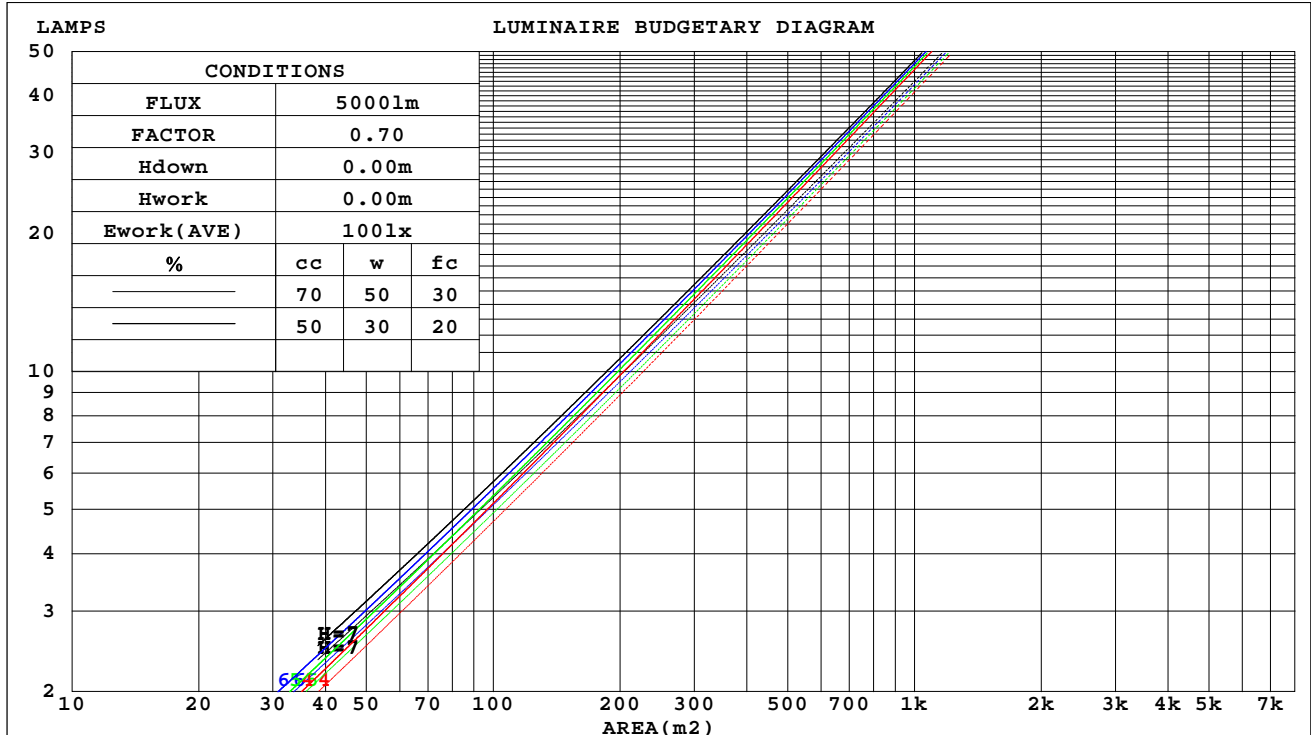

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-8-10

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENS:PM-1082A 24R  
DRIVER: IT FIT 20/200-240/500 CS 350mA  
30minutes warm-up



## WEC AND CCEC

Test:U:220.19V I:0.0640A P:13.697W PF:0.9689 Freq:49.99Hz Lamp Flux:1490.38x1 lm		
NAME: 2418.105-ACOT-70	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2408101111
MFR.: RISE	SUR.: 0.004624m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.083	.047	.015	.079	.045	.014	.072	.041	.013	.065	.037	.012	.058	.034	.011	
2.0	.077	.042	.013	.074	.041	.013	.068	.038	.012	.062	.035	.011	.057	.032	.010	
3.0	.072	.038	.011	.069	.037	.011	.064	.035	.011	.059	.032	.010	.055	.030	.009	
4.0	.067	.035	.010	.065	.034	.010	.061	.032	.010	.057	.030	.009	.053	.029	.009	
5.0	.064	.032	.009	.062	.032	.009	.058	.030	.009	.055	.029	.009	.051	.027	.008	
6.0	.060	.030	.009	.059	.030	.009	.055	.028	.008	.053	.027	.008	.050	.026	.008	
7.0	.057	.028	.008	.056	.028	.008	.053	.027	.008	.051	.026	.008	.048	.025	.007	
8.0	.055	.027	.008	.054	.026	.007	.051	.026	.007	.049	.025	.007	.047	.024	.007	
9.0	.053	.025	.007	.051	.025	.007	.049	.024	.007	.047	.024	.007	.045	.023	.007	
10.0	.050	.024	.007	.049	.024	.007	.048	.023	.007	.046	.023	.006	.044	.022	.006	

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.115	.115	.115	.098	.098	.098	.067	.067	.067	.039	.039	.039	.012	.012	.012	
1.0	.102	.095	.089	.087	.082	.077	.060	.056	.053	.034	.033	.031	.011	.010	.010	
2.0	.091	.080	.071	.078	.069	.062	.053	.048	.043	.031	.028	.025	.010	.009	.008	
3.0	.082	.068	.058	.070	.059	.050	.048	.041	.035	.028	.024	.021	.009	.008	.007	
4.0	.074	.059	.048	.064	.051	.041	.044	.036	.029	.025	.021	.017	.008	.007	.006	
5.0	.068	.052	.040	.058	.045	.035	.040	.031	.024	.023	.018	.014	.008	.006	.005	
6.0	.063	.046	.034	.054	.040	.029	.037	.028	.021	.022	.016	.012	.007	.005	.004	
7.0	.058	.041	.029	.050	.035	.025	.035	.025	.018	.020	.015	.011	.006	.005	.003	
8.0	.054	.037	.025	.047	.032	.021	.032	.022	.015	.019	.013	.009	.006	.004	.003	
9.0	.051	.033	.021	.044	.029	.019	.030	.020	.013	.018	.012	.008	.006	.004	.003	
10.0	.048	.030	.019	.041	.026	.016	.029	.019	.012	.017	.011	.007	.005	.004	.002	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-8-10

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENS:PM-1082A 24R  
DRIVER: IT FIT 20/200-240/500 CS 350mA  
30minutes warm-up

## UGR(Unified Glare Rating) Table

Test:U:220.19V I:0.0640A P:13.697W PF:0.9689 Freq:49.99Hz Lamp Flux:1490.38x1 lm										
NAME: 2418.105-ACOT-70					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2408101111		
MFR.: RISE					SUR.: 0.004624m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	1.1	1.7	1.3	1.9	2.0	2.5	3.1	2.7	3.3	3.4
3H	0.9	1.5	1.2	1.7	1.9	2.3	2.9	2.6	3.1	3.3
4H	0.8	1.4	1.1	1.6	1.8	2.2	2.8	2.5	3.0	3.2
6H	0.8	1.3	1.0	1.5	1.8	2.2	2.7	2.4	2.9	3.2
8H	0.7	1.2	1.0	1.5	1.7	2.1	2.6	2.4	2.9	3.1
12H	0.7	1.2	1.0	1.4	1.7	2.1	2.6	2.4	2.8	3.1
4H 2H	0.8	1.4	1.1	1.6	1.8	2.2	2.8	2.5	3.0	3.2
3H	0.7	1.2	1.0	1.4	1.7	2.1	2.6	2.4	2.8	3.1
4H	0.6	1.0	0.9	1.3	1.6	2.0	2.4	2.3	2.7	3.0
6H	0.5	0.9	0.8	1.2	1.6	1.9	2.3	2.2	2.6	3.0
8H	0.4	0.8	0.8	1.2	1.5	1.8	2.2	2.2	2.6	2.9
12H	0.4	0.7	0.8	1.1	1.5	1.8	2.1	2.2	2.5	2.9
8H 4H	0.4	0.8	0.8	1.2	1.5	1.8	2.2	2.2	2.6	2.9
6H	0.3	0.6	0.7	1.0	1.4	1.7	2.0	2.1	2.4	2.8
8H	0.3	0.5	0.7	1.0	1.4	1.6	1.9	2.1	2.3	2.8
12H	0.2	0.4	0.7	0.9	1.3	1.6	1.8	2.0	2.3	2.7
12H 4H	0.4	0.7	0.8	1.1	1.5	1.8	2.1	2.2	2.5	2.9
6H	0.3	0.5	0.7	0.9	1.4	1.6	1.9	2.1	2.3	2.8
8H	0.2	0.4	0.7	0.9	1.3	1.6	1.8	2.0	2.3	2.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.9 / - 7.8					+ 3.7 / -13.7				
1.5H	+ 4.7 / - 7.3					+ 5.9 / -11.2				
2.0H	+ 5.1 / - 4.7					+ 6.0 / - 8.0				

CIE Pub.117, 1490 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.4)  
Area: 0.004624 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-8-10

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENS:PM-1082A 24R  
DRIVER: IT FIT 20/200-240/500 CS 350mA  
30minutes warm-up



### UTILIZATION FACTORS TABLE

Test:U:220.19V I:0.0640A P:13.697W PF:0.9689 Freq:49.99Hz Lamp Flux:1490.38x1 lm		
NAME: 2418.105-ACOT-70	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2408101111
MFR.: RISE	SUR.: 0.004624m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	55	52	50	55	52	50	54	51	50	48
0.80	59	56	54	59	56	54	58	56	54	52
1.00	62	59	57	61	58	56	60	58	56	54
1.25	64	61	59	63	61	59	62	60	58	56
1.50	65	63	61	64	62	61	63	61	60	57
2.00	66	64	62	66	64	62	64	62	61	58
2.50	67	65	64	66	64	63	65	63	62	58
3.00	68	66	65	67	65	64	65	64	63	59
4.00	69	68	67	68	67	66	66	65	64	60
5.00	70	69	68	69	68	67	66	66	65	60
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-8-10

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENS:PM-1082A 24R  
DRIVER: IT FIT 20/200-240/500 CS 350mA  
30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:220.19V I:0.0640A P:13.697W PF:0.9689 Freq:49.99Hz Lamp Flux:1490.38x1 lm		
NAME: 2418.105-ACOT-70	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2408101111
MFR.: RISE	SUR.: 0.004624m2	Shielding Angle:

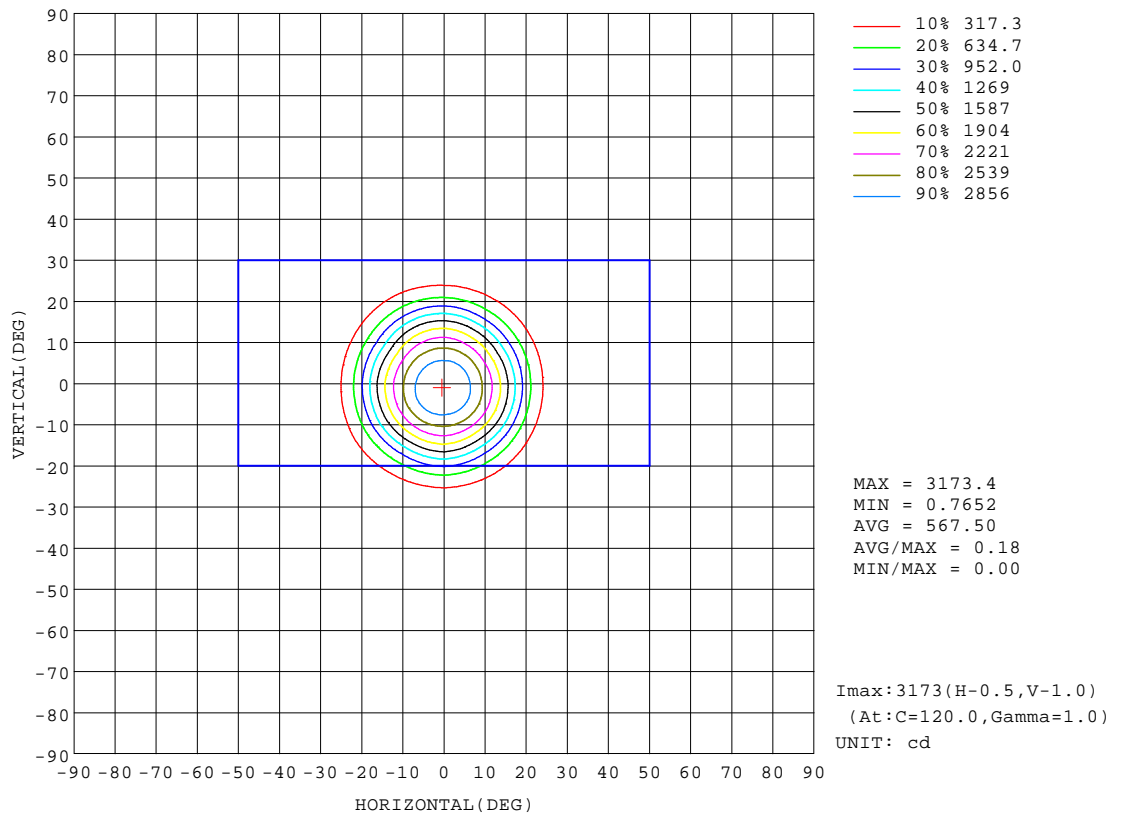


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-8-10

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENS:PM-1082A 24R  
DRIVER: IT FIT 20/200-240/500 CS 350mA  
30minutes warm-up

## AAI Figure

Test:U:220.19V I:0.0640A P:13.697W PF:0.9689 Freq:49.99Hz Lamp Flux:1490.38x1 lm		
NAME: 2418.105-ACOT-70	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2408101111
MFR.: RISE	SUR.: 0.004624m2	Shielding Angle:

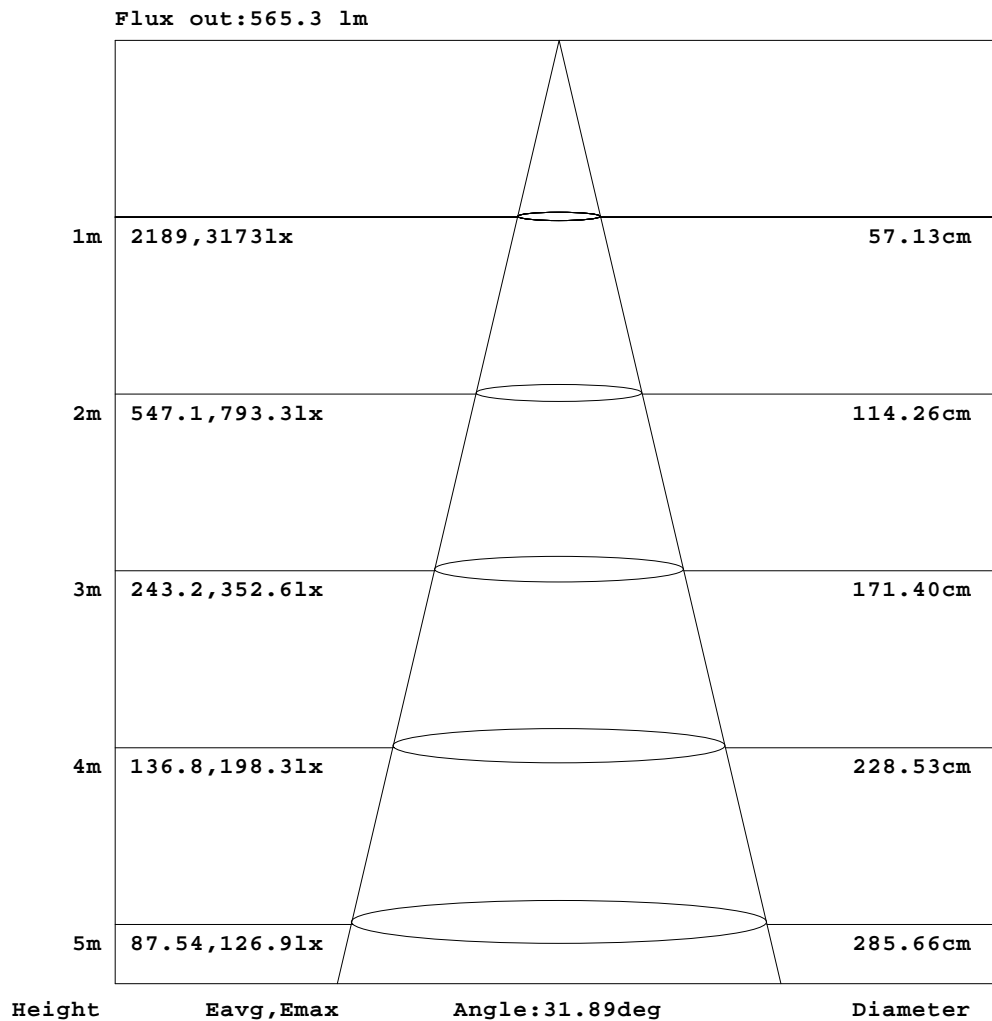


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-8-10

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENS:PM-1082A 24R  
DRIVER: IT FIT 20/200-240/500 CS 350mA  
30minutes warm-up

## ISOLUX DIAGRAM

Test:U:220.19V I:0.0640A P:13.697W PF:0.9689 Freq:49.99Hz Lamp Flux:1490.38x1 lm		
NAME: 2418.105-ACOT-70	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2408101111
MFR.: RISE	SUR.: 0.004624m2	Shielding Angle:

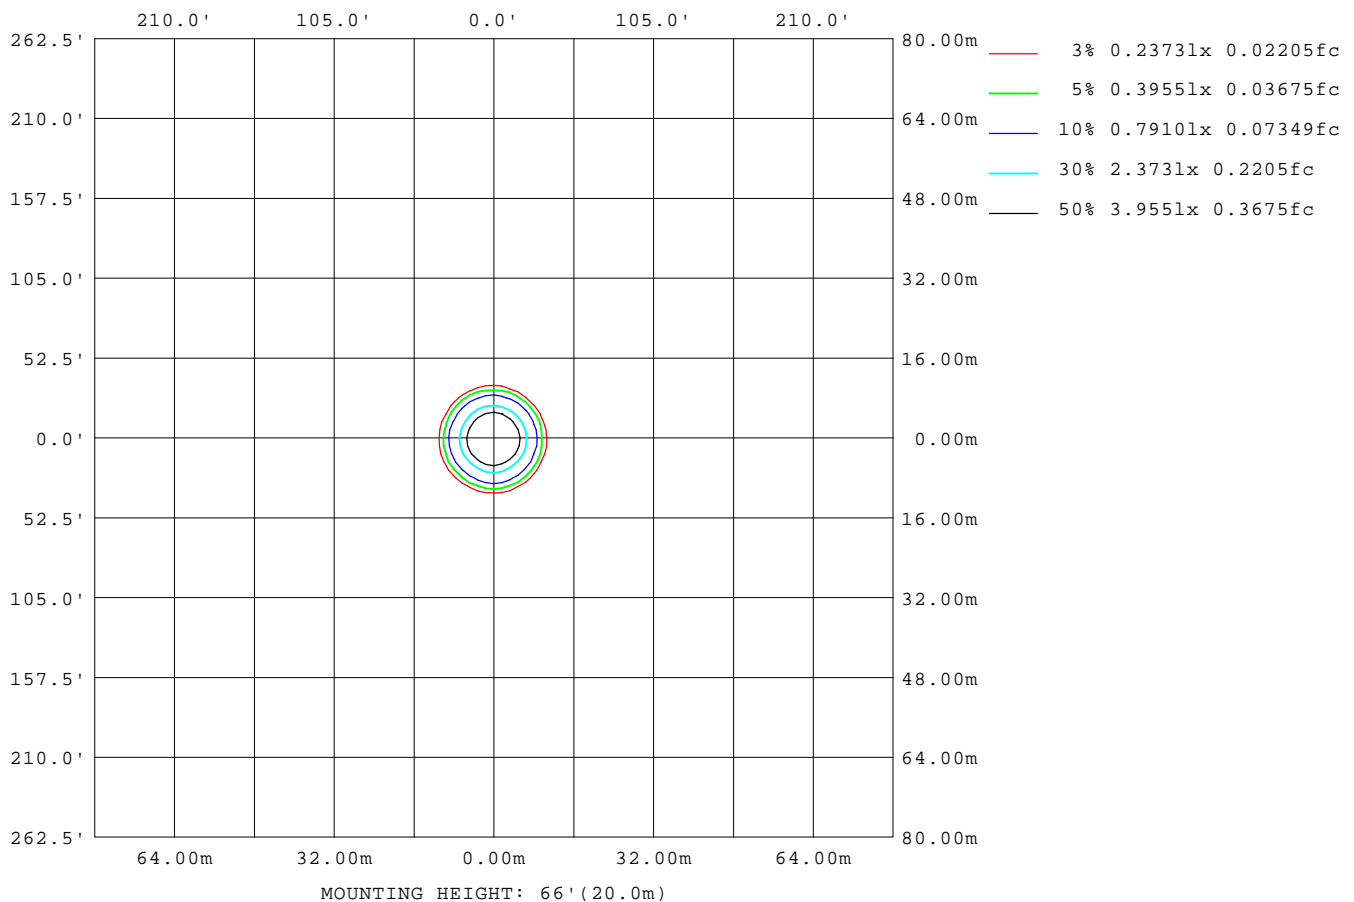

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-8-10

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENS:PM-1082A 24R  
DRIVER: IT FIT 20/200-240/500 CS 350mA  
30minutes warm-up

### LED Avg.L Report

Test:U:220.19V I:0.0640A P:13.697W PF:0.9689 Freq:49.99Hz Lamp Flux:1490.38x1 lm		
NAME: 2418.105-ACOT-70	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2408101111
MFR.: RISE	SUR.: 0.004624m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	147
L_0~180(75)av	33
L_0~180(85)av	61
L_90~270(65)av	104
L_90~270(75)av	30
L_90~270(85)av	83
L_45(65)av	139
L_45(75)av	23
L_45(85)av	23

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-8-10

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENS:PM-1082A 24R  
DRIVER: IT FIT 20/200-240/500 CS 350mA  
30minutes warm-up

## Planar Illuminance Curve

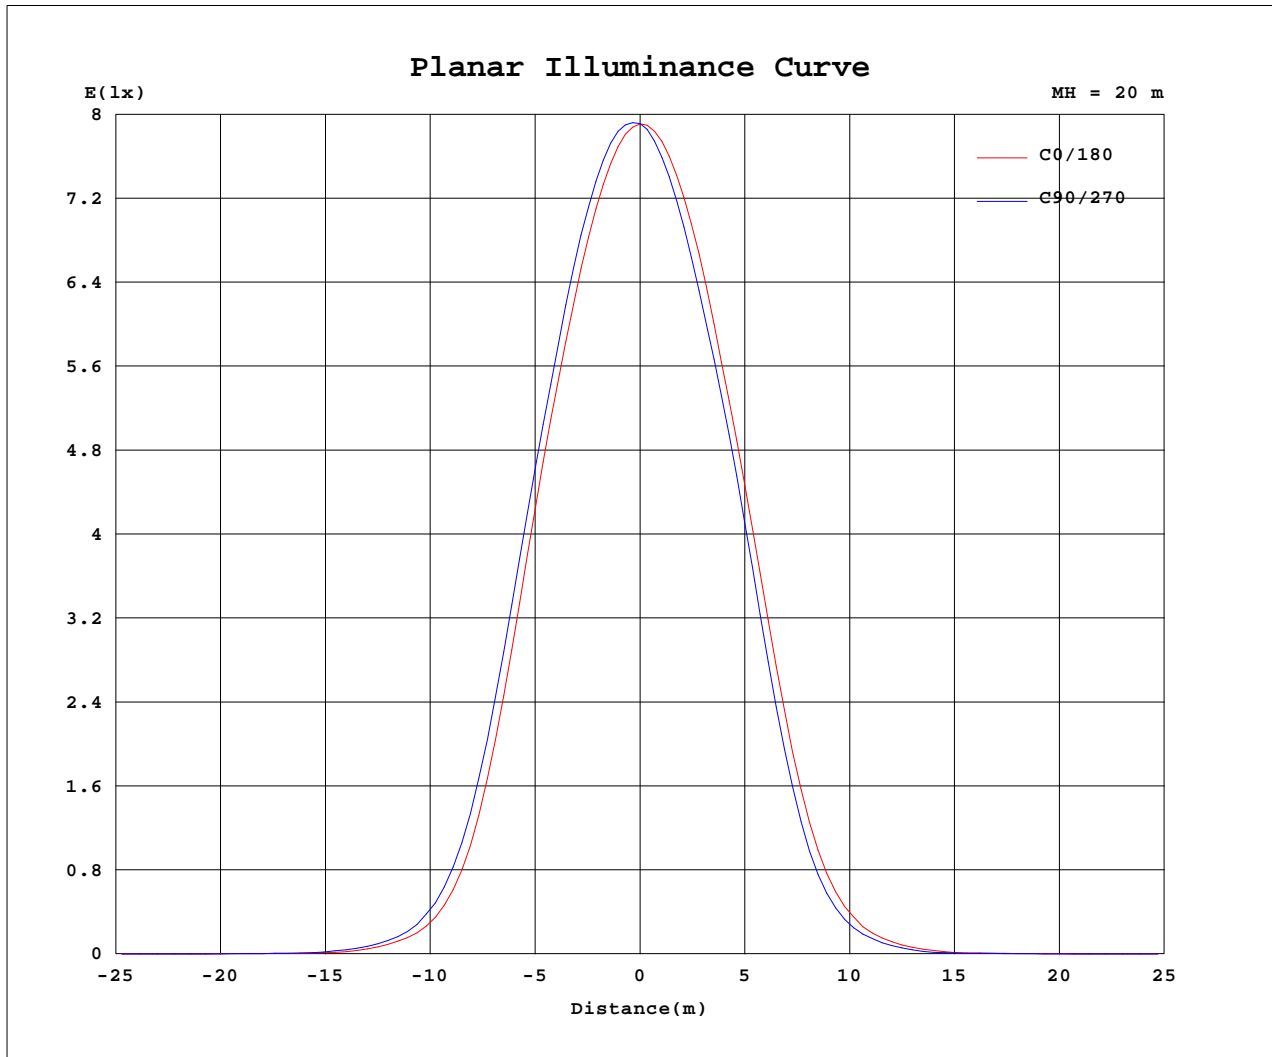

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators: zoe  
 Test Date: 2024-8-10

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: BXRE-30G1000-A-83 Ra:90  
 LENS: PM-1082A 24R  
 DRIVER: IT FIT 20/200-240/500 CS 350mA  
 30minutes warm-up



## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.19V I:0.0640A P:13.697W PF:0.9689 Freq:49.99Hz Lamp Flux:1490.38x1 lm		
NAME: 2418.105-ACOT-70	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2408101111
MFR.: RISE	SUR.: 0.004624m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	3166	3166	3166	3166	3166	3166	3166	3166	3166	3166	3166	3166						
5	2969	3012	3049	3062	3070	3049	3004	2960	2924	2905	2917	2934						
10	2446	2520	2567	2593	2605	2585	2516	2442	2391	2374	2348	2371						
15	1692	1757	1770	1867	1833	1837	1801	1652	1664	1636	1568	1571						
20	808	845	890	987	931	966	930	829	796	772	712	732						
25	250	275	313	344	332	348	319	286	269	236	235	238						
30	75.7	85.2	97.5	102	102	108	94.4	91.4	80.6	67.1	68.1	75.2						
35	17.6	29.2	32.8	30.7	34.5	35.7	24.4	29.2	23.5	12.4	22.0	23.7						
40	6.76	7.55	9.91	7.22	10.9	9.72	7.19	8.29	6.25	5.63	5.93	6.28						
45	3.59	3.76	3.74	3.32	3.93	4.07	3.67	3.73	3.25	2.73	2.94	3.32						
50	1.56	2.00	1.66	1.28	1.74	1.78	1.82	2.06	1.74	1.06	1.51	1.74						
55	0.92	0.80	0.59	0.27	0.52	0.70	0.77	0.98	0.73	0.64	0.71	0.80						
60	0.64	0.56	0.27	0.23	0.25	0.32	0.57	0.64	0.52	0.45	0.51	0.57						
65	0.30	0.29	0.18	0.19	0.20	0.22	0.28	0.37	0.30	0.22	0.28	0.31						
70	0.07	0.09	0.07	0.12	0.15	0.10	0.08	0.13	0.10	0.05	0.08	0.09						
75	0.04	0.03	0.03	0.04	0.04	0.03	0.04	0.03	0.02	0.03	0.02	0.02						
80	0.03	0.02	0.02	0.03	0.02	0.02	0.03	0.02	0.02	0.03	0.02	0.02						
85	0.03	0.01	0.01	0.03	0.01	0.01	0.02	0.01	0.01	0.03	0.01	0.01						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-8-10

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENS:PM-1082A 24R  
DRIVER: IT FIT 20/200-240/500 CS 350mA  
30minutes warm-up