




TAURUS-20-A



## Product specification

## INTERIOR CABINET LIGHTS



18

## Technical Specification

Article number	2468.101
LED Consumption	1W
Fixture Consumption	-
Current / Voltage	300mA / --Vdc
CRI	90+
CCT	3000K
LED Lumen <sup>*1</sup>	84lm
Delivered Lumen	-
Beam Angle available	30° (Lens)

## Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	aluminum
	IEC 62031	Optics	PC Lens
Insulation	CLASS III	Fixture color available	brass
Protection	IP40		
Tilt / Rotate	0~935° / 0~360°		
Operating temperature	0~35°C		
Average Failure Time			

## Accessories

## Photometric


## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.



## WIRING DIAGRAM

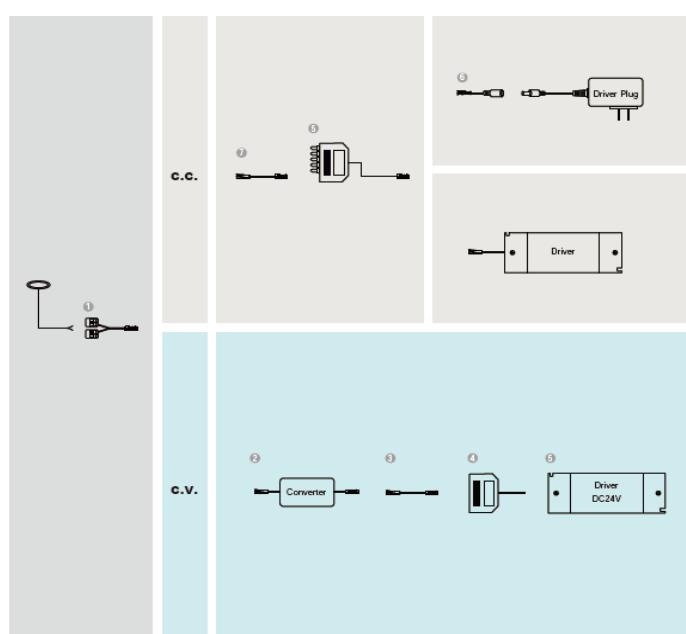

### Accessory



Quick connector cord  
Length : 2.37"(6cm)

### C.C Accessory (Constant Current)



3 way series connection cord  
Length : 6"(15.24cm)



Driver connection cord  
Length : 3.94"(10cm)



Connection cord  
Length : 36"(91.44cm)

### C.V Accessory (Constant Voltage)



I/P: 24V,  
O/P: 300mA/max.3.9V



3 way parallel connection cord  
Length : 6"(15.24cm)



I/P: 24V,  
O/P: 700mA/max.3.9V



I/P: 220-240V,  
O/P: 24VDC/max.15w  
CE/TUV/UKCA



Connection cord  
Length : 36"(91.44cm)



I/P: 120V,  
O/P: 24VDC/max.12w  
CE/CUL/FCC