


Luminaire Photograph

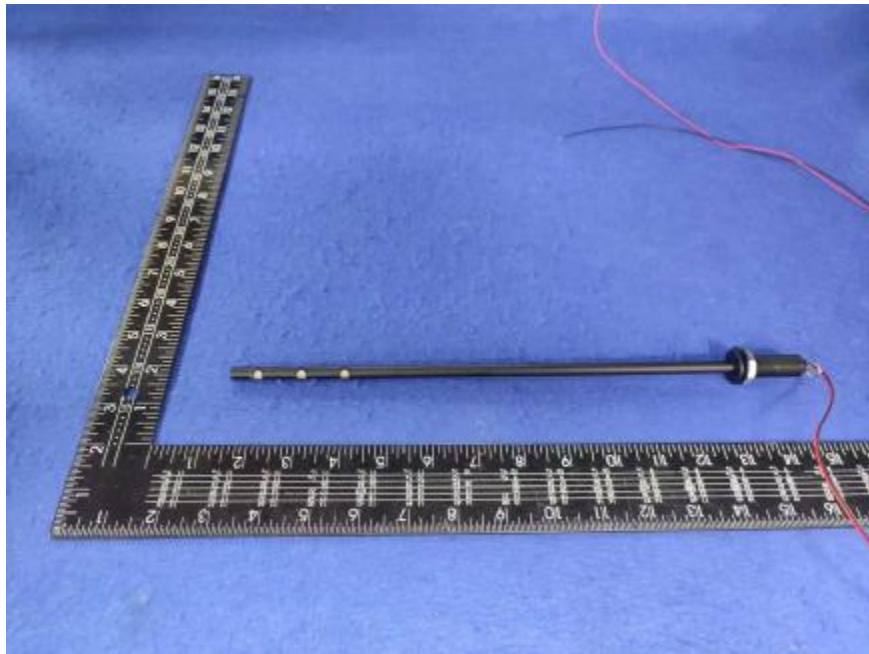

Light Output Ratio:	66.7%	
Luminaire Power:	3.107 W	
SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	0.30	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2024-5-8

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXCP-30G-11L-J11-3-A1-00-0-0 Ra: 90
LENS: PM-0137 30R
NO DRIVER: 350mA
30minutes warm-up

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

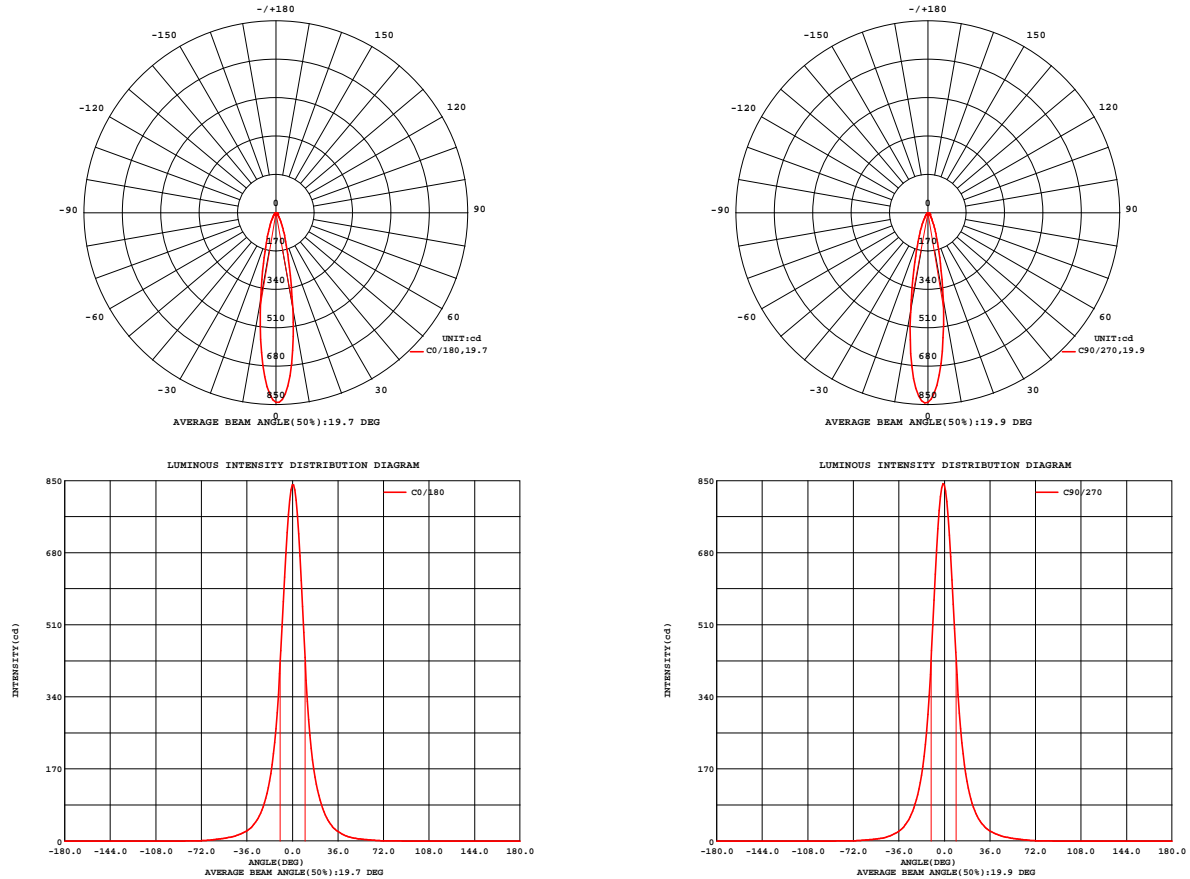


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2024-5-8

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXCP-30G-11L-J11-3-A1-00-0-0 Ra: 90
LENS: PM-0137 30R
NO DRIVER: 350mA
30minutes warm-up

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:8.8803V I:0.3499A P:3.1072W PF:1.0000 Freq:49.99Hz Lamp Flux:273.81x1 lm		
NAME: 2468.103B	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405080531
MFR.: RISE	SUR.: 0.00001875m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 58.77 lm/W			
MODEL	Brideglux	I _{max} (cd)	845.2	S/MH(C0/180)	0.33
NOMINAL POWER(W)	3	LOR(%)	66.7	S/MH(C90/270)	0.36
RATED VOLTAGE(V)	9	TOTAL FLUX(lm)	182.61	UP,DN(C0-180)	0.0,32.8
NOMINAL FLUX(lm)	273.81	CIE CLASS	DIRECT	UP,DN(C180-360)	0.0,33.9
LAMPS INSIDE	1	up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	9	down(%)	66.7	CIBSE SHR MAX	0.30

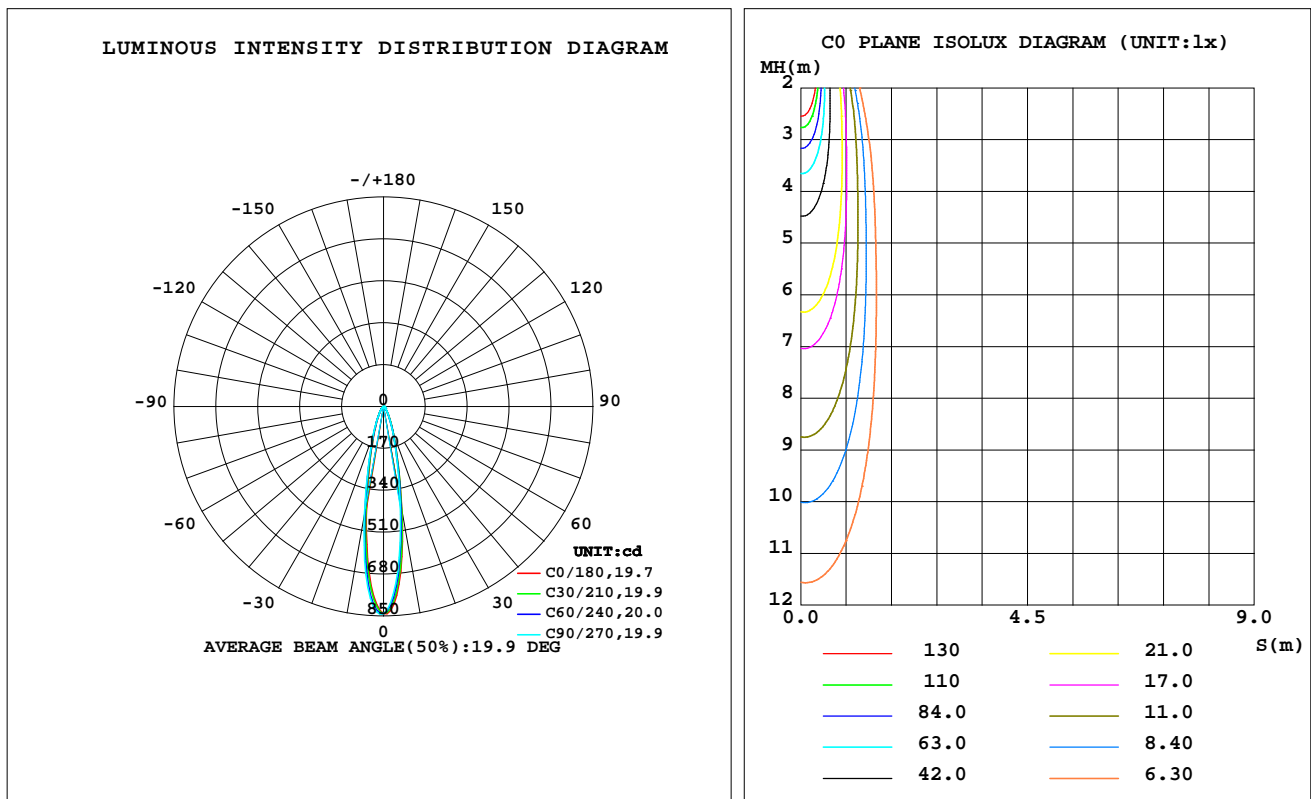

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-8

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXCP-30G-11L-J11-3-A1-00-0-0 Ra:90
LENS:PM-0137 30R
NO DRIVER: 350mA
30minutes warm-up

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

	C0	C45	C90	C135	C180	C225	C270	C315		zone	total	%lum,lamp
10	433.0	416.6	392.5	382.4	394.7	424.0	448.4	448.2	0- 10	57.46	57.46	31.5,21
20	119.8	116.2	111.4	109.8	112.1	117.1	122.5	123.9	10- 20	61.29	118.8	65,43.4
30	40.33	39.66	39.66	40.07	40.02	40.21	41.00	41.27	20- 30	31.83	150.6	82.5,55
40	15.66	16.50	17.69	18.21	17.65	16.88	16.07	15.57	30- 40	16.40	167.0	91.4,61
50	6.044	7.086	8.328	8.816	8.318	7.340	6.192	5.840	40- 50	8.612	175.6	96.2,64.1
60	2.856	3.412	4.076	4.272	4.013	3.466	2.892	2.739	50- 60	4.626	180.2	98.7,65.8
70	0.7132	0.8329	0.9583	0.9685	0.9361	0.8289	0.7255	0.7052	60- 70	1.954	182.2	99.8,66.5
80	0.1375	0.1524	0.1729	0.1913	0.1931	0.1621	0.1309	0.1336	70- 80	0.3914	182.6	100,66.7
90	0	0	0	0	0	0	0	0	80- 90	0.0351	182.6	100,66.7
100	0	0	0	0	0	0	0	0	90-100	0	182.6	100,66.7
110	0	0	0	0	0	0	0	0	100-110	0	182.6	100,66.7
120	0	0	0	0	0	0	0	0	110-120	0	182.6	100,66.7
130	0	0	0	0	0	0	0	0	120-130	0	182.6	100,66.7
140	0	0	0	0	0	0	0	0	130-140	0	182.6	100,66.7
150	0	0	0	0	0	0	0	0	140-150	0	182.6	100,66.7
160	0	0	0	0	0	0	0	0	150-160	0	182.6	100,66.7
170	0	0	0	0	0	0	0	0	160-170	0	182.6	100,66.7
180	0	0	0	0	0	0	0	0	170-180	0	182.6	100,66.7
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-8

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXCP-30G-11L-J11-3-A1-00-0-0 Ra:90
LENS:PM-0137 30R
NO DRIVER: 350mA
30minutes warm-up

LUMINANCE LIMITATION CURVES

Test:U:8.8803V I:0.3499A P:3.1072W PF:1.0000 Freq:49.99Hz
Lamp Flux:273.81x1 lm

NAME: 2468.103B

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2405080531

MFR.: RISE

SUR.: 0.00001875m2

Shielding Angle:

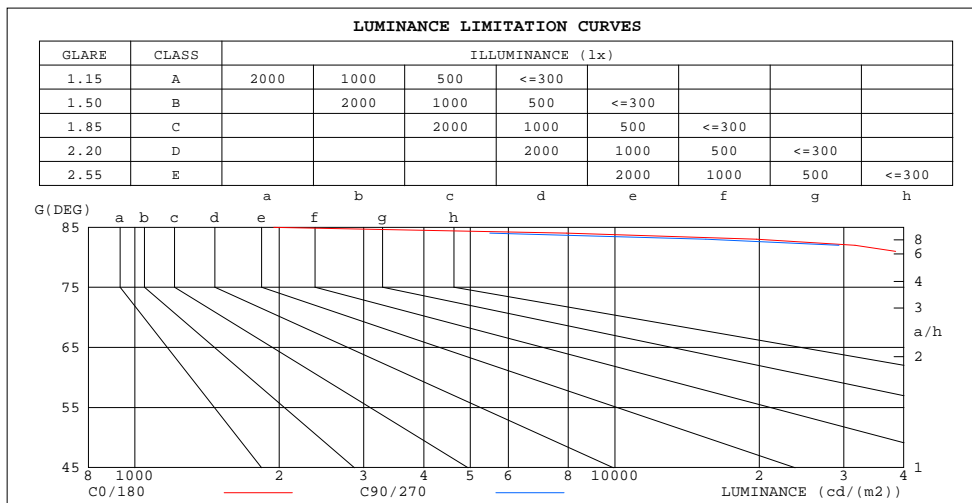

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	1949	569
80	42307	53120
75	52817	65341
70	111446	149467
65	194336	287265
60	305334	434880
55	395903	549465
50	502550	691163
45	716053	908835

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-8

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXCP-30G-11L-J11-3-A1-00-0-0 Ra:90
LENS:PM-0137 30R
NO DRIVER: 350mA
30minutes warm-up

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:8.8803V I:0.3499A P:3.1072W PF:1.0000 Freq:49.99Hz
Lamp Flux:273.81x1 lm

NAME: 2468.103B

TYPE:

WEIGHT:

SPEC.: 3000K

DIM.:


SERIAL No.: 2405080531

MFR.: RISE

SUR.: 0.00001875m2

Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

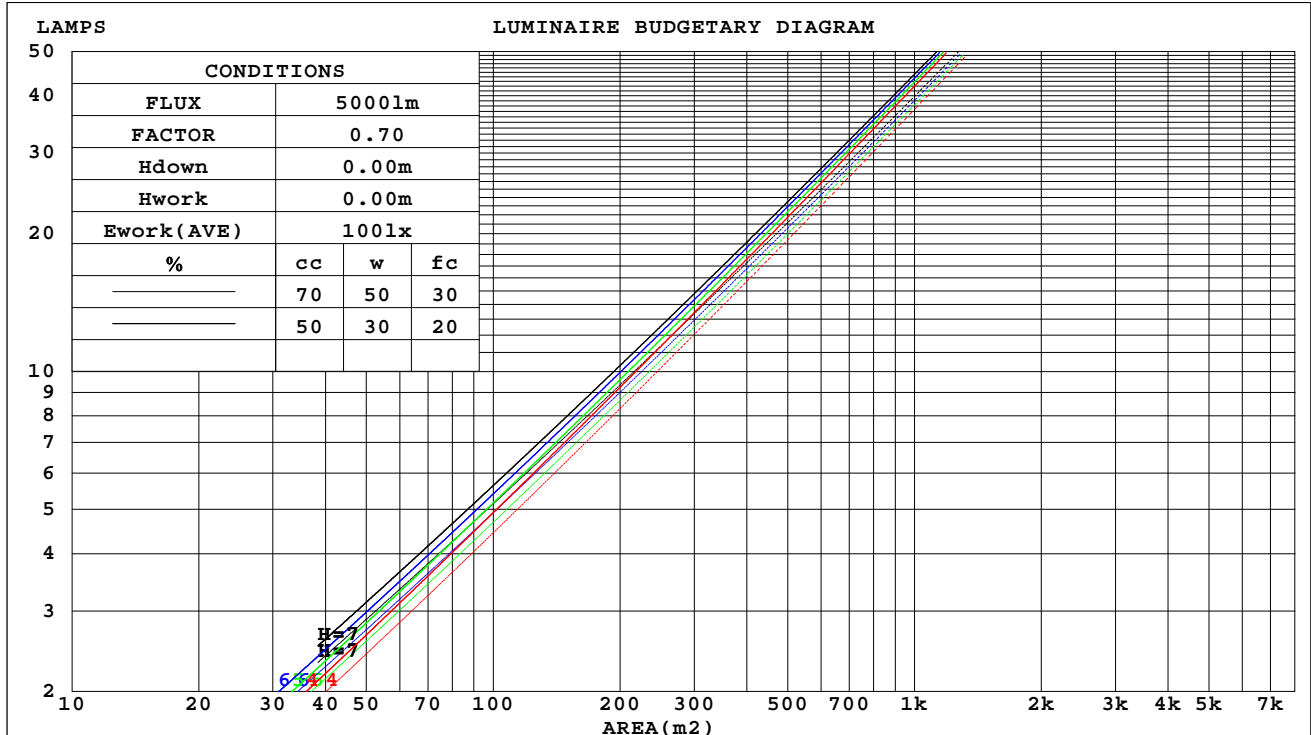

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-8

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXCP-30G-11L-J11-3-A1-00-0-0 Ra:90
LENS:PM-0137 30R
NO DRIVER: 350mA
30minutes warm-up

WEC AND CCEC

Test:U:8.8803V I:0.3499A P:3.1072W PF:1.0000 Freq:49.99Hz Lamp Flux:273.81x1 lm		
NAME: 2468.103B	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405080531
MFR.: RISE	SUR.: 0.00001875m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.104	.059	.019	.100	.057	.018	.091	.052	.017	.084	.048	.015	.077	.044	.014	
2.0	.098	.054	.017	.095	.052	.016	.088	.049	.015	.081	.046	.014	.075	.043	.013	
3.0	.092	.049	.015	.089	.048	.014	.083	.045	.014	.078	.043	.013	.073	.040	.013	
4.0	.087	.045	.013	.084	.044	.013	.079	.042	.013	.075	.040	.012	.070	.038	.012	
5.0	.082	.042	.012	.080	.041	.012	.075	.039	.012	.072	.038	.011	.068	.036	.011	
6.0	.078	.039	.011	.076	.038	.011	.072	.037	.011	.068	.036	.010	.065	.034	.010	
7.0	.074	.036	.010	.072	.036	.010	.069	.035	.010	.066	.034	.010	.063	.033	.010	
8.0	.070	.034	.010	.068	.034	.010	.066	.033	.009	.063	.032	.009	.060	.031	.009	
9.0	.067	.032	.009	.065	.032	.009	.063	.031	.009	.060	.030	.009	.058	.030	.009	
10.0	.064	.031	.008	.062	.030	.008	.060	.030	.008	.058	.029	.008	.056	.028	.008	

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.127	.127	.127	.109	.109	.109	.074	.074	.074	.043	.043	.043	.014	.014	.014	
1.0	.113	.105	.098	.097	.090	.084	.066	.062	.058	.038	.036	.034	.012	.012	.011	
2.0	.102	.088	.077	.087	.076	.067	.060	.053	.046	.035	.031	.027	.011	.010	.009	
3.0	.093	.076	.062	.080	.065	.054	.055	.045	.038	.032	.026	.022	.010	.009	.007	
4.0	.085	.066	.051	.073	.057	.044	.050	.039	.031	.029	.023	.018	.009	.008	.006	
5.0	.079	.058	.042	.067	.050	.037	.046	.035	.026	.027	.020	.015	.009	.007	.005	
6.0	.073	.051	.035	.063	.044	.031	.043	.031	.022	.025	.018	.013	.008	.006	.004	
7.0	.068	.046	.030	.059	.040	.026	.040	.028	.019	.023	.016	.011	.008	.005	.004	
8.0	.064	.041	.026	.055	.036	.023	.038	.025	.016	.022	.015	.010	.007	.005	.003	
9.0	.060	.038	.023	.052	.033	.020	.036	.023	.014	.021	.014	.008	.007	.004	.003	
10.0	.057	.035	.020	.049	.030	.017	.034	.021	.012	.020	.013	.007	.006	.004	.002	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-8

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXCP-30G-11L-J11-3-A1-00-0-0 Ra:90
LENS:PM-0137 30R
NO DRIVER: 350mA
30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:8.8803V I:0.3499A P:3.1072W PF:1.0000 Freq:49.99Hz Lamp Flux:273.81x1 lm										
NAME: 2468.103B					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2405080531		
MFR.: RISE					SUR.: 0.00001875m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	33.6	34.3	33.8	34.5	34.7	34.4	35.2	34.6	35.3	35.5
3H	33.6	34.3	33.9	34.5	34.7	34.5	35.2	34.7	35.4	35.6
4H	33.5	34.2	33.8	34.4	34.7	34.4	35.1	34.7	35.3	35.6
6H	33.5	34.1	33.8	34.4	34.6	34.4	35.0	34.7	35.2	35.5
8H	33.4	34.1	33.7	34.3	34.6	34.3	34.9	34.6	35.2	35.5
12H	33.4	34.0	33.7	34.2	34.5	34.3	34.9	34.6	35.1	35.4
4H 2H	33.7	34.3	33.9	34.5	34.8	34.4	35.1	34.7	35.3	35.5
3H	33.7	34.3	34.0	34.6	34.8	34.5	35.1	34.8	35.4	35.7
4H	33.6	34.2	34.0	34.5	34.8	34.5	35.0	34.8	35.3	35.6
6H	33.6	34.0	33.9	34.4	34.7	34.4	34.9	34.8	35.2	35.5
8H	33.5	34.0	33.9	34.3	34.7	34.3	34.8	34.7	35.1	35.5
12H	33.5	33.9	33.9	34.2	34.6	34.3	34.7	34.7	35.1	35.4
8H 4H	33.5	34.0	33.9	34.3	34.7	34.3	34.8	34.7	35.1	35.5
6H	33.4	33.8	33.9	34.2	34.6	34.2	34.6	34.7	35.0	35.4
8H	33.4	33.7	33.8	34.1	34.6	34.2	34.5	34.6	34.9	35.4
12H	33.3	33.6	33.8	34.0	34.5	34.1	34.4	34.6	34.9	35.3
12H 4H	33.5	33.9	33.9	34.2	34.6	34.3	34.7	34.7	35.1	35.4
6H	33.4	33.7	33.8	34.1	34.6	34.2	34.5	34.6	34.9	35.4
8H	33.3	33.6	33.8	34.0	34.5	34.1	34.4	34.6	34.9	35.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.5 / - 2.7					+ 1.4 / - 2.0				
1.5H	+ 2.4 / - 1.9					+ 2.1 / - 1.4				
2.0H	+ 2.4 / - 2.4					+ 2.6 / - 2.7				

CIE Pub.117, 273.8 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -4.5)
Area: 1.875e-005 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-8

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXCP-30G-11L-J11-3-A1-00-0-0 Ra:90
LENS:PM-0137 30R
NO DRIVER: 350mA
30minutes warm-up

UTILIZATION FACTORS TABLE

Test:U:8.8803V I:0.3499A P:3.1072W PF:1.0000 Freq:49.99Hz Lamp Flux:273.81x1 lm		
NAME: 2468.103B	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405080531
MFR.: RISE	SUR.: 0.00001875m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	53	50	57	53	50	57	53	50	48
0.80	63	58	56	62	58	56	61	58	56	53
1.00	66	62	59	65	61	59	64	61	59	56
1.25	68	65	62	68	64	62	66	64	62	59
1.50	70	67	65	69	67	64	68	66	64	61
2.00	72	69	67	71	69	67	69	67	66	62
2.50	73	71	69	72	70	68	70	68	67	63
3.00	74	72	70	73	71	69	71	69	68	64
4.00	76	74	72	74	73	71	72	71	70	65
5.00	77	75	74	75	74	73	73	72	71	66
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-8

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXCP-30G-11L-J11-3-A1-00-0-0 Ra:90
LENS:PM-0137 30R
NO DRIVER: 350mA
30minutes warm-up

ISOCANDELA DIAGRAM

Test:U:8.8803V I:0.3499A P:3.1072W PF:1.0000 Freq:49.99Hz Lamp Flux:273.81x1 lm		
NAME: 2468.103B	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405080531
MFR.: RISE	SUR.: 0.00001875m2	Shielding Angle:

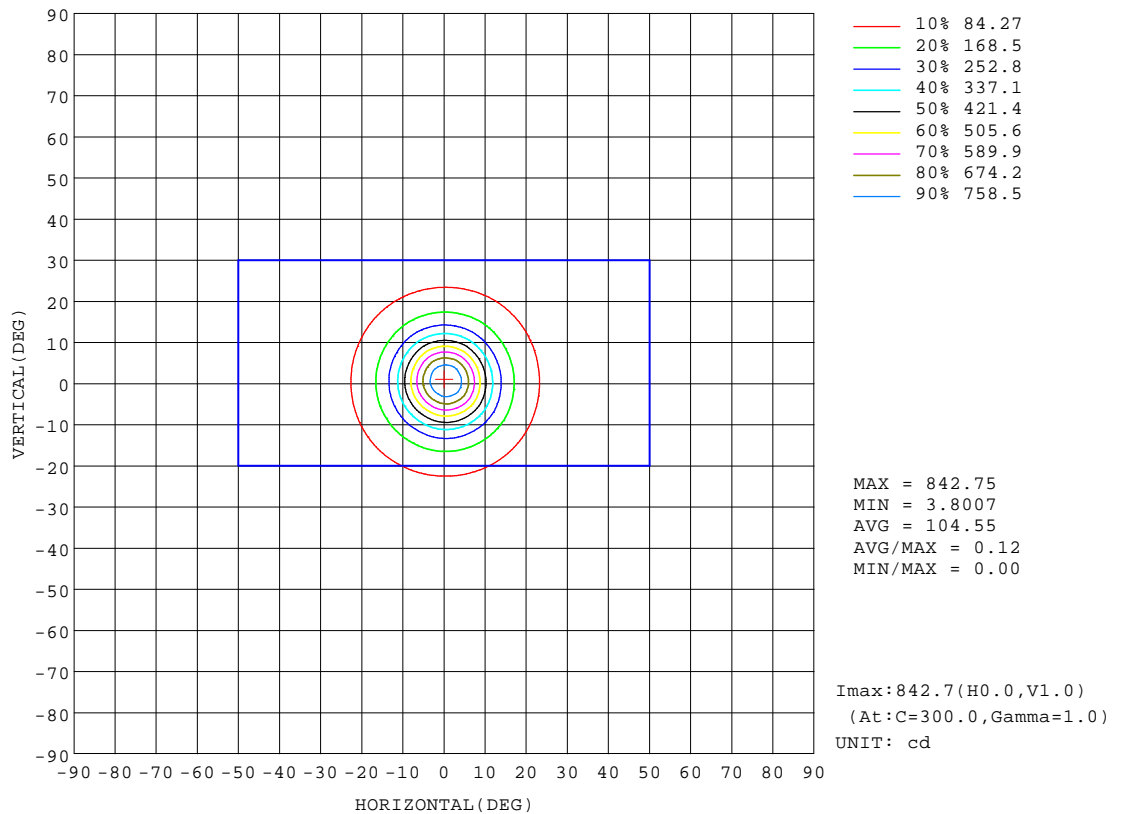


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2024-5-8

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXCP-30G-11L-J11-3-A1-00-0-0 Ra: 90
LENS: PM-0137 30R
NO DRIVER: 350mA
30minutes warm-up

AAI Figure

Test:U:8.8803V I:0.3499A P:3.1072W PF:1.0000 Freq:49.99Hz Lamp Flux:273.81x1 lm		
NAME: 2468.103B	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405080531
MFR.: RISE	SUR.: 0.00001875m2	Shielding Angle:

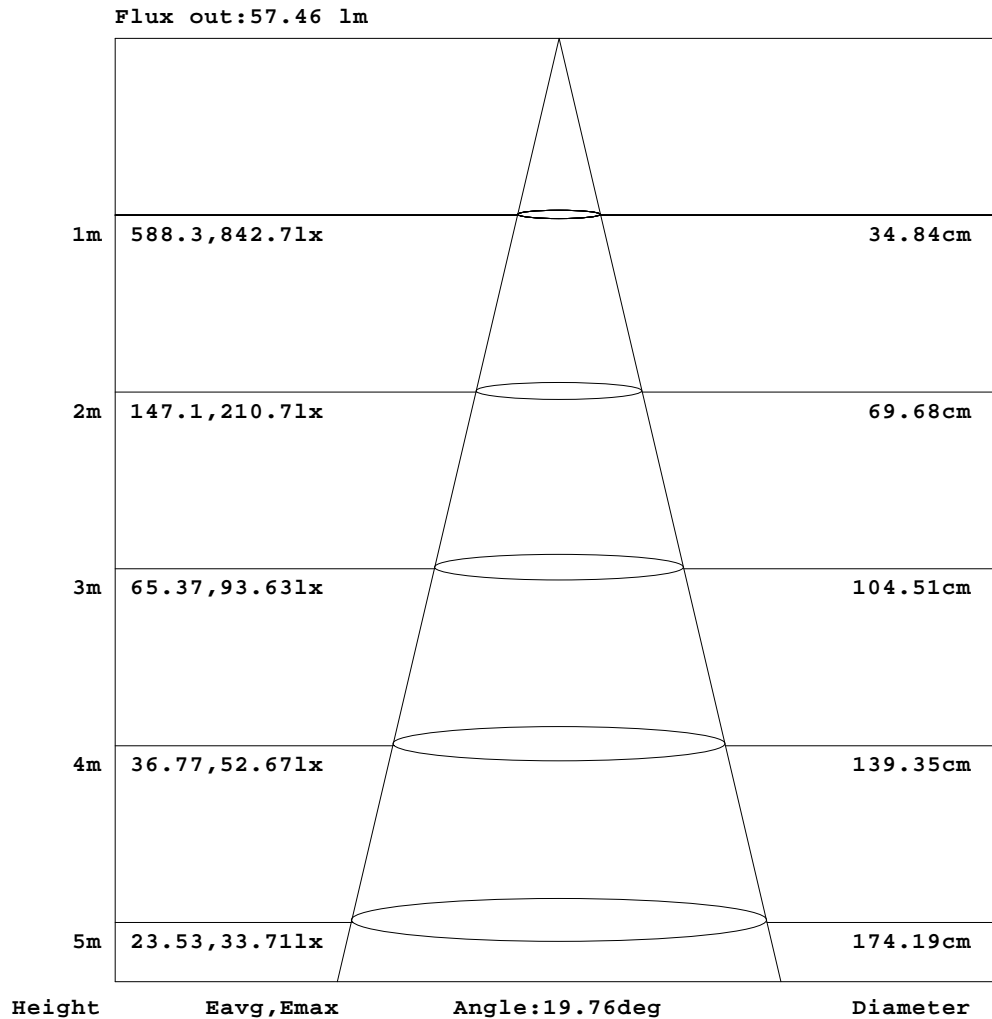

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-8

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXCP-30G-11L-J11-3-A1-00-0-0 Ra:90
LENS:PM-0137 30R
NO DRIVER: 350mA
30minutes warm-up



ISOLUX DIAGRAM

Test:U:8.8803V I:0.3499A P:3.1072W PF:1.0000 Freq:49.99Hz Lamp Flux:273.81x1 lm		
NAME: 2468.103B	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405080531
MFR.: RISE	SUR.: 0.00001875m2	Shielding Angle:

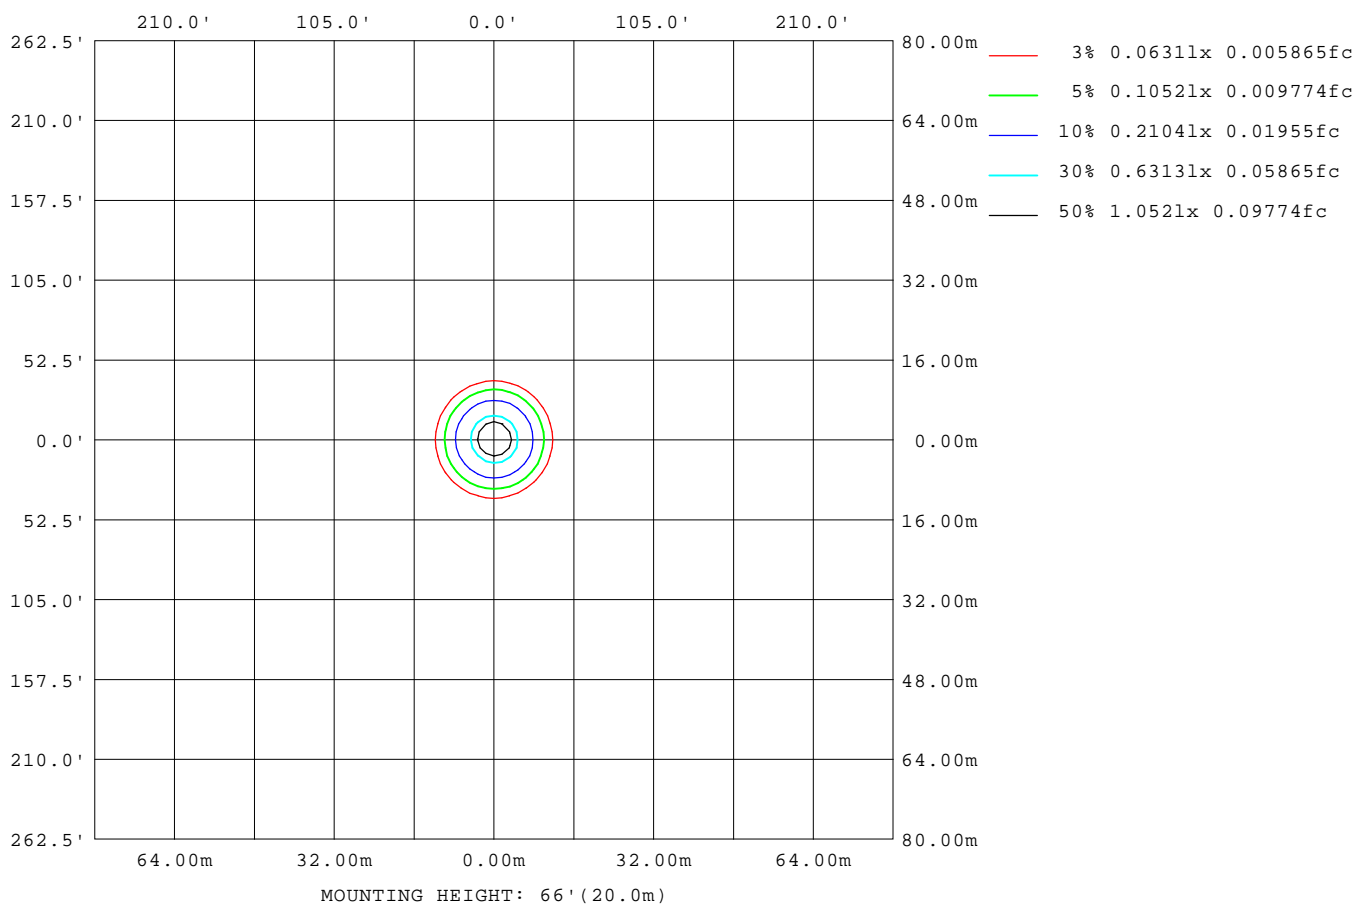

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2024-5-8

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BSCP-30G-11L-J11-3-A1-00-0-0 Ra: 90
LENS: PM-0137 30R
NO DRIVER: 350mA
30minutes warm-up

LED Avg.L Report

Test:U:8.8803V I:0.3499A P:3.1072W PF:1.0000 Freq:49.99Hz Lamp Flux:273.81x1 lm		
NAME: 2468.103B	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405080531
MFR.: RISE	SUR.: 0.00001875m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	234214
L_0~180(75)av	63914
L_0~180(85)av	972
L_90~270(65)av	242849
L_90~270(75)av	59000
L_90~270(85)av	329
L_45(65)av	239334
L_45(75)av	60712
L_45(85)av	911

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-8

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXCP-30G-11L-J11-3-A1-00-0-0 Ra:90
LENS:PM-0137 30R
NO DRIVER: 350mA
30minutes warm-up

Planar Illuminance Curve

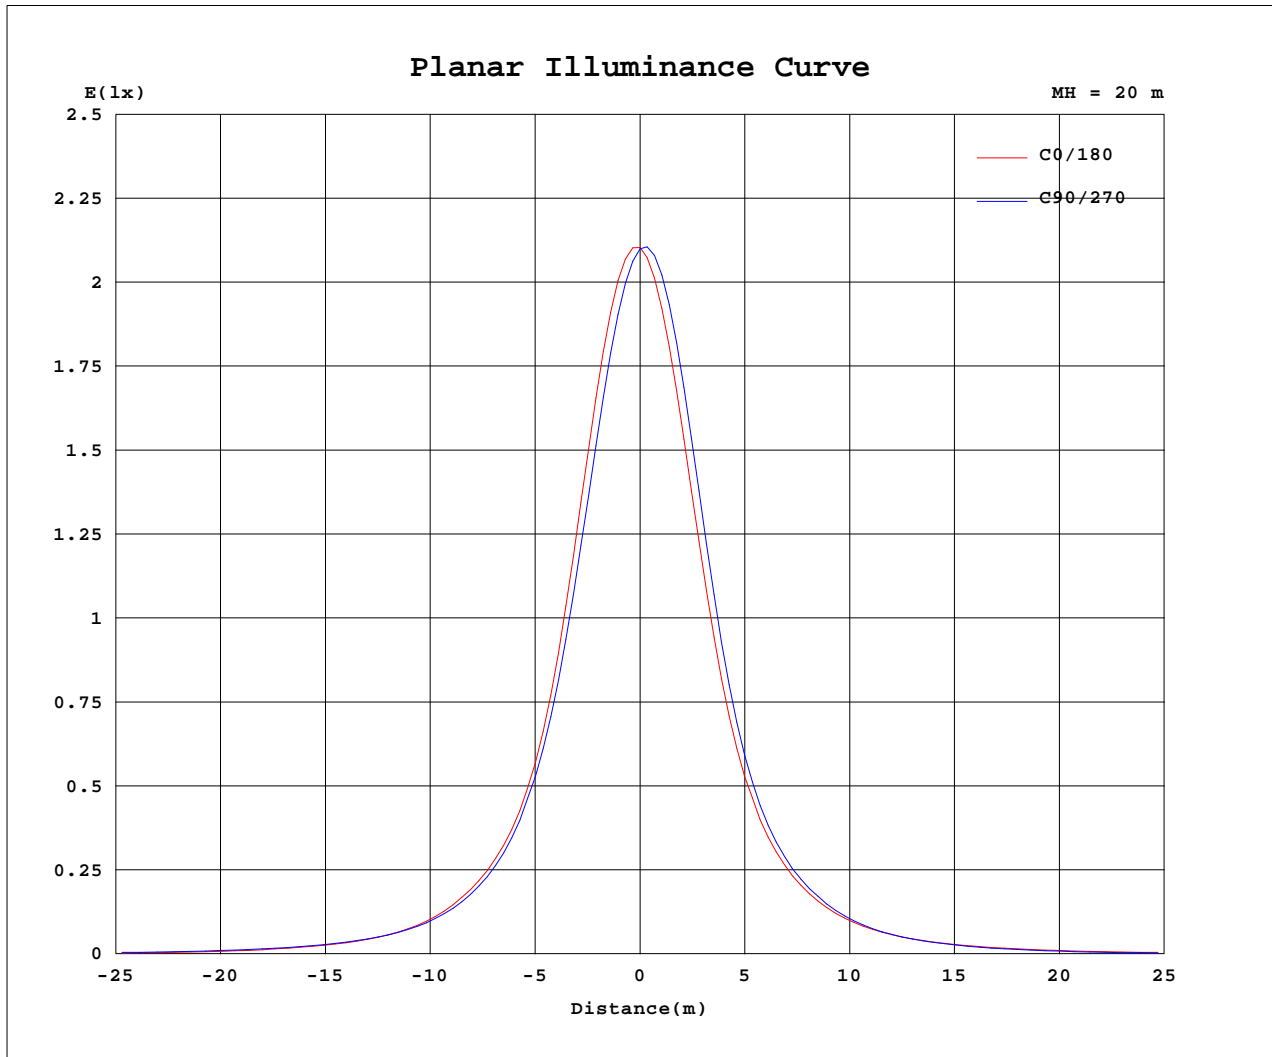

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: zoe
 Test Date: 2024-5-8

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: BXCP-30G-11L-J11-3-A1-00-0-0 Ra: 90
 LENS: PM-0137 30R
 NO DRIVER: 350mA
 30minutes warm-up



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:8.8803V I:0.3499A P:3.1072W PF:1.0000 Freq:49.99Hz Lamp Flux:273.81x1 lm		
NAME: 2468.103B	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405080531
MFR.: RISE	SUR.: 0.00001875m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	840	840	840	840	840	840	840	840	840	840	840	840						
5	724	711	686	670	659	665	677	693	721	737	747	738						
10	433	426	407	392	381	384	395	411	437	448	454	443						
15	218	220	209	205	198	201	206	211	223	227	228	222						
20	120	119	114	111	109	110	112	115	120	122	125	123						
25	68.8	67.6	65.6	64.6	64.2	65.1	65.3	66.2	68.5	70.1	71.5	70.5						
30	40.3	39.9	39.4	39.7	39.8	40.3	40.0	39.9	40.5	41.0	41.6	40.9						
35	24.9	25.0	25.3	26.1	26.4	26.6	26.0	25.8	25.5	25.3	25.4	25.0						
40	15.7	16.1	16.9	17.7	18.2	18.2	17.6	17.2	16.6	16.1	15.7	15.5						
45	9.47	10.2	11.1	12.0	12.6	12.6	12.0	11.4	10.6	9.85	9.37	9.28						
50	6.04	6.68	7.50	8.33	8.79	8.84	8.32	7.75	6.93	6.19	5.84	5.84						
55	4.25	4.67	5.28	5.91	6.25	6.26	5.93	5.45	4.80	4.30	4.06	4.09						
60	2.86	3.19	3.64	4.08	4.28	4.26	4.01	3.69	3.24	2.89	2.73	2.75						
65	1.54	1.74	2.01	2.28	2.35	2.31	2.18	1.99	1.76	1.57	1.48	1.51						
70	0.71	0.79	0.88	0.96	0.97	0.96	0.94	0.87	0.79	0.73	0.69	0.72						
75	0.26	0.28	0.29	0.32	0.33	0.37	0.36	0.31	0.27	0.26	0.24	0.27						
80	0.14	0.15	0.16	0.17	0.19	0.20	0.19	0.17	0.15	0.13	0.12	0.14						
85	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-8

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXCP-30G-11L-J11-3-A1-00-0-0 Ra:90
LENS:PM-0137 30R
NO DRIVER: 350mA
30minutes warm-up