


Luminaire Photograph

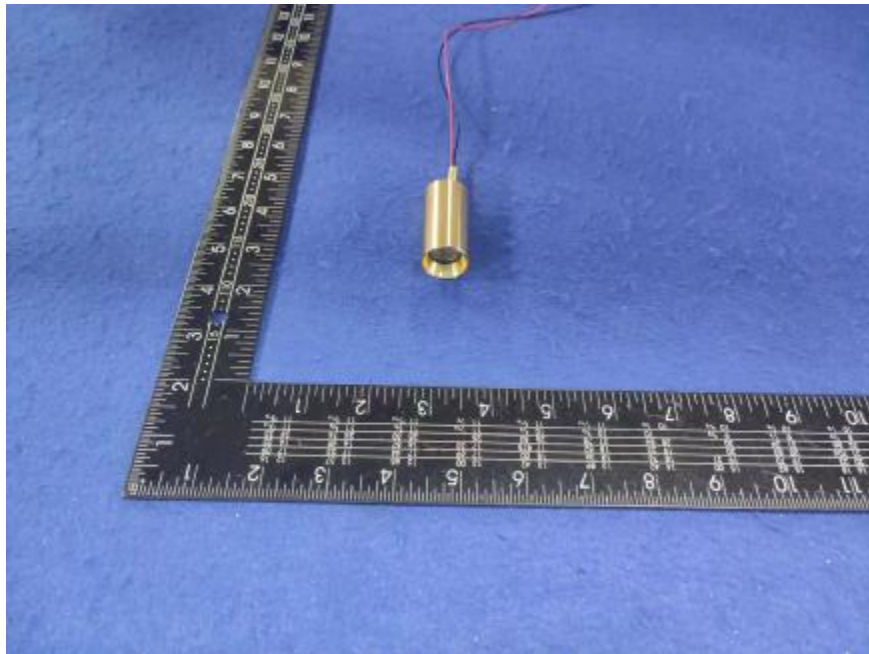

Light Output Ratio:	85.1%	
Luminaire Power:	2.351 W	
SHR Nominal:	0.50	Calculated using the TM5
SHR Maximum:	0.50	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2024-10-17

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXEX-30G-11H-3A-00-0-0 Ra: 90
LENS: 25R
NOT DRIVER: 700mA
30minutes warm-up

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

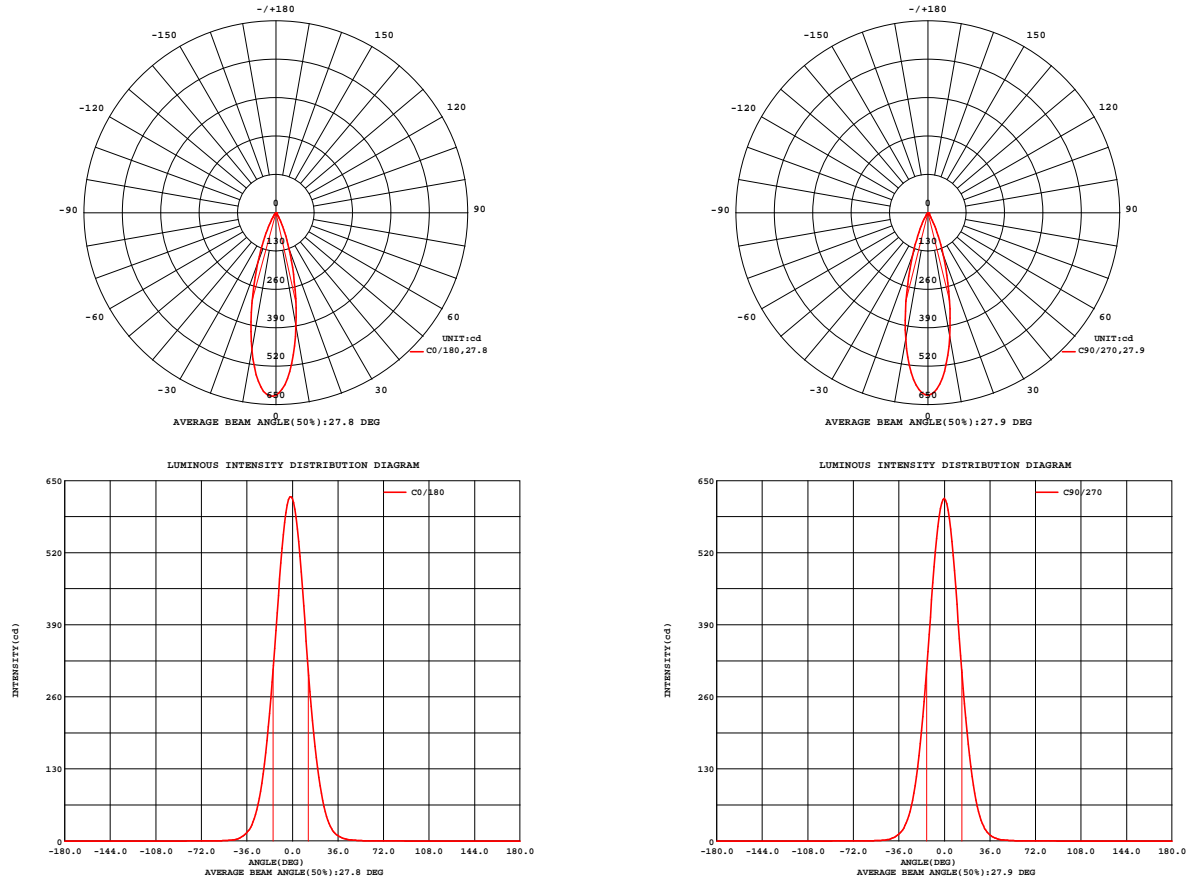


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2024-10-17

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXEX-30G-11H-3A-00-0-0 Ra: 90
LENS: 25R
NOT DRIVER: 700mA
30minutes warm-up

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:3.3588V I:0.7000A P:2.3512W PF:1.0000 Freq:49.99Hz Lamp Flux:203.982x1 lm		
NAME: 2468.106	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2410171256
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 73.87 lm/W			
MODEL	Brideglux	I _{max} (cd)	621.0	S/MH(C0/180)	0.51
NOMINAL POWER(W)	2	LOR(%)	85.1	S/MH(C90/270)	0.47
RATED VOLTAGE(V)	4	TOTAL FLUX(lm)	173.68	UP,DN(C0-180)	0.0,41.5
NOMINAL FLUX(lm)	203.982	CIE CLASS	DIRECT	UP,DN(C180-360)	0.0,43.6
LAMPS INSIDE	1	up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	4	down(%)	85.1	CIBSE SHR MAX	0.50

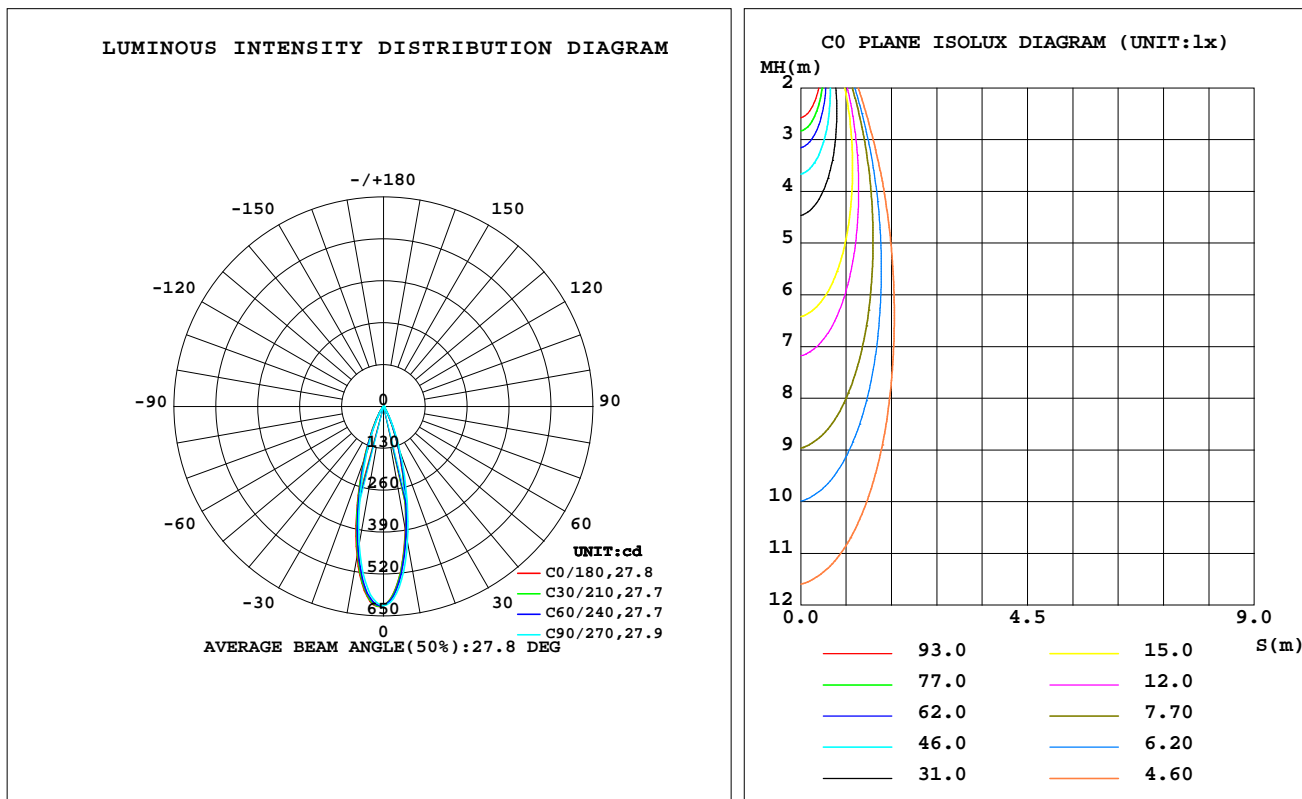

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-10-17

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90
LENS:25R
NOT DRIVER:700mA
30minutes warm-up

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

	C0	C45	C90	C135	C180	C225	C270	C315		zone	total	%lum,lamp
10	392.2	399.5	426.9	455.1	472.7	459.9	435.2	407.9	0- 10	49.56	49.56	28.5,24.3
20	132.0	136.5	153.8	172.4	180.9	171.1	153.8	138.1	10- 20	76.10	125.7	72.3,61.6
30	26.55	27.50	31.55	36.25	40.41	36.64	32.56	27.70	20- 30	35.68	161.3	92.9,79.1
40	5.082	5.153	5.666	6.335	7.703	6.822	6.208	5.142	30- 40	9.525	170.9	98.4,83.8
50	1.171	1.218	1.192	1.110	1.177	1.160	1.141	1.125	40- 50	2.086	172.9	99.6,84.8
60	0.2796	0.2997	0.2972	0.3088	0.3183	0.3138	0.2904	0.2745	50- 60	0.5875	173.5	99.9,85.1
70	0.0491	0.0485	0.0487	0.0475	0.0412	0.0448	0.0445	0.0404	60- 70	0.1228	173.7	100,85.1
80	0.0062	0.0043	0.0056	0.0028	0.0031	0.0019	0.0068	0.0046	70- 80	0.0197	173.7	100,85.1
90	0	0	0	0	0	0	0	0	80- 90	0.0010	173.7	100,85.1
100	0	0	0	0	0	0	0	0	90-100	0	173.7	100,85.1
110	0	0	0	0	0	0	0	0	100-110	0	173.7	100,85.1
120	0	0	0	0	0	0	0	0	110-120	0	173.7	100,85.1
130	0	0	0	0	0	0	0	0	120-130	0	173.7	100,85.1
140	0	0	0	0	0	0	0	0	130-140	0	173.7	100,85.1
150	0	0	0	0	0	0	0	0	140-150	0	173.7	100,85.1
160	0	0	0	0	0	0	0	0	150-160	0	173.7	100,85.1
170	0	0	0	0	0	0	0	0	160-170	0	173.7	100,85.1
180	0	0	0	0	0	0	0	0	170-180	0	173.7	100,85.1
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-10-17

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90
LENS:25R
NOT DRIVER:700mA
30minutes warm-up

LUMINANCE LIMITATION CURVES

Test:U:3.3588V I:0.7000A P:2.3512W PF:1.0000 Freq:49.99Hz
Lamp Flux:203.982x1 lm

NAME: 2468.106

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2410171256

MFR.: RISE

SUR.: 0.000346185m2

Shielding Angle:

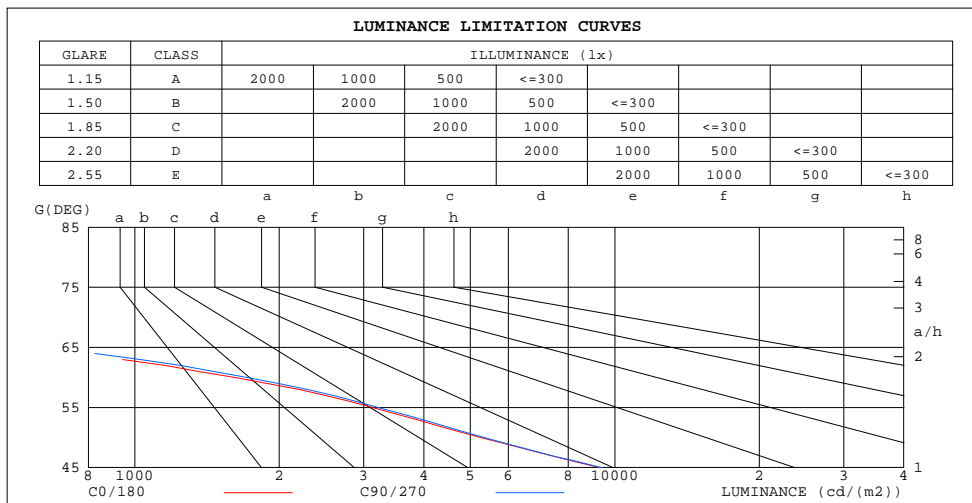

LUMINANCE cd/(m2)		
G(180)	C0/180	C90/270
85	31	82
80	104	93
75	212	194
70	415	411
65	651	677
60	1617	1716
55	3134	3217
50	5268	5354
45	9328	9407


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-10-17

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90
LENS:25R
NOT DRIVER:700mA
30minutes warm-up

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:3.3588V I:0.7000A P:2.3512W PF:1.0000 Freq:49.99Hz Lamp Flux:203.982x1 lm		
NAME: 2468.106	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2410171256
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

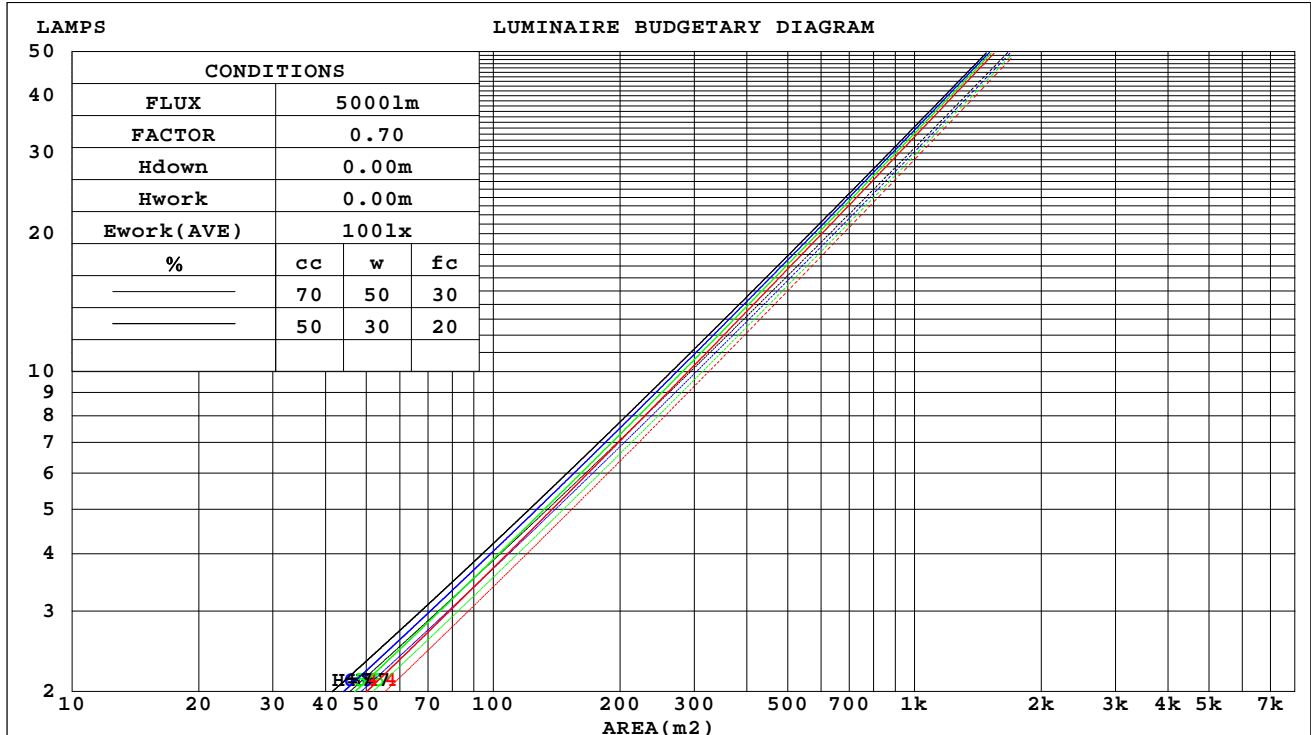

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-10-17

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90
LENS:25R
NOT DRIVER:700mA
30minutes warm-up

WEC AND CCEC

Test:U:3.3588V I:0.7000A P:2.3512W PF:1.0000 Freq:49.99Hz Lamp Flux:203.982x1 lm		
NAME: 2468.106	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2410171256
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.122	.070	.022	.117	.067	.021	.106	.061	.019	.096	.056	.018	.087	.051	.016	
2.0	.114	.063	.019	.110	.060	.019	.101	.056	.017	.093	.052	.016	.085	.048	.015	
3.0	.107	.057	.017	.103	.055	.017	.096	.052	.016	.089	.049	.015	.083	.046	.014	
4.0	.101	.052	.015	.098	.051	.015	.091	.048	.014	.086	.046	.014	.080	.044	.013	
5.0	.095	.049	.014	.093	.048	.014	.087	.045	.013	.082	.043	.013	.078	.042	.012	
6.0	.091	.045	.013	.088	.045	.013	.084	.043	.012	.079	.041	.012	.075	.040	.012	
7.0	.086	.043	.012	.084	.042	.012	.080	.041	.012	.076	.039	.011	.073	.038	.011	
8.0	.082	.040	.011	.081	.040	.011	.077	.039	.011	.074	.037	.011	.071	.036	.011	
9.0	.079	.038	.011	.077	.038	.011	.074	.037	.010	.071	.036	.010	.068	.035	.010	
10.0	.076	.036	.010	.074	.036	.010	.072	.035	.010	.069	.034	.010	.066	.033	.010	

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.162	.162	.162	.139	.139	.139	.095	.095	.095	.054	.054	.054	.017	.017	.017	
1.0	.144	.134	.126	.123	.115	.108	.084	.079	.075	.048	.046	.043	.016	.015	.014	
2.0	.129	.113	.100	.110	.097	.086	.076	.067	.060	.044	.039	.035	.014	.013	.011	
3.0	.116	.096	.081	.100	.083	.070	.069	.058	.049	.040	.034	.029	.013	.011	.009	
4.0	.106	.084	.066	.091	.072	.058	.063	.050	.041	.036	.029	.024	.012	.010	.008	
5.0	.097	.073	.055	.084	.063	.048	.058	.044	.034	.033	.026	.020	.011	.008	.007	
6.0	.090	.065	.046	.078	.056	.040	.053	.039	.029	.031	.023	.017	.010	.008	.006	
7.0	.084	.058	.040	.072	.050	.035	.050	.035	.024	.029	.021	.015	.009	.007	.005	
8.0	.079	.052	.034	.068	.045	.030	.047	.032	.021	.027	.019	.013	.009	.006	.004	
9.0	.074	.047	.030	.064	.041	.026	.044	.029	.018	.026	.017	.011	.008	.006	.004	
10.0	.070	.044	.026	.060	.038	.023	.042	.027	.016	.024	.016	.010	.008	.005	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-10-17

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90
LENS:25R
NOT DRIVER:700mA
30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:3.3588V I:0.7000A P:2.3512W PF:1.0000 Freq:49.99Hz Lamp Flux:203.982x1 lm										
NAME: 2468.106					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2410171256		
MFR.: RISE					SUR.: 0.000346185m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.1	17.8	17.3	17.9	18.1	17.5	18.2	17.7	18.4	18.5
3H	16.9	17.6	17.2	17.8	17.9	17.4	18.0	17.6	18.2	18.4
4H	16.8	17.5	17.1	17.7	17.9	17.3	17.9	17.5	18.1	18.3
6H	16.8	17.3	17.0	17.6	17.8	17.2	17.8	17.5	18.0	18.3
8H	16.7	17.3	17.0	17.5	17.8	17.2	17.7	17.4	18.0	18.2
12H	16.7	17.2	17.0	17.5	17.7	17.1	17.6	17.4	17.9	18.2
4H 2H	16.9	17.5	17.1	17.7	17.9	17.3	17.9	17.6	18.1	18.3
3H	16.7	17.2	17.0	17.5	17.8	17.1	17.7	17.4	17.9	18.2
4H	16.6	17.1	16.9	17.4	17.7	17.0	17.5	17.4	17.8	18.1
6H	16.5	16.9	16.9	17.3	17.6	16.9	17.4	17.3	17.7	18.0
8H	16.4	16.8	16.8	17.2	17.6	16.9	17.3	17.3	17.6	18.0
12H	16.4	16.8	16.8	17.1	17.5	16.8	17.2	17.2	17.6	18.0
8H 4H	16.4	16.8	16.8	17.2	17.6	16.9	17.3	17.3	17.6	18.0
6H	16.3	16.7	16.7	17.1	17.5	16.8	17.1	17.2	17.5	17.9
8H	16.3	16.6	16.7	17.0	17.4	16.7	17.0	17.2	17.4	17.9
12H	16.2	16.5	16.7	16.9	17.4	16.6	16.9	17.1	17.3	17.8
12H 4H	16.4	16.8	16.8	17.1	17.5	16.8	17.2	17.2	17.6	18.0
6H	16.3	16.6	16.7	17.0	17.4	16.7	17.0	17.2	17.4	17.9
8H	16.2	16.5	16.7	16.9	17.4	16.6	16.9	17.1	17.3	17.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.3 / - 9.2					+ 3.9 / - 9.4				
1.5H	+ 5.2 / - 6.1					+ 5.9 / - 6.5				
2.0H	+ 5.1 / - 8.8					+ 5.1 / - 8.8				

CIE Pub.117, 204.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -5.5)
Area: 0.000346185 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-10-17

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90
LENS:25R
NOT DRIVER:700mA
30minutes warm-up

UTILIZATION FACTORS TABLE

Test:U:3.3588V I:0.7000A P:2.3512W PF:1.0000 Freq:49.99Hz Lamp Flux:203.982x1 lm		
NAME: 2468.106	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2410171256
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	77	72	69	77	72	69	76	72	69	66
0.80	83	79	76	83	78	76	82	78	75	72
1.00	86	82	79	86	82	79	84	81	79	76
1.25	89	85	83	89	85	82	87	84	82	78
1.50	92	88	85	91	87	85	89	86	84	80
2.00	93	90	88	92	89	87	90	88	86	82
2.50	95	92	89	93	91	89	91	89	87	82
3.00	96	93	91	94	92	90	92	90	88	83
4.00	97	95	94	96	94	92	93	91	90	84
5.00	98	97	95	97	95	94	93	92	91	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-10-17

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90
LENS:25R
NOT DRIVER:700mA
30minutes warm-up

ISOCANDELA DIAGRAM

Test:U:3.3588V I:0.7000A P:2.3512W PF:1.0000 Freq:49.99Hz Lamp Flux:203.982x1 lm		
NAME: 2468.106	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2410171256
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

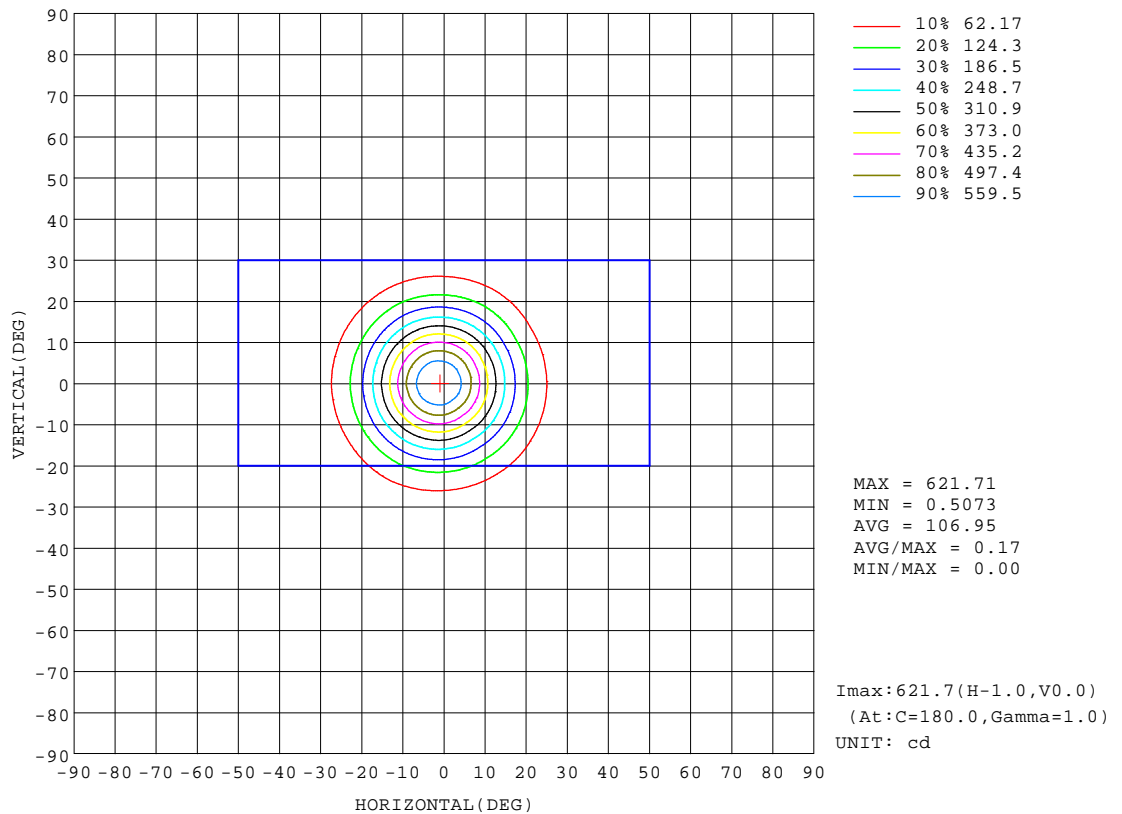


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-10-17

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90
LENS:25R
NOT DRIVER:700mA
30minutes warm-up

AAI Figure

Test:U:3.3588V I:0.7000A P:2.3512W PF:1.0000 Freq:49.99Hz Lamp Flux:203.982x1 lm		
NAME: 2468.106	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2410171256
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

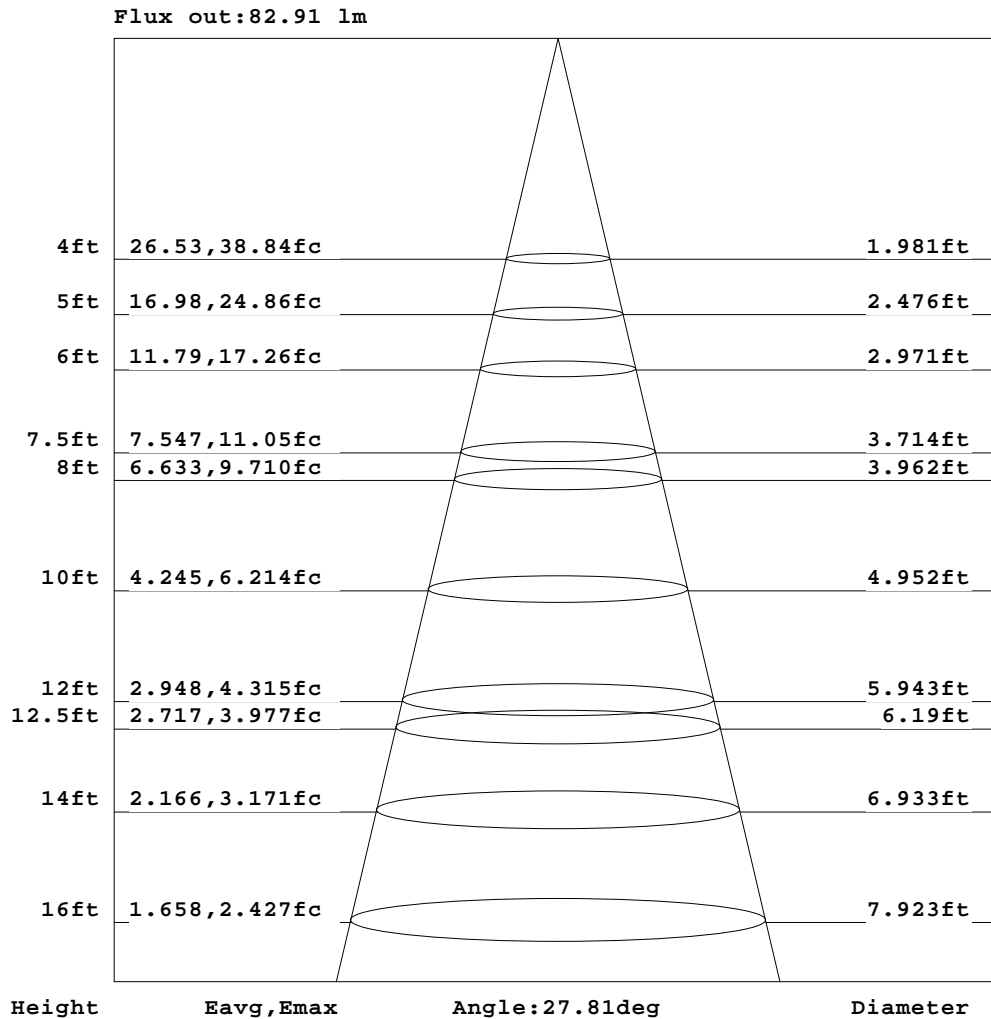


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: zoe
Test Date: 2024-10-17

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXEX-30G-11H-3A-00-0-0 Ra: 90
LENS: 25R
NOT DRIVER: 700mA
30minutes warm-up

ISOLUX DIAGRAM

Test:U:3.3588V I:0.7000A P:2.3512W PF:1.0000 Freq:49.99Hz Lamp Flux:203.982x1 lm		
NAME: 2468.106	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2410171256
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

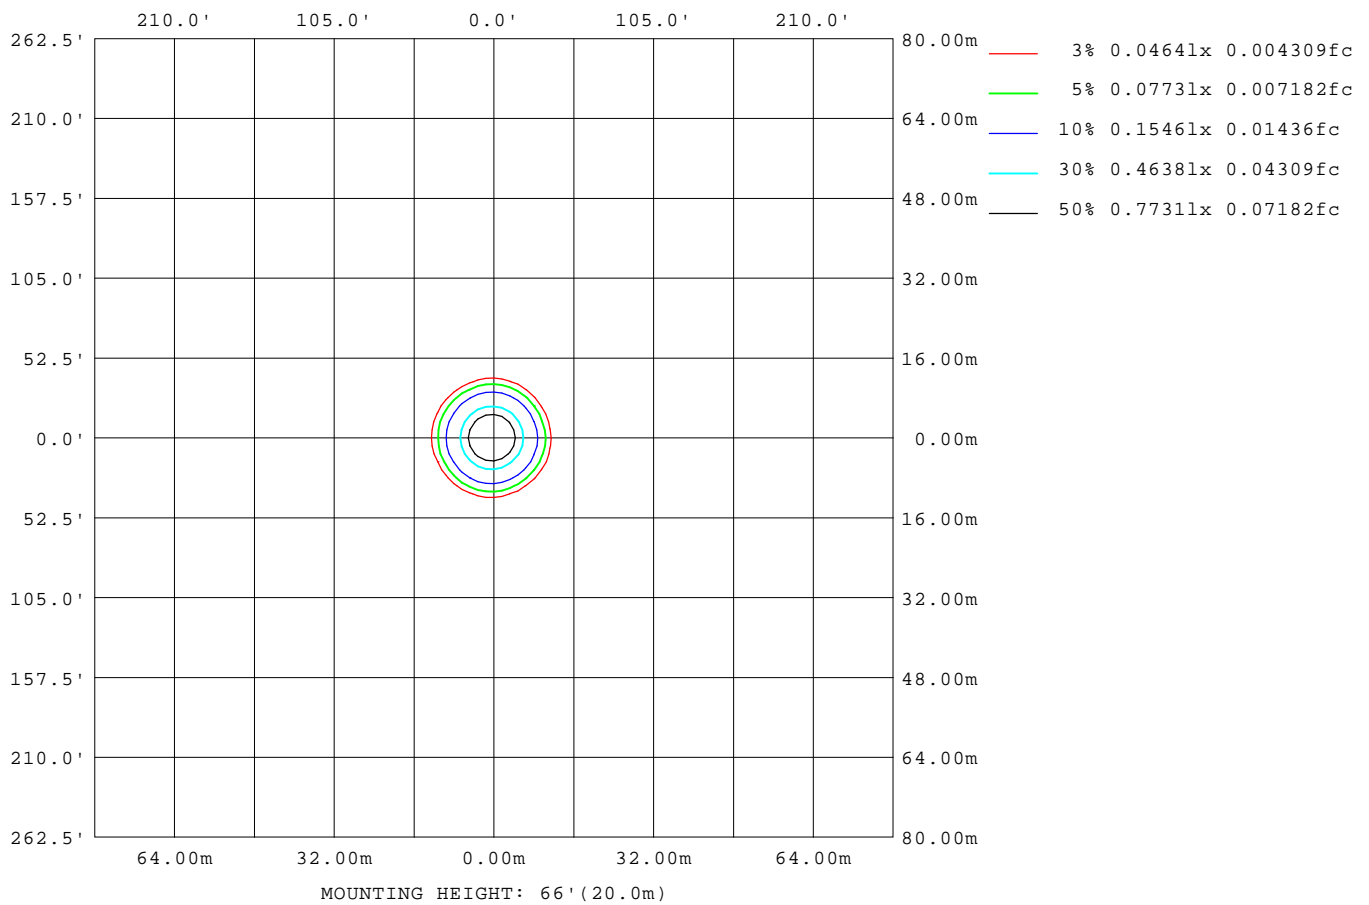

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2024-10-17

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXEX-30G-11H-3A-00-0-0 Ra: 90
LENS: 25R
NOT DRIVER: 700mA
30minutes warm-up

LED Avg.L Report

Test:U:3.3588V I:0.7000A P:2.3512W PF:1.0000 Freq:49.99Hz Lamp Flux:203.982x1 lm		
NAME: 2468.106	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2410171256
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	652
L_0~180(75)av	176
L_0~180(85)av	16
L_90~270(65)av	641
L_90~270(75)av	182
L_90~270(85)av	66
L_45(65)av	644
L_45(75)av	158
L_45(85)av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-10-17

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90
LENS:25R
NOT DRIVER:700mA
30minutes warm-up

Planar Illuminance Curve

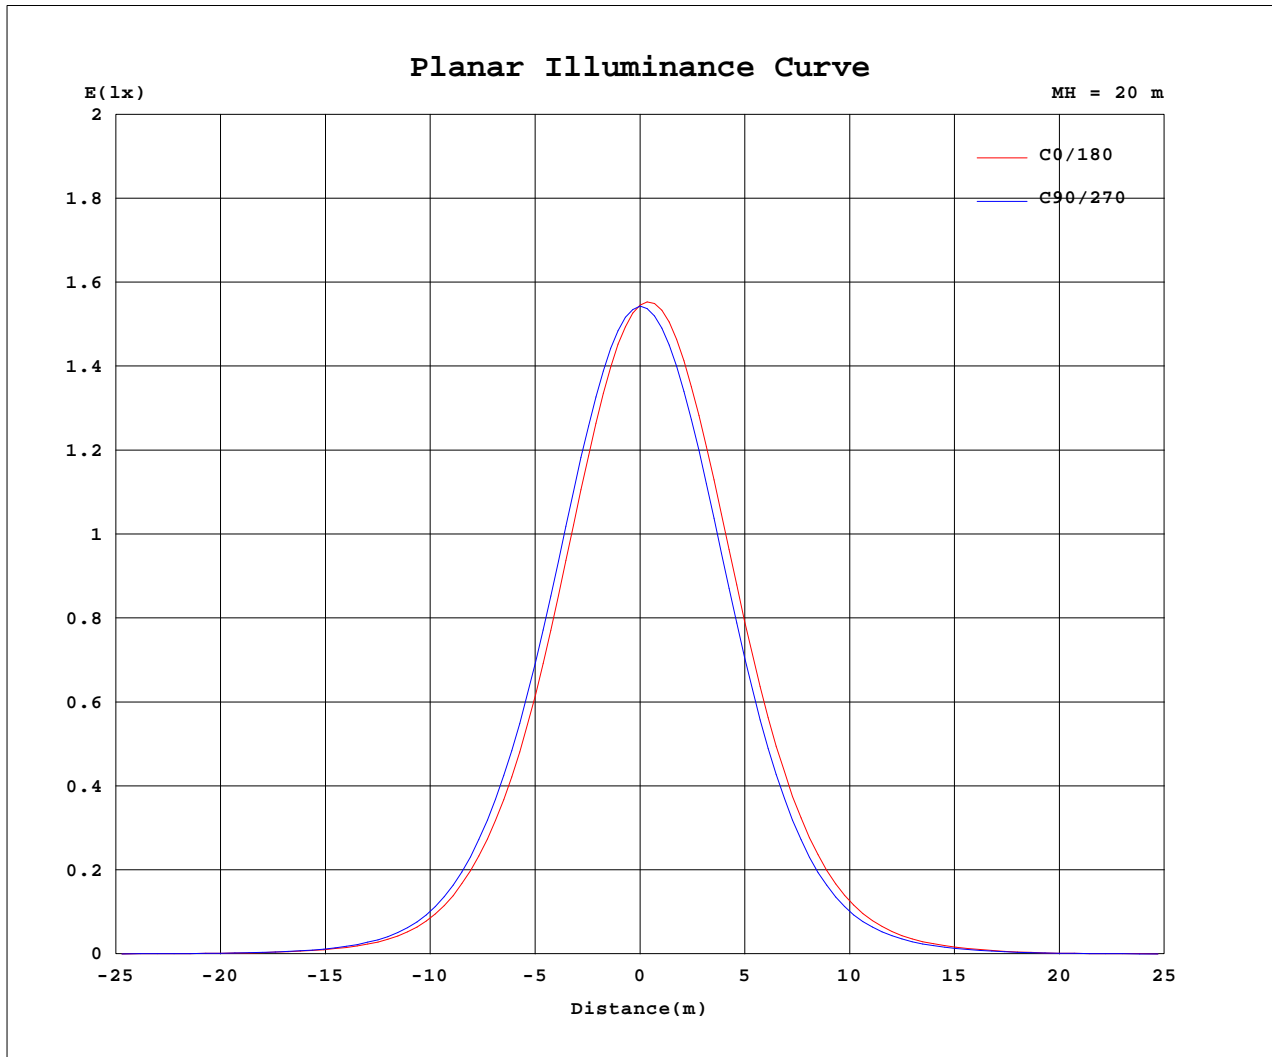

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: zoe
 Test Date: 2024-10-17

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: BXEX-30G-11H-3A-00-0-0 Ra: 90
 LENS: 25R
 NOT DRIVER: 700mA
 30minutes warm-up



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:3.3588V I:0.7000A P:2.3512W PF:1.0000 Freq:49.99Hz Lamp Flux:203.982x1 lm		
NAME: 2468.106	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2410171256
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	618	618	618	618	618	618	618	618	618	618	618	618						
5	540	542	548	562	575	587	592	588	581	567	555	543						
10	392	395	404	427	447	464	473	465	455	435	417	399						
15	243	247	253	275	295	311	317	310	298	280	264	248						
20	132	134	139	154	169	176	181	175	167	154	145	132						
25	62.2	62.6	66.0	73.5	83.5	84.5	90.0	85.8	80.6	73.2	68.7	60.8						
30	26.6	27.2	27.8	31.5	35.8	36.7	40.4	38.7	34.6	32.6	29.6	25.8						
35	11.5	12.0	11.6	13.5	14.7	15.7	17.9	17.6	14.7	14.6	12.7	11.2						
40	5.08	5.26	5.05	5.67	6.12	6.55	7.70	7.60	6.04	6.21	5.42	4.87						
45	2.28	2.34	2.32	2.30	2.27	2.28	2.51	2.49	2.29	2.31	2.27	2.13						
50	1.17	1.22	1.21	1.19	1.13	1.09	1.18	1.18	1.14	1.14	1.16	1.09						
55	0.62	0.66	0.65	0.64	0.62	0.61	0.65	0.66	0.63	0.63	0.63	0.59						
60	0.28	0.30	0.30	0.30	0.31	0.31	0.32	0.32	0.31	0.29	0.29	0.26						
65	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.09	0.09	0.09	0.09						
70	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.05	0.04	0.04	0.04	0.04						
75	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.02	0.01	0.01						
80	0.01	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00						
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-10-17

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90
LENS:25R
NOT DRIVER:700mA
30minutes warm-up