


### Luminaire Photograph

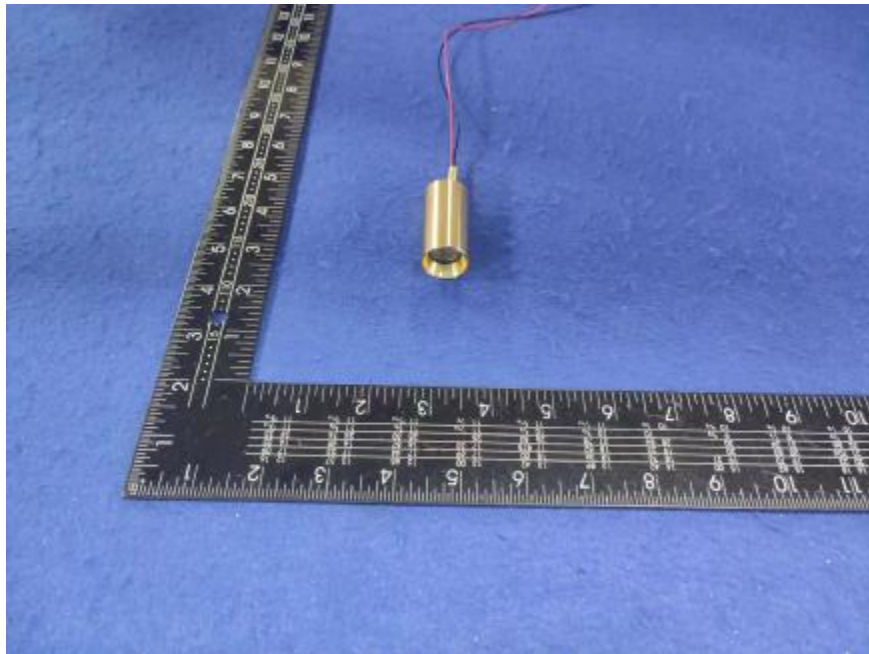

Light Output Ratio:	75.7%	
Luminaire Power:	2.303 W	
SHR Nominal:	0.50	Calculated using the TM5
SHR Maximum:	0.55	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2024-10-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXEX-30G-11H-3A-00-0-0 Ra: 90  
LENS: 30R  
NOT DRIVER: 700mA  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

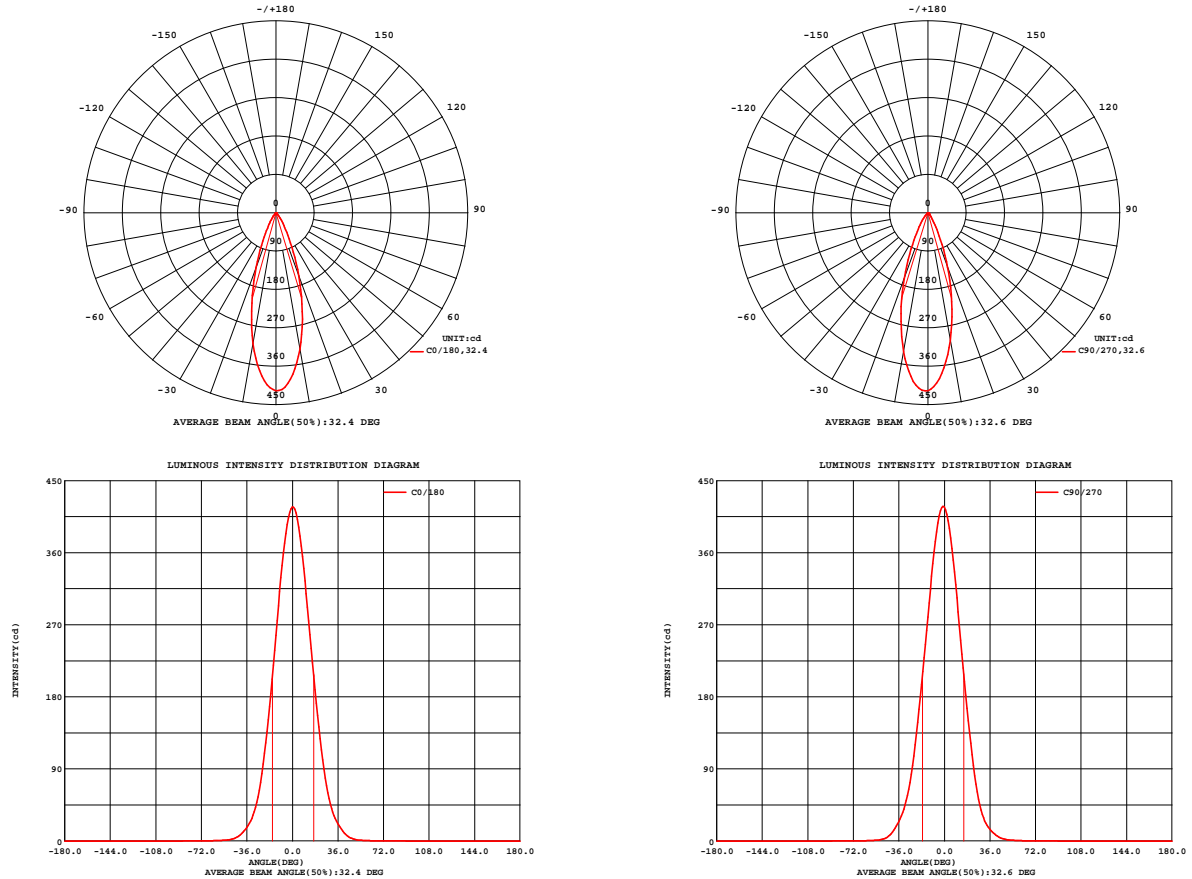


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2024-10-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXEX-30G-11H-3A-00-0-0 Ra: 90  
LENS: 30R  
NOT DRIVER: 700mA  
30minutes warm-up

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:3.2896V I:0.7000A P:2.3027W PF:1.0000 Freq:49.99Hz Lamp Flux:203.982x1 lm		
NAME: 2468.106	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2410171257
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 67.03 lm/W			
MODEL	Brideglux	I <sub>max</sub> (cd)	418.4	S/MH(C0/180)	0.52
NOMINAL POWER(W)	2	LOR(%)	75.7	S/MH(C90/270)	0.56
RATED VOLTAGE(V)	4	TOTAL FLUX(lm)	154.36	UP,DN(C0-180)	0.0,35.8
NOMINAL FLUX(lm)	203.982	CIE CLASS	DIRECT	UP,DN(C180-360)	0.0,39.8
LAMPS INSIDE	1	up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	4	down(%)	75.7	CIBSE SHR MAX	0.55

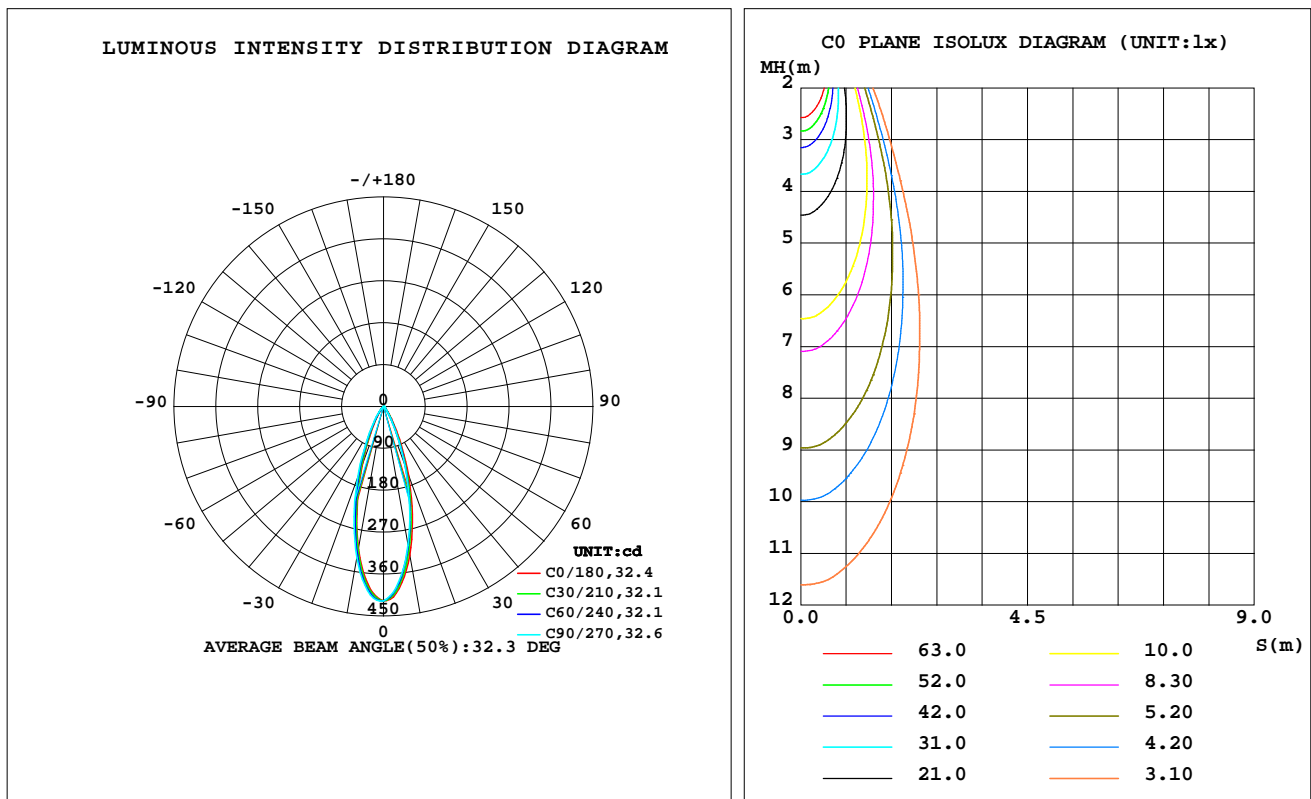

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-10-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90  
LENS:30R  
NOT DRIVER:700mA  
30minutes warm-up

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

	C0	C45	C90	C135	C180	C225	C270	C315		zone	total	%lum,lamp
10	324.9	310.4	303.4	301.7	311.2	320.0	330.6	334.0	0- 10	34.71	34.71	22.5,17
20	156.9	141.9	135.7	129.9	136.2	149.2	164.4	165.6	10- 20	62.63	97.34	63.1,47.7
30	46.09	37.01	33.06	30.82	36.44	42.98	50.37	51.06	20- 30	38.16	135.5	87.8,66.4
40	12.32	9.709	8.544	7.741	9.478	11.57	13.41	13.62	30- 40	14.09	149.6	96.9,73.3
50	1.708	1.666	1.550	1.439	1.500	1.576	1.687	1.676	40- 50	3.664	153.3	99.3,75.1
60	0.5287	0.5124	0.5344	0.5305	0.5380	0.5267	0.5305	0.5260	50- 60	0.7953	154.1	99.8,75.5
70	0.1056	0.1094	0.1268	0.1253	0.1255	0.1065	0.0942	0.0937	60- 70	0.2502	154.3	100,75.6
80	0.0134	0.0118	0.0167	0.0166	0.0186	0.0124	0.0115	0.0084	70- 80	0.0476	154.4	100,75.7
90	0	0	0	0	0	0	0	0	80- 90	0.0041	154.4	100,75.7
100	0	0	0	0	0	0	0	0	90-100	0	154.4	100,75.7
110	0	0	0	0	0	0	0	0	100-110	0	154.4	100,75.7
120	0	0	0	0	0	0	0	0	110-120	0	154.4	100,75.7
130	0	0	0	0	0	0	0	0	120-130	0	154.4	100,75.7
140	0	0	0	0	0	0	0	0	130-140	0	154.4	100,75.7
150	0	0	0	0	0	0	0	0	140-150	0	154.4	100,75.7
160	0	0	0	0	0	0	0	0	150-160	0	154.4	100,75.7
170	0	0	0	0	0	0	0	0	160-170	0	154.4	100,75.7
180	0	0	0	0	0	0	0	0	170-180	0	154.4	100,75.7
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-10-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90  
LENS:30R  
NOT DRIVER:700mA  
30minutes warm-up

### LUMINANCE LIMITATION CURVES

Test:U:3.2896V I:0.7000A P:2.3027W PF:1.0000 Freq:49.99Hz  
Lamp Flux:203.982x1 lm

NAME: 2468.106

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2410171257

MFR.: RISE

SUR.: 0.000346185m2

Shielding Angle:

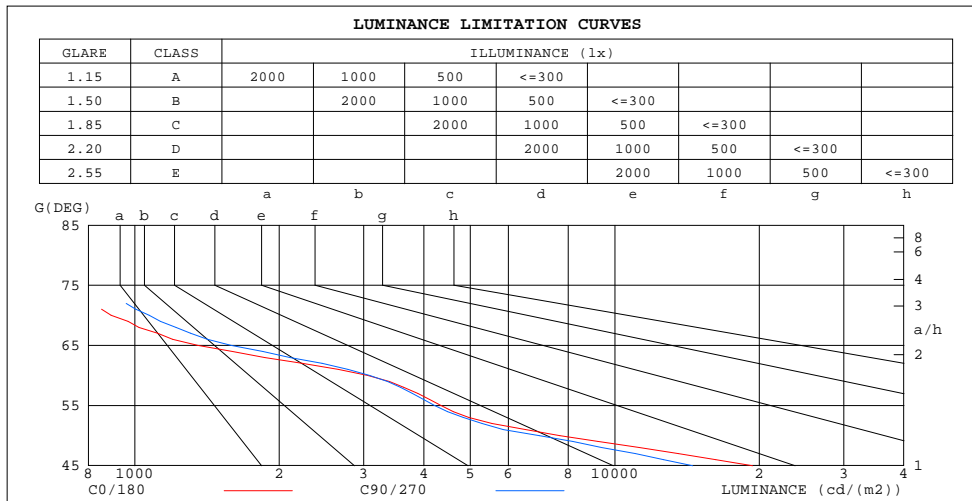

LUMINANCE cd/(m2)		
G(180)	C0/180	C90/270
85	0	175
80	223	278
75	364	439
70	893	1071
65	1353	1588
60	3057	3088
55	4349	4217
50	7682	6966
45	19366	14540


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-10-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90  
LENS:30R  
NOT DRIVER:700mA  
30minutes warm-up

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:3.2896V I:0.7000A P:2.3027W PF:1.0000 Freq:49.99Hz Lamp Flux:203.982x1 lm		
NAME: 2468.106	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2410171257
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

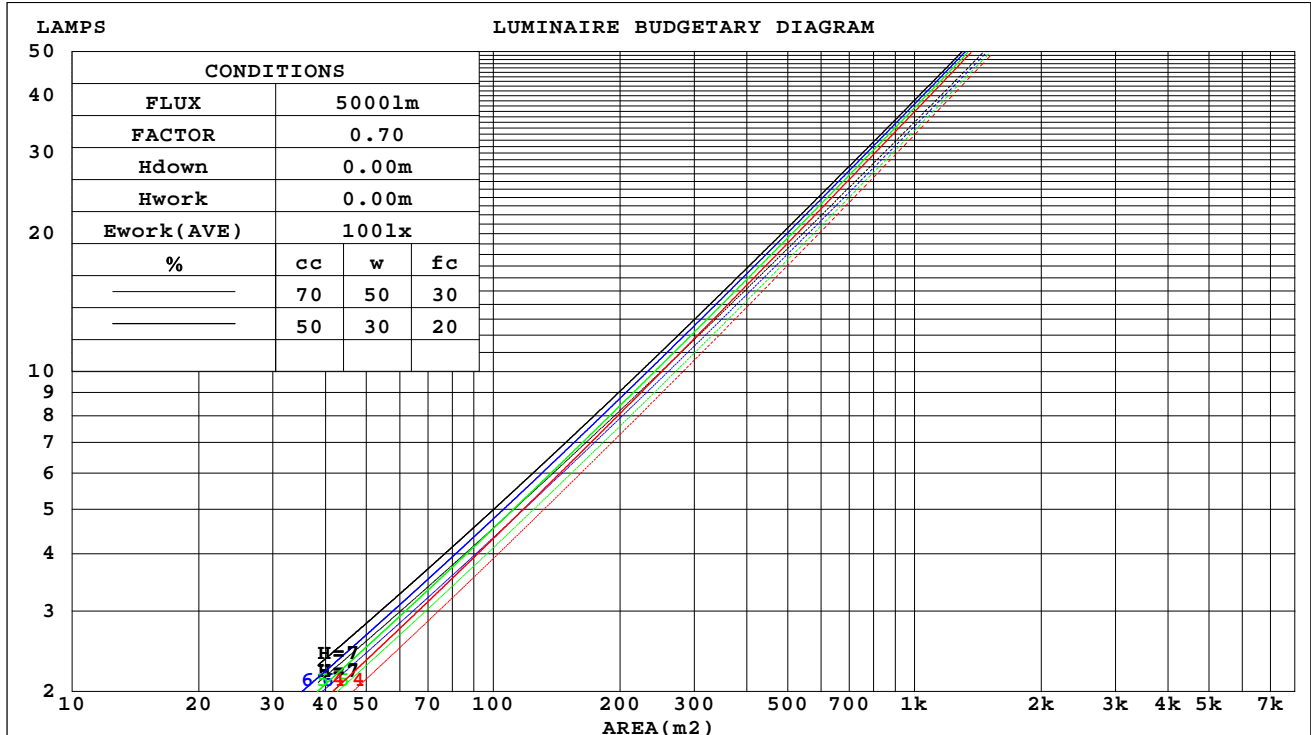

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-10-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90  
LENS:30R  
NOT DRIVER:700mA  
30minutes warm-up

### WEC AND CCEC

Test:U:3.2896V I:0.7000A P:2.3027W PF:1.0000 Freq:49.99Hz Lamp Flux:203.982x1 lm		
NAME: 2468.106	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2410171257
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0			
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0			
fc	20%			20%			20%			20%			20%			0			
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)												
0.0																			
1.0	.116	.066	.021	.111	.063	.020	.101	.058	.019	.093	.054	.017	.085	.049	.016				
2.0	.109	.060	.018	.105	.058	.018	.097	.054	.017	.090	.050	.016	.083	.047	.015				
3.0	.103	.055	.016	.099	.053	.016	.093	.050	.015	.087	.048	.015	.081	.045	.014				
4.0	.097	.051	.015	.094	.049	.015	.089	.047	.014	.084	.045	.014	.079	.043	.013				
5.0	.092	.047	.014	.090	.046	.013	.085	.044	.013	.080	.042	.013	.076	.041	.012				
6.0	.088	.044	.013	.086	.043	.012	.082	.042	.012	.078	.040	.012	.074	.039	.012				
7.0	.084	.041	.012	.082	.041	.012	.078	.040	.011	.075	.038	.011	.072	.037	.011				
8.0	.080	.039	.011	.079	.039	.011	.075	.038	.011	.072	.037	.011	.069	.036	.010				
9.0	.077	.037	.010	.075	.037	.010	.072	.036	.010	.070	.035	.010	.067	.034	.010				
10.0	.074	.035	.010	.072	.035	.010	.070	.034	.010	.067	.033	.010	.065	.033	.009				

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.144	.144	.144	.123	.123	.123	.084	.084	.084	.048	.048	.048	.015	.015	.015	
1.0	.128	.119	.111	.110	.102	.096	.075	.070	.066	.043	.041	.038	.014	.013	.012	
2.0	.115	.100	.088	.099	.086	.076	.068	.060	.053	.039	.035	.031	.013	.011	.010	
3.0	.105	.086	.071	.090	.074	.061	.062	.051	.043	.036	.030	.025	.011	.010	.008	
4.0	.096	.074	.058	.083	.064	.050	.057	.045	.035	.033	.026	.021	.011	.009	.007	
5.0	.089	.065	.048	.076	.056	.042	.053	.039	.029	.030	.023	.017	.010	.008	.006	
6.0	.083	.058	.040	.071	.050	.035	.049	.035	.025	.028	.021	.015	.009	.007	.005	
7.0	.077	.052	.034	.067	.045	.030	.046	.032	.021	.027	.019	.013	.009	.006	.004	
8.0	.073	.047	.029	.063	.041	.026	.043	.029	.018	.025	.017	.011	.008	.006	.004	
9.0	.069	.043	.026	.059	.037	.022	.041	.026	.016	.024	.015	.009	.008	.005	.003	
10.0	.065	.039	.022	.056	.034	.020	.039	.024	.014	.023	.014	.008	.007	.005	.003	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-10-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90  
LENS:30R  
NOT DRIVER:700mA  
30minutes warm-up

## UGR(Unified Glare Rating) Table

Test:U:3.2896V I:0.7000A P:2.3027W PF:1.0000 Freq:49.99Hz Lamp Flux:203.982x1 lm										
NAME: 2468.106					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2410171257		
MFR.: RISE					SUR.: 0.000346185m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.7	22.4	21.9	22.6	22.7	20.1	20.9	20.3	21.0	21.2
3H	21.5	22.2	21.7	22.4	22.6	20.0	20.7	20.2	20.9	21.0
4H	21.4	22.1	21.7	22.3	22.5	19.9	20.5	20.1	20.8	21.0
6H	21.3	22.0	21.6	22.2	22.4	19.8	20.4	20.1	20.7	20.9
8H	21.3	21.9	21.6	22.2	22.4	19.7	20.4	20.0	20.6	20.9
12H	21.2	21.8	21.6	22.1	22.4	19.7	20.3	20.0	20.5	20.8
4H 2H	21.4	22.1	21.7	22.3	22.5	19.9	20.6	20.1	20.8	21.0
3H	21.3	21.9	21.6	22.1	22.4	19.7	20.3	20.0	20.6	20.8
4H	21.2	21.7	21.5	22.0	22.3	19.6	20.2	20.0	20.5	20.8
6H	21.1	21.5	21.4	21.9	22.2	19.5	20.0	19.9	20.3	20.7
8H	21.0	21.5	21.4	21.8	22.2	19.5	19.9	19.9	20.3	20.6
12H	21.0	21.4	21.4	21.7	22.1	19.4	19.8	19.8	20.2	20.6
8H 4H	21.0	21.5	21.4	21.8	22.2	19.5	19.9	19.9	20.3	20.6
6H	20.9	21.3	21.3	21.7	22.1	19.4	19.7	19.8	20.1	20.5
8H	20.8	21.2	21.3	21.6	22.0	19.3	19.6	19.8	20.1	20.5
12H	20.8	21.1	21.3	21.5	22.0	19.3	19.5	19.7	20.0	20.4
12H 4H	21.0	21.4	21.4	21.7	22.1	19.4	19.8	19.8	20.2	20.6
6H	20.8	21.2	21.3	21.6	22.0	19.3	19.6	19.8	20.1	20.5
8H	20.8	21.1	21.3	21.5	22.0	19.3	19.5	19.7	20.0	20.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.9 / -11.0					+ 3.0 / - 9.3				
1.5H	+ 6.1 / - 9.1					+ 5.1 / - 7.5				
2.0H	+ 6.7 / - 7.5					+ 5.5 / - 6.4				

CIE Pub.117, 204.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -5.5)  
Area: 0.000346185 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-10-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90  
LENS:30R  
NOT DRIVER:700mA  
30minutes warm-up



### UTILIZATION FACTORS TABLE

Test:U:3.2896V I:0.7000A P:2.3027W PF:1.0000 Freq:49.99Hz Lamp Flux:203.982x1 lm		
NAME: 2468.106	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2410171257
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	63	61	67	63	61	67	63	60	58
0.80	73	69	67	73	69	66	72	68	66	64
1.00	76	72	70	76	72	70	75	72	69	66
1.25	79	75	73	78	75	73	77	74	72	69
1.50	81	78	75	80	77	75	78	76	74	71
2.00	83	80	78	82	79	77	80	78	76	72
2.50	84	81	79	83	80	78	80	79	77	73
3.00	85	83	81	84	82	80	81	80	78	73
4.00	86	85	83	85	83	82	82	81	80	75
5.00	87	86	85	86	84	83	83	82	81	75
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-10-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90  
LENS:30R  
NOT DRIVER:700mA  
30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:3.2896V I:0.7000A P:2.3027W PF:1.0000 Freq:49.99Hz Lamp Flux:203.982x1 lm		
NAME: 2468.106	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2410171257
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

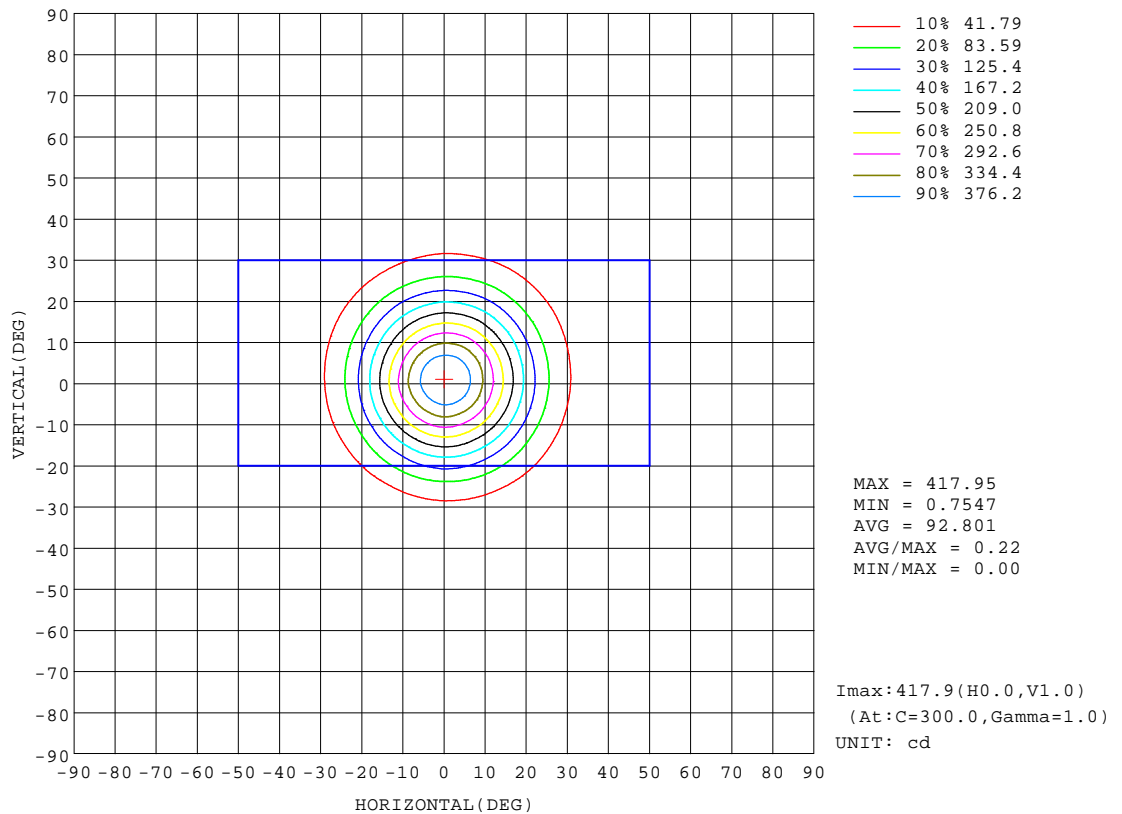


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-10-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90  
LENS:30R  
NOT DRIVER:700mA  
30minutes warm-up

## AAI Figure

Test:U:3.2896V I:0.7000A P:2.3027W PF:1.0000 Freq:49.99Hz Lamp Flux:203.982x1 lm		
NAME: 2468.106	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2410171257
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

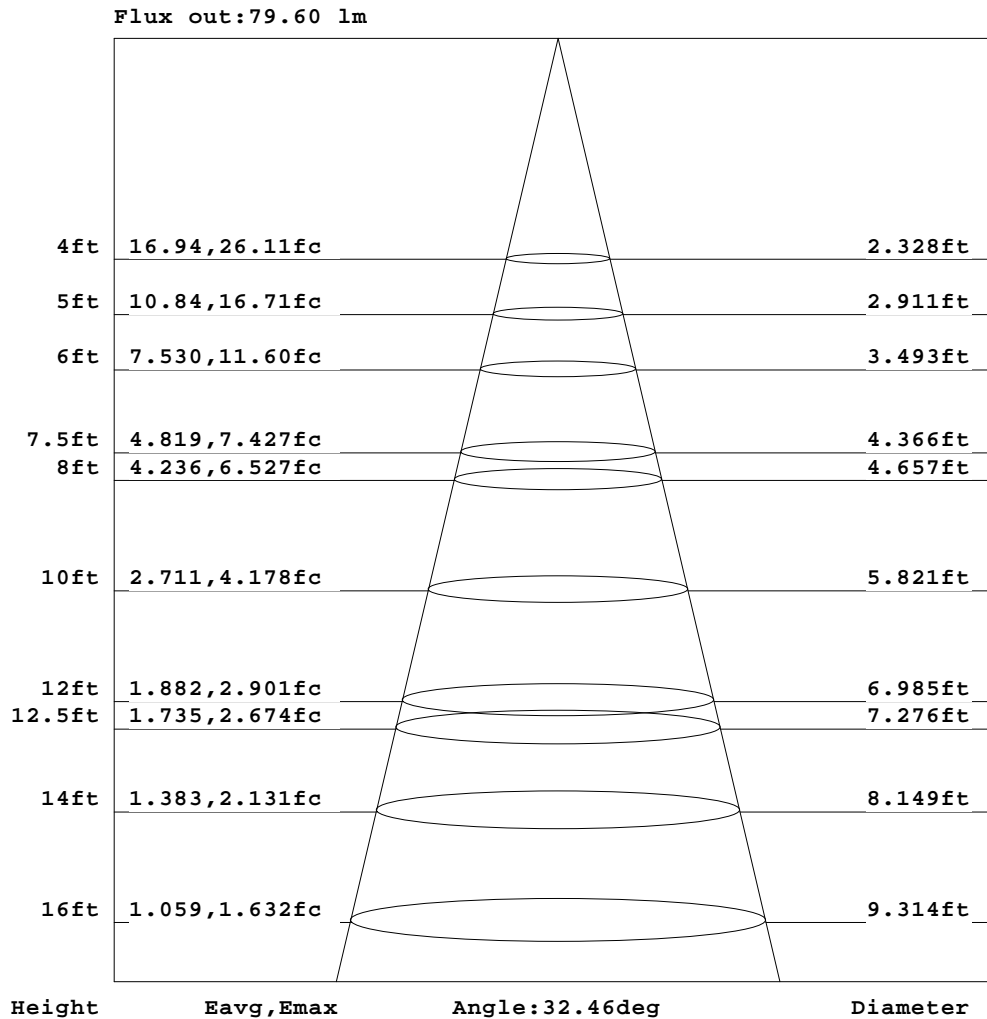


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2024-10-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXEX-30G-11H-3A-00-0-0 Ra: 90  
LENS: 30R  
NOT DRIVER: 700mA  
30minutes warm-up

## ISOLUX DIAGRAM

Test:U:3.2896V I:0.7000A P:2.3027W PF:1.0000 Freq:49.99Hz Lamp Flux:203.982x1 lm		
NAME: 2468.106	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2410171257
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

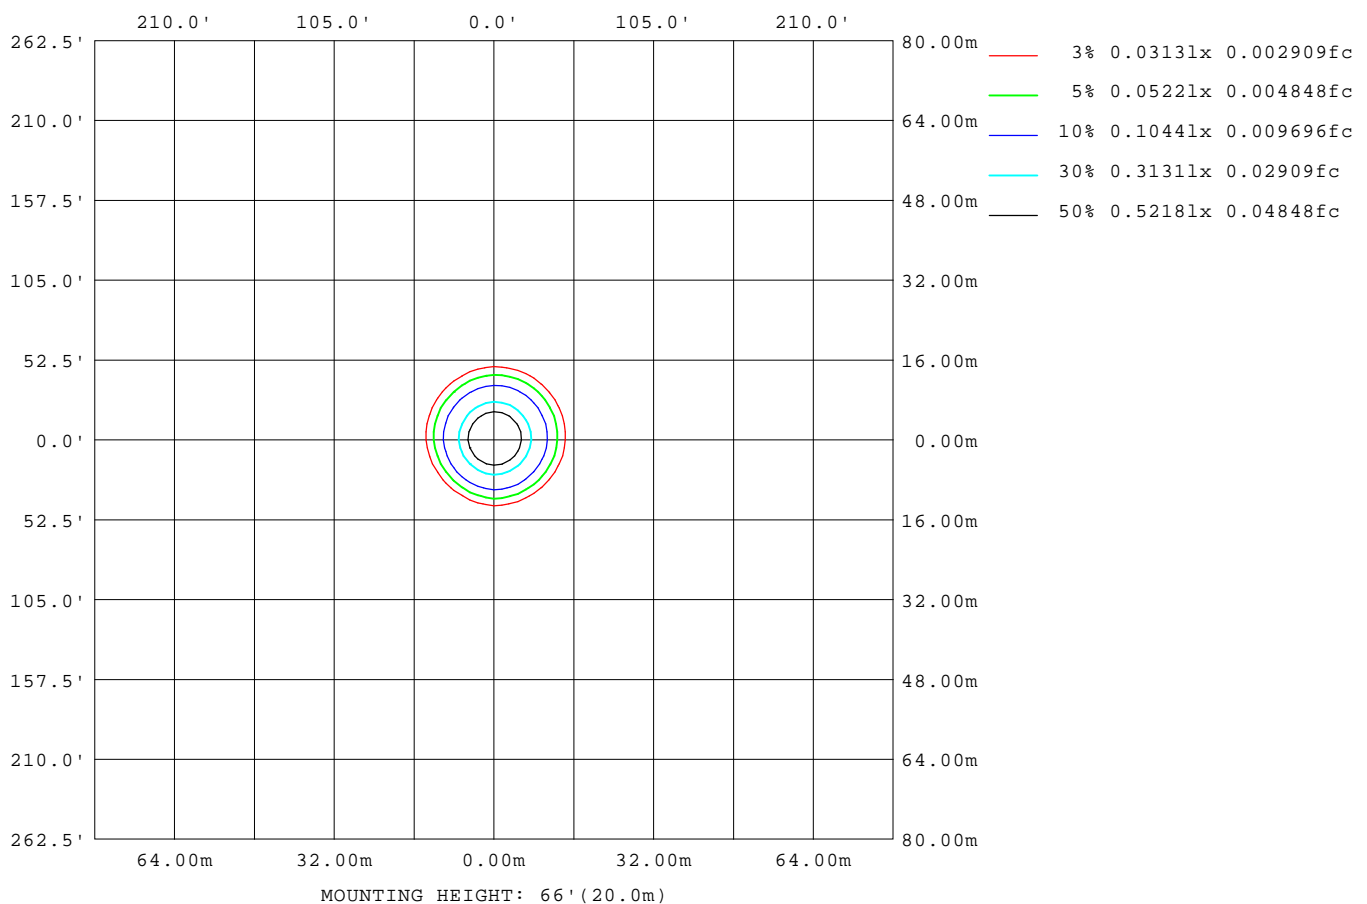

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-10-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90  
LENS:30R  
NOT DRIVER:700mA  
30minutes warm-up

## LED Avg.L Report

Test:U:3.2896V I:0.7000A P:2.3027W PF:1.0000 Freq:49.99Hz Lamp Flux:203.982x1 lm		
NAME: 2468.106	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2410171257
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1492
L_0~180(75)av	418
L_0~180(85)av	87
L_90~270(65)av	1484
L_90~270(75)av	376
L_90~270(85)av	123
L_45(65)av	1461
L_45(75)av	373
L_45(85)av	35

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-10-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90  
LENS:30R  
NOT DRIVER:700mA  
30minutes warm-up

## Planar Illuminance Curve

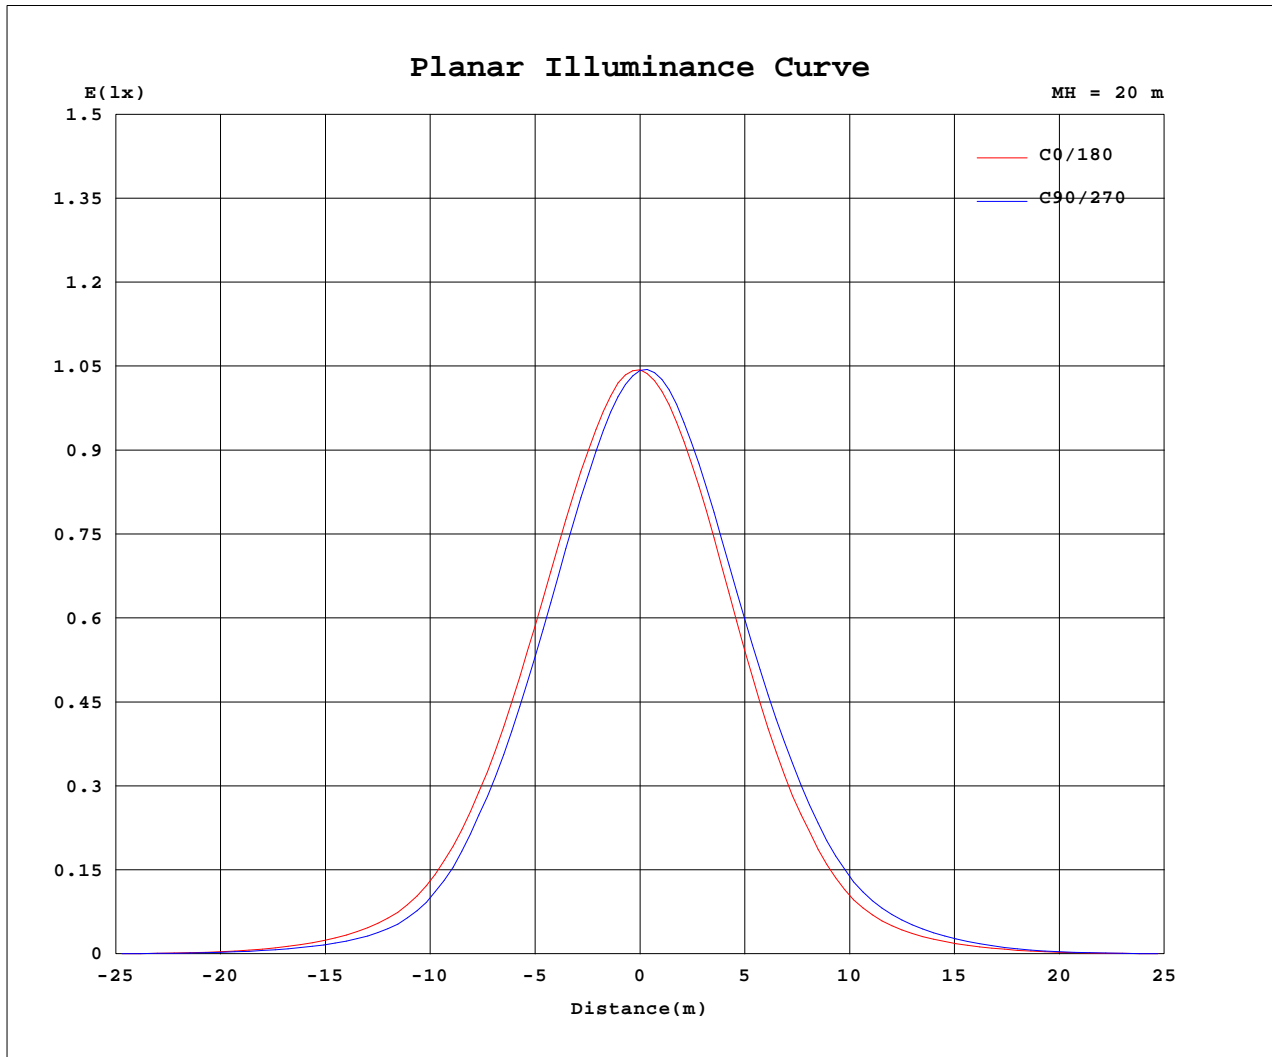

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators: zoe  
 Test Date: 2024-10-17

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: BXEX-30G-11H-3A-00-0-0 Ra: 90  
 LENS: 30R  
 NOT DRIVER: 700mA  
 30minutes warm-up



## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:3.2896V I:0.7000A P:2.3027W PF:1.0000 Freq:49.99Hz  
Lamp Flux:203.982x1 lm

NAME: 2468.106	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2410171257
MFR.: RISE	SUR.: 0.000346185m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	417	417	417	417	417	417	417	417	417	417	417	417						
5	392	387	381	378	377	379	384	389	394	397	400	397						
10	325	315	306	303	301	303	311	316	324	331	335	333						
15	240	228	218	216	212	213	220	225	236	245	250	247						
20	157	147	137	136	130	130	136	144	155	164	167	164						
25	89.8	79.8	74.6	70.9	66.4	66.9	73.1	79.3	88.0	94.1	97.3	94.1						
30	46.1	39.5	34.5	33.1	29.9	31.7	36.4	41.1	44.9	50.4	51.8	50.3						
35	24.9	20.4	17.6	16.9	15.2	16.0	19.5	21.9	24.5	27.6	28.3	27.1						
40	12.3	10.4	9.04	8.54	7.62	7.86	9.48	10.9	12.2	13.4	13.9	13.4						
45	4.74	4.30	3.76	3.56	3.31	3.32	3.74	4.09	4.44	4.72	4.88	4.94						
50	1.71	1.73	1.60	1.55	1.42	1.45	1.50	1.57	1.59	1.69	1.62	1.73						
55	0.86	0.84	0.82	0.84	0.81	0.80	0.84	0.82	0.85	0.86	0.85	0.85						
60	0.53	0.51	0.51	0.53	0.53	0.53	0.54	0.52	0.53	0.53	0.53	0.52						
65	0.20	0.21	0.21	0.23	0.23	0.24	0.24	0.23	0.21	0.20	0.19	0.19						
70	0.11	0.11	0.11	0.13	0.12	0.13	0.13	0.11	0.10	0.09	0.09	0.09						
75	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.03						
80	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01						
85	0.00	0.00	0.00	0.01	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-10-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXEX-30G-11H-3A-00-0-0 Ra:90  
LENS:30R  
NOT DRIVER:700mA  
30minutes warm-up