




TAURUS-S3W



## Product specification

## INTERIOR CABINET LIGHTS

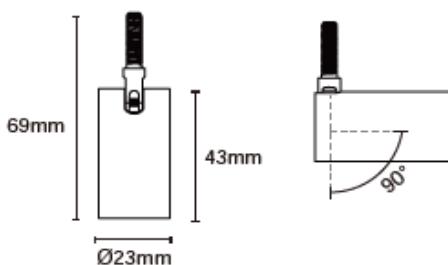

8

## Technical Specification

Article number 2468.106

LED Consumption 3W

Fixture Consumption -

Current / Voltage 700mA / --Vdc

CRI 90+

CCT 3000K

LED Lumen <sup>1</sup> 210lm

Delivered Lumen -

Beam Angle available 16°/25°/45°/60° (Lens)

## Driver Technical Specification (Remoted)

Driver Brand - Driver Model -

Input voltage / Frequency range - Output Current / Voltage -

Dimming / Flicker - Certification -

Power Factor - Warranty -

## Technical character

## Materials

Products Standard IEC 60598-1 Luminaire aluminum

IEC 62031 Optics PC Lens

Insulation CLASS III Fixture color available brass / black

Protection IP40

Tilt / Rotate 0~90° / -

Operating temperature 0~35°C

Average Failure Time

## Accessories

## Photometric


S-014  
Snoot

## Remarks

<sup>1</sup>. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.



## WIRING DIAGRAM

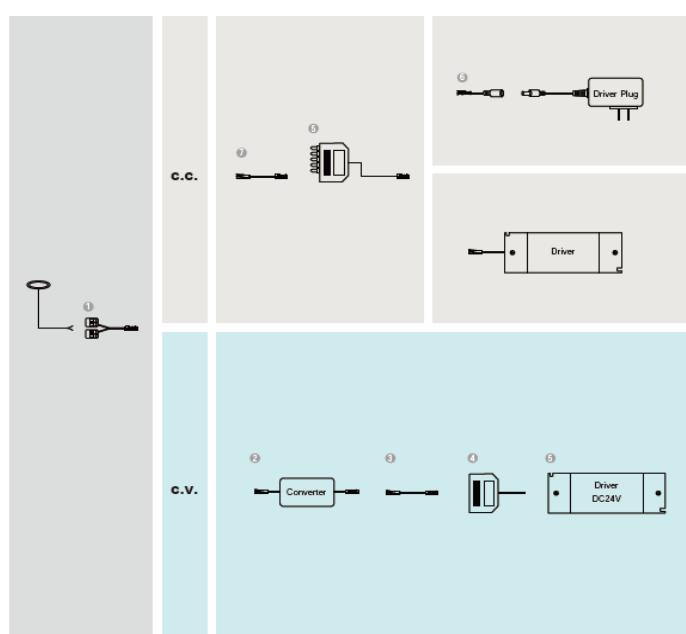

### Accessory



Quick connector cord  
Length : 2.37"(6cm)

### C.C Accessory (Constant Current)



3 way series connection cord  
Length : 6"(15.24cm)



Driver connection cord  
Length : 3.94"(10cm)



Connection cord  
Length : 36"(91.44cm)

### C.V Accessory (Constant Voltage)



I/P: 24V,  
O/P: 300mA/max.3.9V



3 way parallel connection cord  
Length : 6"(15.24cm)



I/P: 24V,  
O/P: 700mA/max.3.9V



I/P: 220-240V,  
O/P: 24VDC/max.15w  
CE/TUV/UKCA



Connection cord  
Length : 36"(91.44cm)



I/P: 120V,  
O/P: 24VDC/max.12w  
CE/CUL/FCC