




TAURUS-S3WF



Product specification

INTERIOR CABINET LIGHTS

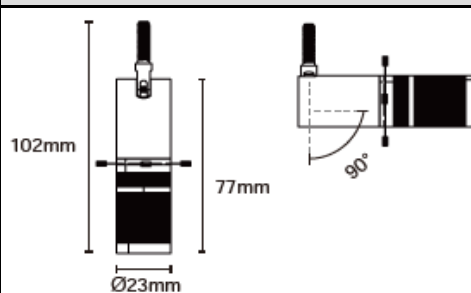

8

Technical Specification

Article number	2468.108F
LED Consumption	3W
Fixture Consumption	-
Current / Voltage	700mA / --Vdc
CRI	90+
CCT	3000K
LED Lumen *1	193lm
Delivered Lumen	-
Beam Angle available	18°~35° (Lens)

Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character

Products Standard	IEC 60598-1	Luminaire	aluminum
	IEC 62031	Optics	PC Lens
Insulation	CLASS III	Fixture color available	black
Protection			
Tilt / Rotate	0~90° / -		
Operating temperature	0~35°C		
Average Failure Time			

Materials

Accessories

CF-006-xxx
Color filterGOBO-004-xxx..
OEM GOBO,
please contact with our sales rep for more info


Photometric

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.

WIRING DIAGRAM

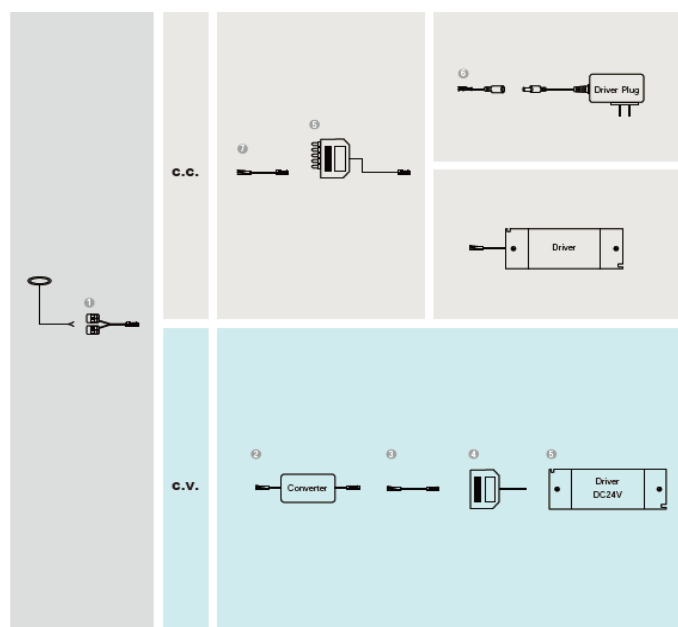

Accessory

	CS-TQ-37-600 Type: Connection	Quick connector cord Length : 2.37"(6cm)
--	---	---

C.C Accessory (Constant Current)

	CS-TOP3-37-150 Type: TOP junction box	3 way series connection cord Length : 6"(15.24cm)
--	---	--

	CS-TD-37-100 Type: Driver connection	Driver connection cord Length : 3.94"(10cm)
--	--	--

	CS-TT-37-910 Type: Connection	Connection cord Length : 36"(91.44cm)
--	---	--

C.V Accessory (Constant Voltage)

	EB-0088-300 Type: Converter	I/P: 24V, O/P: 300mA/max.3-9V
--	---------------------------------------	----------------------------------

	EB-0088-700 Type: Converter	I/P: 24V, O/P: 700mA/max.3-9V
--	---------------------------------------	----------------------------------

	CS-TT-38-910 Type: Connection	Connection cord Length : 36"(91.44cm)
--	---	--

	CS-TOP3-38-150 Type: TOP junction box	3 way parallel connection cord Length : 6"(15.24cm)
--	---	--

	AED15-24VLSTB-IP44 Type: Driver	I/P: 220-240V, O/P: 24VDC/max.15w CE/TUV/UKCA
--	---	---

	AED12-24VLSTB-UL Type: Driver	I/P: 120V, O/P: 24VDC/max.12w CE/CUL/FCC
--	---	--