

## Luminaire Photograph



Light Output Ratio:	80.8%	
Luminaire Power:	9.761 W	
SHR Nominal:	0.50	Calculated using the TM5
SHR Maximum:	0.55	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2026-3-26

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRH-30G0600-A-83 Ra:90  
LENS: PM-1117B 36R  
DRIVER: LD008D-CU02040 200mA  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

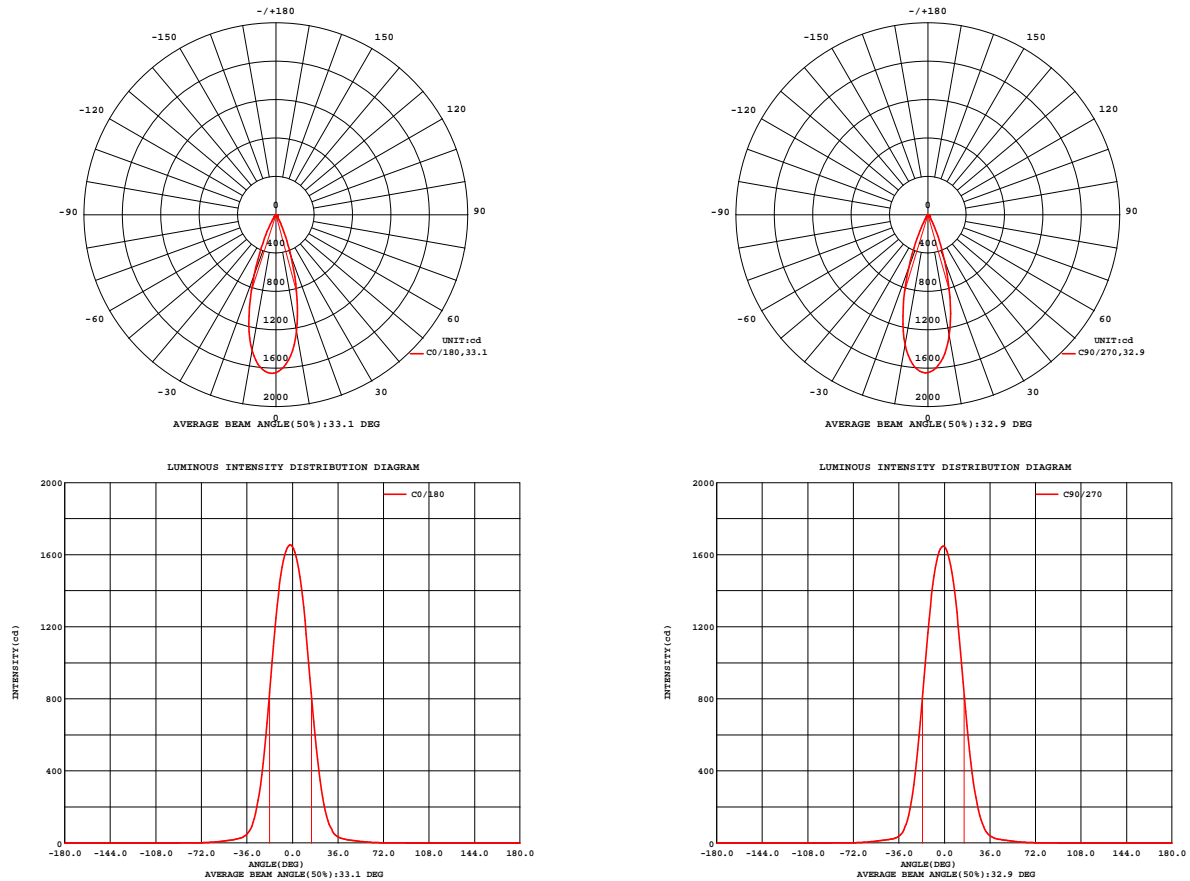


Fig. C0/C180

Fig. C90/C270

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2026-3-26

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRH-30G0600-A-83 Ra: 90  
LENS: PM-1117B 36R  
DRIVER: LD008D-CU02040 200mA  
30minutes warm-up


## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.16V I:0.0488A P:9.7605W PF:0.9039 Freq:49.99Hz  
Lamp Flux:725.92x1 lm


NAME: 2529.401	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2603260055
MFR.: RISE	SUR.: 0.00080384m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 60.07 lm/W			
MODEL	Bridgelux	Imax(cd)	1656	S/MH(C0/180)	0.57
NOMINAL POWER(W)	10	LOR(%)	80.8	S/MH(C90/270)	0.55
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	586.27	$\eta$ UP,DN(C0-180)	0.0,38.5
NOMINAL FLUX(lm)	725.92	CIE CLASS	DIRECT	$\eta$ UP,DN(C180-360)	0.0,42.3
LAMPS INSIDE	1	$\eta$ up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	$\eta$ down(%)	80.8	CIBSE SHR MAX	0.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

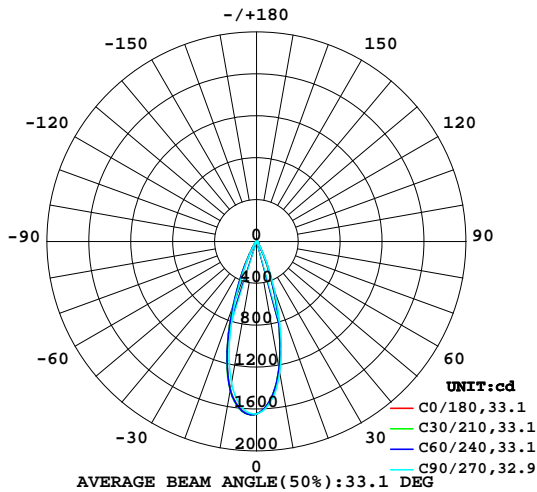

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

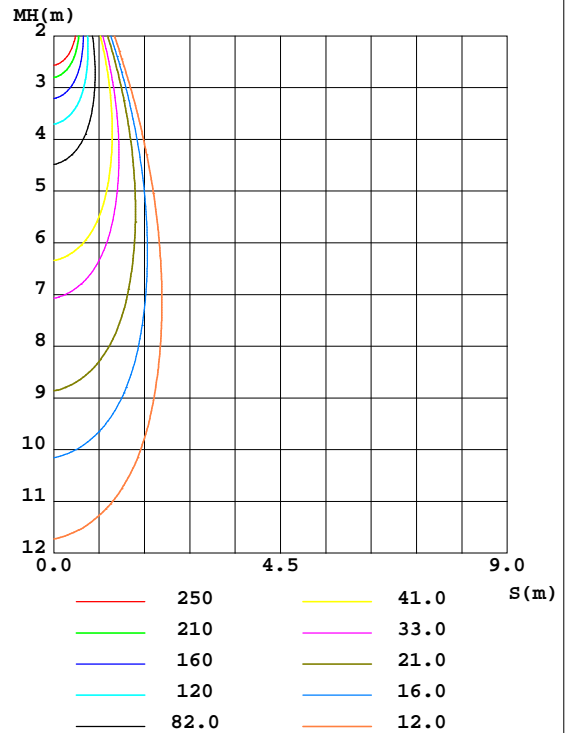

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2026-3-26

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
LENS:PM-1117B 36R  
DRIVER:LD008D-CU02040 200mA  
30minutes warm-up

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:


$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	1235	1234	1279	1350	1439	1445	1375	1288	0- 10	142.1	142.1	24.2,19.6
20	463.9	467.3	509.7	588.0	664.6	659.5	589.8	508.3	10- 20	257.1	399.2	68.1,55
30	90.40	95.06	108.6	125.2	134.8	125.0	104.4	92.57	20- 30	127.1	526.3	89.8,72.5
40	23.57	24.77	26.35	28.68	30.03	27.84	24.78	23.72	30- 40	33.03	559.4	95.4,77.1
50	11.79	12.33	13.43	13.61	14.43	14.38	13.79	12.29	40- 50	14.33	573.7	97.9,79
60	4.804	5.100	5.767	5.871	6.205	6.136	5.873	5.078	50- 60	8.142	581.8	99.2,80.1
70	1.395	1.519	1.791	1.817	1.936	1.847	1.728	1.495	60- 70	3.291	585.1	99.8,80.6
80	0.3439	0.3694	0.4578	0.4822	0.5057	0.4697	0.4197	0.3700	70- 80	0.9684	586.1	100,80.7
90	0	0	0	0	0	0	0	0	80- 90	0.1886	586.3	100,80.8
100	0	0	0	0	0	0	0	0	90-100	0	586.3	100,80.8
110	0	0	0	0	0	0	0	0	100-110	0	586.3	100,80.8
120	0	0	0	0	0	0	0	0	110-120	0	586.3	100,80.8
130	0	0	0	0	0	0	0	0	120-130	0	586.3	100,80.8
140	0	0	0	0	0	0	0	0	130-140	0	586.3	100,80.8
150	0	0	0	0	0	0	0	0	140-150	0	586.3	100,80.8
160	0	0	0	0	0	0	0	0	150-160	0	586.3	100,80.8
170	0	0	0	0	0	0	0	0	160-170	0	586.3	100,80.8
180	0	0	0	0	0	0	0	0	170-180	0	586.3	100,80.8
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:zoe  
 Test Date:2026-3-26

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:3.160m [K=1.0000]  
 Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
 LENS:PM-1117B 36R  
 DRIVER:LD008D-CU02040 200mA  
 30minutes warm-up

## LUMINANCE LIMITATION CURVES

Test:U:220.16V I:0.0488A P:9.7605W PF:0.9039 Freq:49.99Hz Lamp Flux:725.92x1 lm		
NAME: 2529.401	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2603260055
MFR.: RISE	SUR.: 0.00080384m2	Shielding Angle:

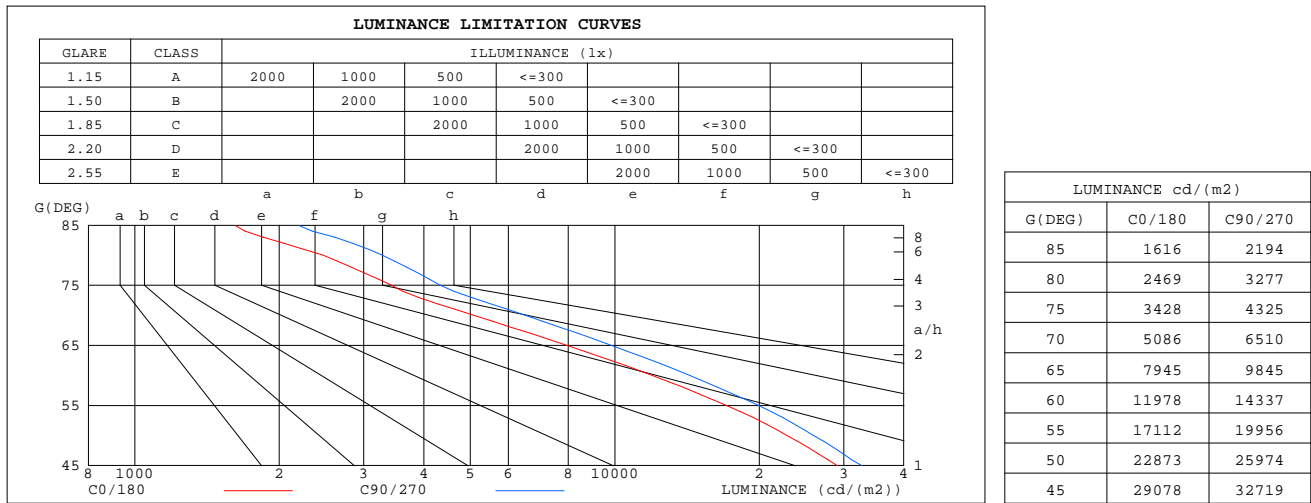

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2026-3-26

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
LENS:PM-1117B 36R  
DRIVER:LD008D-CU02040 200mA  
30minutes warm-up

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.16V I:0.0488A P:9.7605W PF:0.9039 Freq:49.99Hz  
Lamp Flux:725.92x1 lm

NAME: 2529.401

TYPE:

WEIGHT:

SPEC.: 3000K

DIM.:


SERIAL No.: 2603260055

MFR.: RISE

SUR.: 0.00080384m2

Shielding Angle:

$\rho_{cc}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

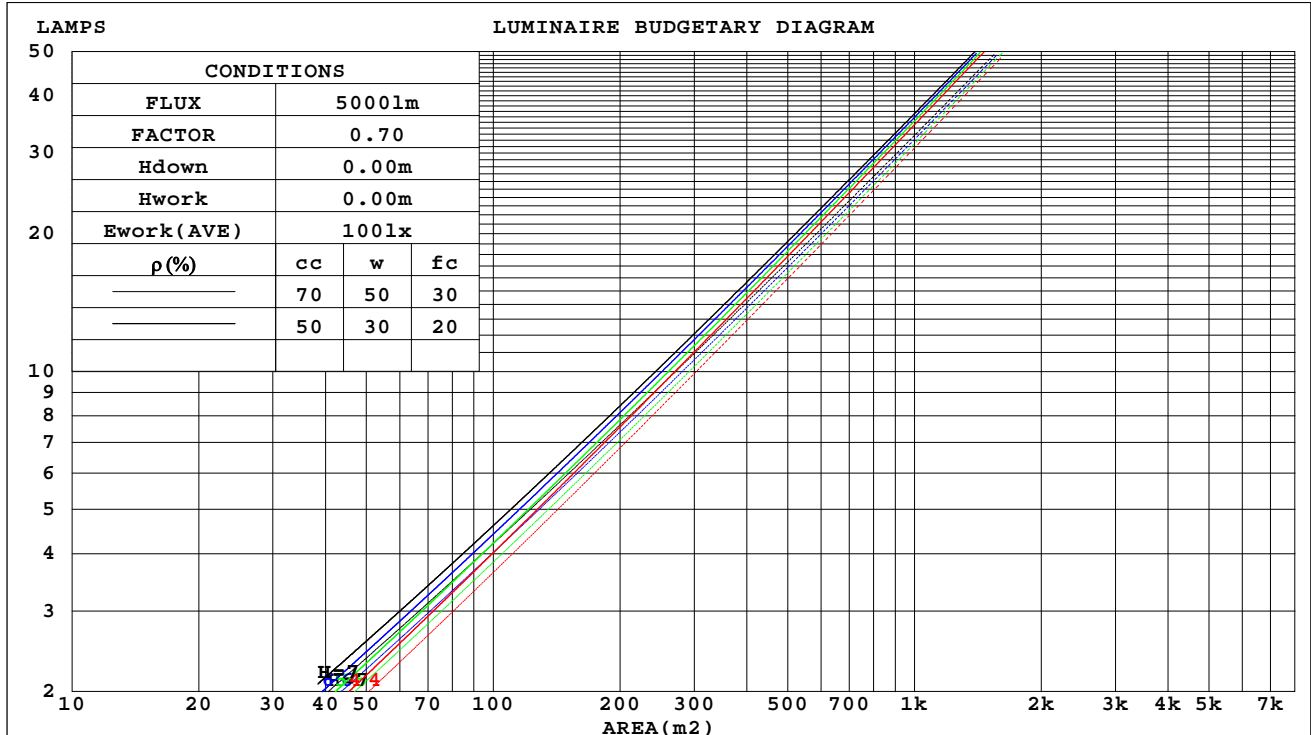

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2026-3-26

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
LENS:PM-1117B 36R  
DRIVER:LD008D-CU02040 200mA  
30minutes warm-up



## WEC AND CCEC

Test:U:220.16V I:0.0488A P:9.7605W PF:0.9039 Freq:49.99Hz Lamp Flux:725.92x1 lm		
NAME: 2529.401	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2603260055
MFR.: RISE	SUR.: 0.00080384m2	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pf <sub>c</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.123	.070	.022	.118	.067	.021	.108	.062	.020	.098	.057	.018	.090	.052	.017	
2.0	.116	.063	.019	.111	.061	.019	.103	.057	.018	.095	.053	.017	.088	.050	.016	
3.0	.109	.058	.017	.105	.056	.017	.098	.053	.016	.091	.050	.015	.085	.047	.015	
4.0	.102	.053	.016	.099	.052	.015	.093	.049	.015	.088	.047	.014	.083	.045	.014	
5.0	.097	.049	.014	.094	.048	.014	.089	.046	.014	.084	.044	.013	.080	.043	.013	
6.0	.092	.046	.013	.090	.045	.013	.085	.044	.013	.081	.042	.012	.077	.041	.012	
7.0	.087	.043	.012	.085	.043	.012	.081	.041	.012	.078	.040	.012	.074	.039	.011	
8.0	.083	.041	.011	.082	.040	.011	.078	.039	.011	.075	.038	.011	.072	.037	.011	
9.0	.080	.039	.011	.078	.038	.011	.075	.037	.011	.072	.036	.010	.070	.035	.010	
10.0	.077	.037	.010	.075	.036	.010	.072	.035	.010	.070	.035	.010	.067	.034	.010	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pf <sub>c</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.154	.154	.154	.131	.131	.131	.090	.090	.090	.052	.052	.052	.016	.016	.016	
1.0	.137	.127	.119	.117	.109	.102	.080	.075	.071	.046	.043	.041	.015	.014	.013	
2.0	.123	.107	.094	.105	.092	.081	.072	.064	.056	.042	.037	.033	.013	.012	.011	
3.0	.112	.092	.075	.096	.079	.065	.066	.055	.046	.038	.032	.027	.012	.010	.009	
4.0	.102	.079	.062	.088	.069	.054	.060	.048	.038	.035	.028	.022	.011	.009	.007	
5.0	.094	.070	.051	.081	.060	.045	.056	.042	.032	.032	.025	.019	.010	.008	.006	
6.0	.088	.062	.043	.075	.053	.038	.052	.037	.027	.030	.022	.016	.010	.007	.005	
7.0	.082	.055	.037	.070	.048	.032	.049	.034	.023	.028	.020	.014	.009	.006	.004	
8.0	.077	.050	.032	.066	.043	.028	.046	.030	.020	.027	.018	.012	.009	.006	.004	
9.0	.072	.046	.028	.062	.040	.024	.043	.028	.017	.025	.016	.010	.008	.005	.003	
10.0	.068	.042	.024	.059	.036	.021	.041	.026	.015	.024	.015	.009	.008	.005	.003	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2026-3-26

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
LENS:PM-1117B 36R  
DRIVER:LD008D-CU02040 200mA  
30minutes warm-up

## UGR(Unified Glare Rating) Table

Test:U:220.16V I:0.0488A P:9.7605W PF:0.9039 Freq:49.99Hz Lamp Flux:725.92x1 lm										
NAME: 2529.401			TYPE:			WEIGHT:				
SPEC.: 3000K			DIM.:			SERIAL No.: 2603260055				
MFR.: RISE			SUR.: 0.00080384m2			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.8	17.6	17.0	17.7	17.9	17.4	18.2	17.6	18.3	18.5
3H	16.9	17.6	17.1	17.8	18.0	17.5	18.2	17.8	18.4	18.6
4H	16.9	17.5	17.1	17.7	17.9	17.5	18.2	17.8	18.4	18.6
6H	16.8	17.4	17.1	17.7	17.9	17.4	18.1	17.7	18.3	18.5
8H	16.8	17.4	17.1	17.6	17.9	17.4	18.0	17.7	18.3	18.5
12H	16.7	17.3	17.0	17.6	17.8	17.4	17.9	17.7	18.2	18.5
4H 2H	16.9	17.5	17.1	17.7	18.0	17.4	18.1	17.7	18.3	18.5
3H	16.9	17.5	17.3	17.8	18.1	17.5	18.1	17.8	18.4	18.6
4H	16.9	17.4	17.3	17.7	18.0	17.5	18.0	17.8	18.3	18.6
6H	16.9	17.3	17.2	17.7	18.0	17.5	17.9	17.8	18.3	18.6
8H	16.8	17.3	17.2	17.6	18.0	17.4	17.9	17.8	18.2	18.6
12H	16.8	17.2	17.2	17.5	17.9	17.4	17.8	17.8	18.2	18.5
8H 4H	16.8	17.2	17.2	17.6	18.0	17.4	17.8	17.8	18.2	18.5
6H	16.8	17.1	17.2	17.5	17.9	17.4	17.7	17.8	18.1	18.5
8H	16.7	17.0	17.2	17.5	17.9	17.3	17.6	17.8	18.1	18.5
12H	16.7	16.9	17.1	17.4	17.9	17.3	17.6	17.7	18.0	18.5
12H 4H	16.8	17.2	17.2	17.5	17.9	17.3	17.7	17.7	18.1	18.5
6H	16.7	17.0	17.2	17.4	17.9	17.3	17.6	17.7	18.0	18.5
8H	16.7	16.9	17.1	17.4	17.9	17.3	17.5	17.7	18.0	18.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.3 / - 2.2					+ 1.6 / - 1.9				
1.5H	+ 1.7 / - 1.2					+ 2.2 / - 1.3				
2.0H	+ 2.4 / - 2.9					+ 2.5 / - 2.9				

CIE Pub.117, 725.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.1)  
Area: 0.00080384 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2026-3-26

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
LENS:PM-1117B 36R  
DRIVER:LD008D-CU02040 200mA  
30minutes warm-up



### UTILIZATION FACTORS TABLE

Test:U:220.16V I:0.0488A P:9.7605W PF:0.9039 Freq:49.99Hz Lamp Flux:725.92x1 lm		
NAME: 2529.401	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2603260055
MFR.: RISE	SUR.: 0.00080384m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	72	67	64	71	67	64	71	66	64	61
0.80	77	73	70	77	73	70	76	72	70	67
1.00	81	77	74	80	76	73	79	76	73	70
1.25	84	80	77	83	79	77	82	79	76	73
1.50	86	82	80	85	82	79	83	81	78	75
2.00	88	85	82	87	84	82	85	82	80	76
2.50	89	86	84	88	85	83	86	83	82	77
3.00	91	88	86	89	87	85	86	85	83	78
4.00	92	90	88	90	89	87	88	86	85	79
5.00	93	91	90	91	90	89	88	87	86	80
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2026-3-26

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
LENS:PM-1117B 36R  
DRIVER:LD008D-CU02040 200mA  
30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:220.16V I:0.0488A P:9.7605W PF:0.9039 Freq:49.99Hz Lamp Flux:725.92x1 lm		
NAME: 2529.401	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2603260055
MFR.: RISE	SUR.: 0.00080384m2	Shielding Angle:

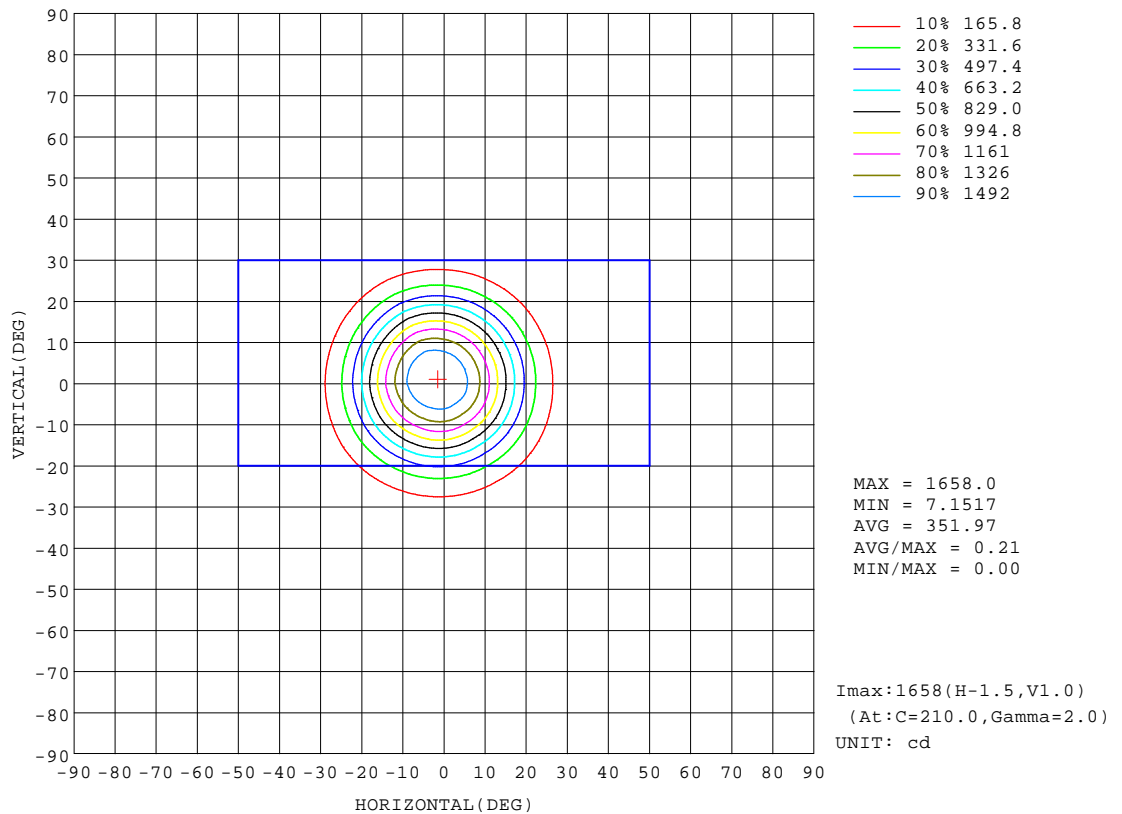


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2026-3-26

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
LENS:PM-1117B 36R  
DRIVER:LD008D-CU02040 200mA  
30minutes warm-up

## AAI Figure

Test:U:220.16V I:0.0488A P:9.7605W PF:0.9039 Freq:49.99Hz Lamp Flux:725.92x1 lm		
NAME: 2529.401	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2603260055
MFR.: RISE	SUR.: 0.00080384m2	Shielding Angle:

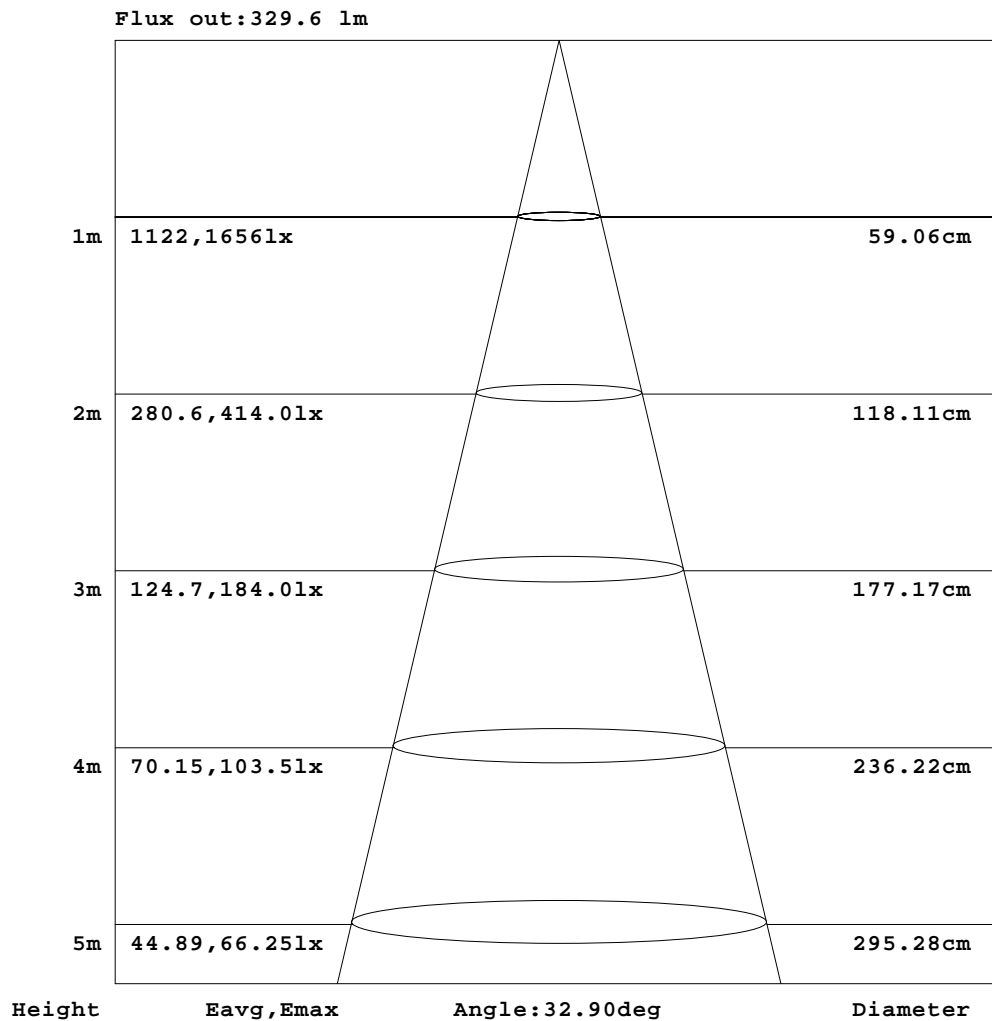


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2026-3-26

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
LENS:PM-1117B 36R  
DRIVER:LD008D-CU02040 200mA  
30minutes warm-up

## ISOLUX DIAGRAM

Test:U:220.16V I:0.0488A P:9.7605W PF:0.9039 Freq:49.99Hz Lamp Flux:725.92x1 lm		
NAME: 2529.401	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2603260055
MFR.: RISE	SUR.: 0.00080384m2	Shielding Angle:

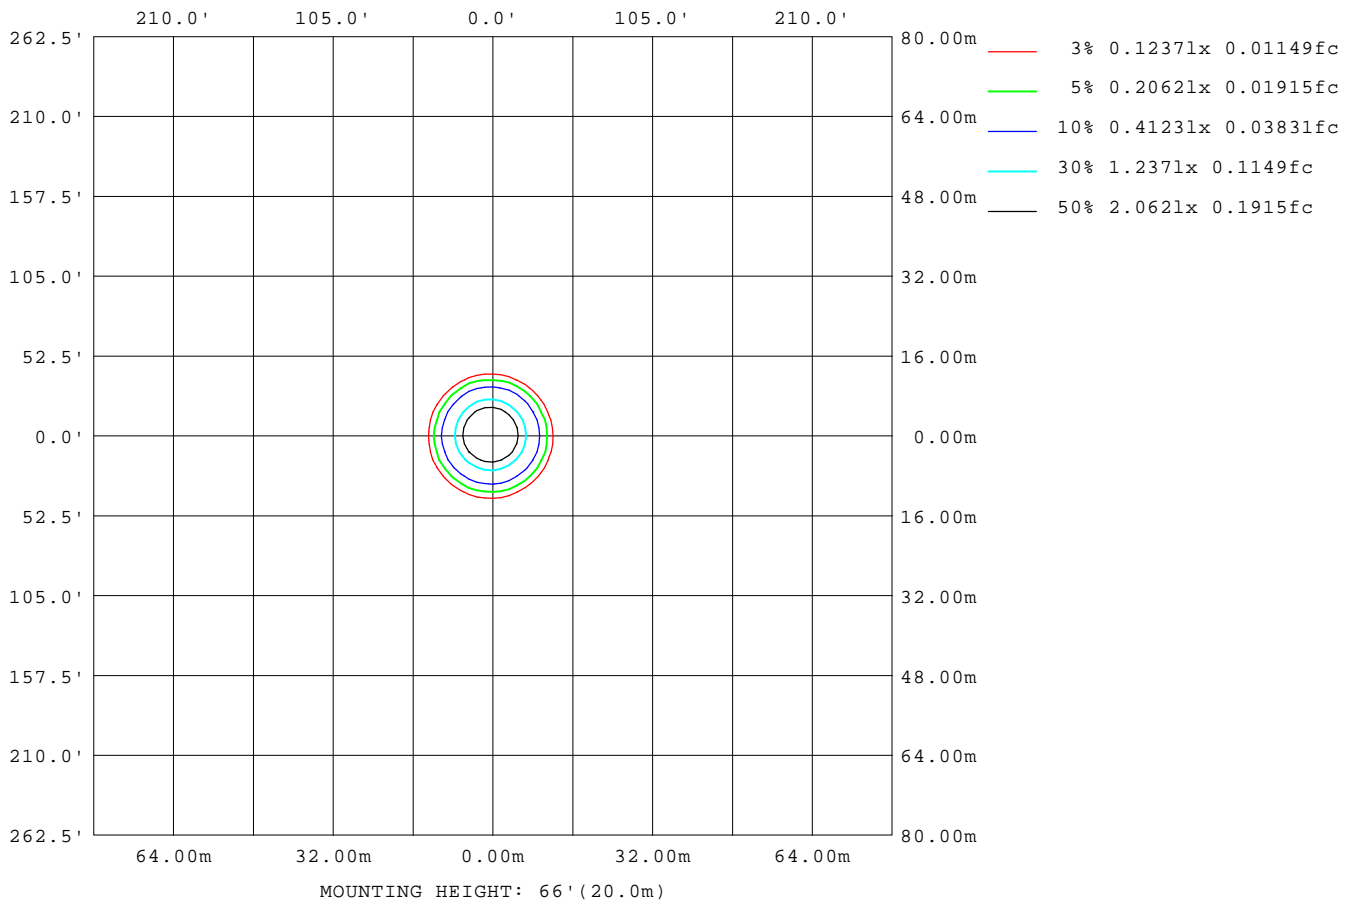

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3 °C  
Operators:zoe  
Test Date:2026-3-26

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
LENS:PM-1117B 36R  
DRIVER:LD008D-CU02040 200mA  
30minutes warm-up

## LED Avg.L Report

Test:U:220.16V I:0.0488A P:9.7605W PF:0.9039 Freq:49.99Hz Lamp Flux:725.92x1 lm		
NAME: 2529.401	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2603260055
MFR.: RISE	SUR.: 0.00080384m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	9247
L_0~180(75)av	4050
L_0~180(85)av	2139
L_90~270(65)av	9870
L_90~270(75)av	4155
L_90~270(85)av	2109
L_45(65)av	9267
L_45(75)av	4049
L_45(85)av	2018

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2026-3-26

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
LENS:PM-1117B 36R  
DRIVER:LD008D-CU02040 200mA  
30minutes warm-up

## Planar Illuminance Curve

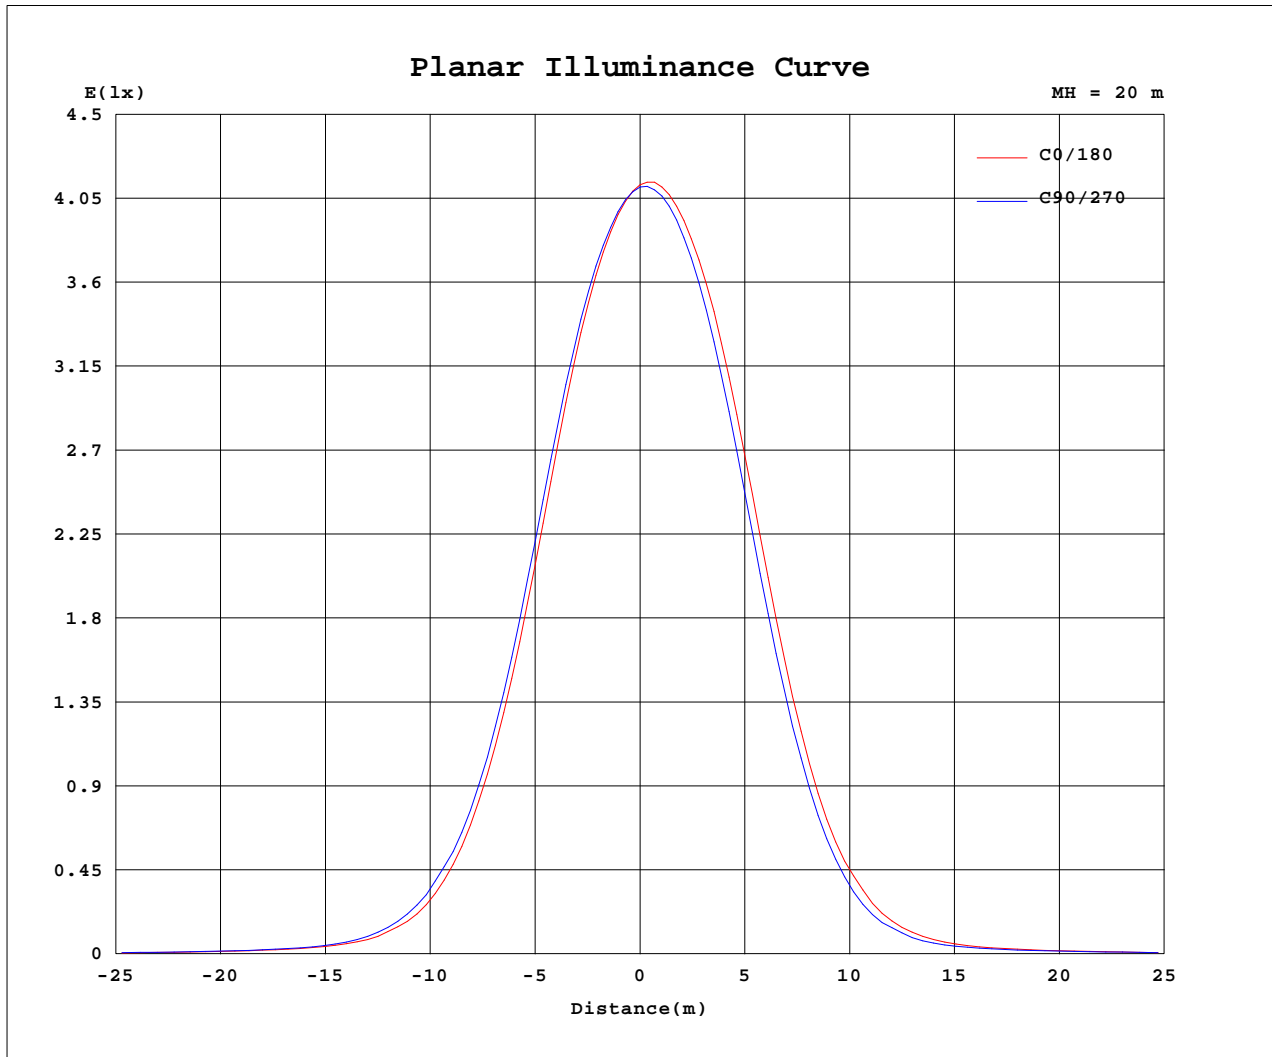

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators: zoe  
 Test Date: 2026-3-26

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: BXRH-30G0600-A-83 Ra: 90  
 LENS: PM-1117B 36R  
 DRIVER: LD008D-CU02040 200mA  
 30minutes warm-up



## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.16V I:0.0488A P:9.7605W PF:0.9039 Freq:49.99Hz Lamp Flux:725.92x1 lm		
NAME: 2529.401	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2603260055
MFR.: RISE	SUR.: 0.00080384m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1646	1646	1646	1646	1646	1646	1646	1646	1646	1646	1646	1646						
5	1520	1518	1518	1538	1561	1591	1618	1625	1623	1593	1564	1534						
10	1235	1232	1237	1279	1318	1383	1439	1447	1443	1375	1315	1261						
15	833	831	839	891	944	1030	1091	1090	1088	1003	927	863						
20	464	464	471	510	555	621	665	663	657	590	530	486						
25	213	224	225	253	270	305	323	319	311	273	246	221						
30	90.4	93.2	97.0	109	119	132	135	128	121	104	94.9	90.2						
35	40.0	42.5	43.6	47.4	51.8	56.5	56.9	53.3	49.2	43.1	41.9	39.1						
40	23.6	24.6	24.9	26.4	27.7	29.7	30.0	28.8	26.9	24.8	24.2	23.2						
45	16.5	17.0	17.4	18.6	18.4	19.5	20.2	19.7	19.3	18.3	17.1	16.5						
50	11.8	12.1	12.5	13.4	13.3	13.9	14.4	14.4	14.4	13.8	12.6	12.0						
55	7.87	8.10	8.49	9.21	9.23	9.65	9.93	9.89	9.97	9.49	8.60	8.05						
60	4.80	4.94	5.26	5.77	5.77	5.97	6.20	6.10	6.17	5.87	5.28	4.87						
65	2.69	2.80	2.99	3.35	3.31	3.45	3.59	3.49	3.51	3.36	2.99	2.73						
70	1.40	1.46	1.57	1.79	1.78	1.86	1.94	1.86	1.83	1.73	1.56	1.43						
75	0.71	0.74	0.79	0.90	0.90	0.95	0.97	0.95	0.90	0.83	0.79	0.72						
80	0.34	0.35	0.39	0.46	0.47	0.49	0.51	0.48	0.46	0.42	0.39	0.35						
85	0.11	0.11	0.12	0.15	0.16	0.18	0.19	0.17	0.16	0.14	0.12	0.11						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2026-3-26

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
LENS:PM-1117B 36R  
DRIVER:LD008D-CU02040 200mA  
30minutes warm-up