

### Luminaire Photograph



Light Output Ratio:	76.8%	
Luminaire Power:	9.715 W	
SHR Nominal:	0.75	Calculated using the TM5
SHR Maximum:	0.85	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2026-3-26

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRH-30G0600-A-83 Ra: 90  
LENS: PM-1117C 50R  
DRIVER: LD008D-CU02040 200mA  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

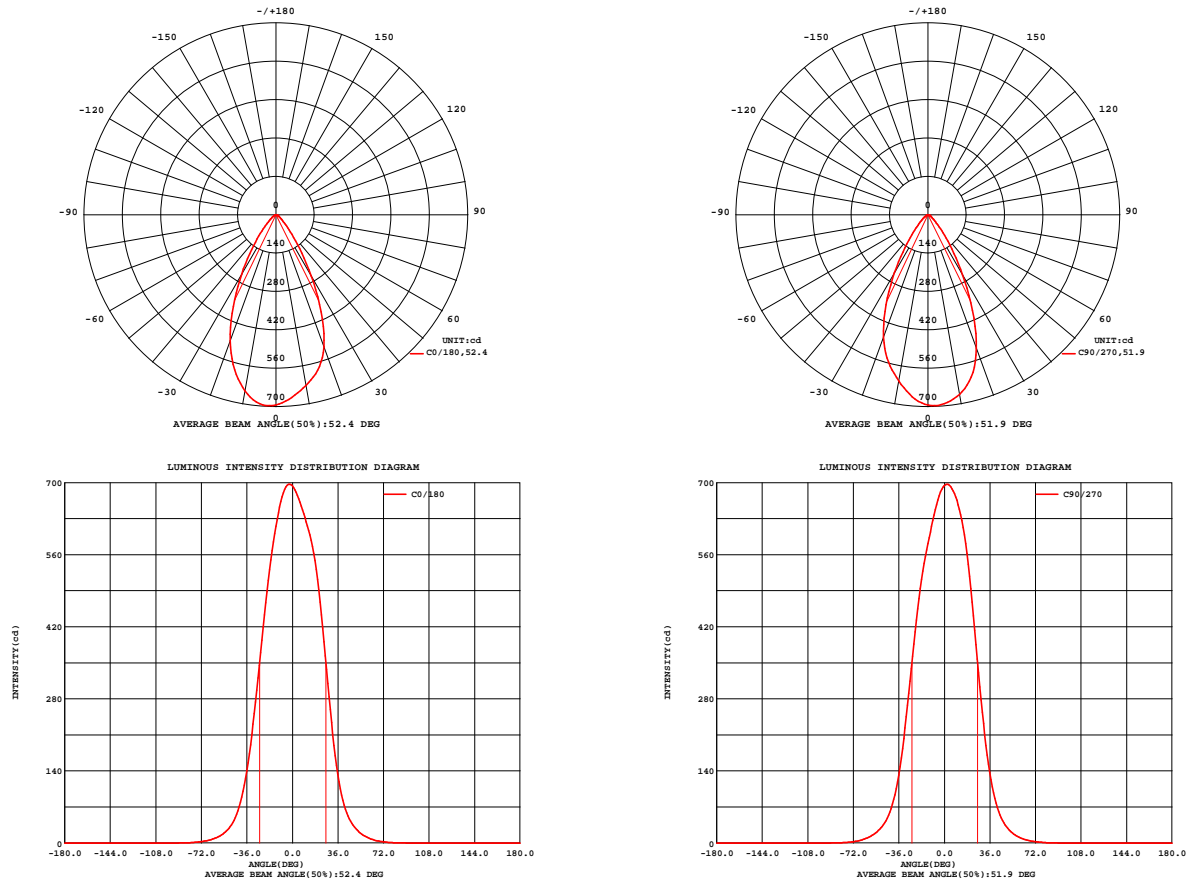


Fig. C0/C180

Fig. C90/C270

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2026-3-26

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRH-30G0600-A-83 Ra: 90  
LENS: PM-1117C 50R  
DRIVER: LD008D-CU02040 200mA  
30minutes warm-up


## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.15V I:0.0486A P:9.7145W PF:0.9044 Freq:49.99Hz  
Lamp Flux:725.92x1 lm


NAME: 2529.401	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2603260056
MFR.: RISE	SUR.: 0.00101736m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 57.36 lm/W
MODEL	Bridgelux	Imax(cd)	700.6	S/MH(C0/180)	0.80	
NOMINAL POWER(W)	10	LOR(%)	76.8	S/MH(C90/270)	0.79	
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	557.26	$\eta$ UP,DN(C0-180)	0.0,39.2	
NOMINAL FLUX(lm)	725.92	CIE CLASS	DIRECT	$\eta$ UP,DN(C180-360)	0.0,37.5	
LAMPS INSIDE	1	$\eta$ up(%)	0.0	CIBSE SHR NOM	0.75	
TEST VOLTAGE(V)	220	$\eta$ down(%)	76.8	CIBSE SHR MAX	0.85	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

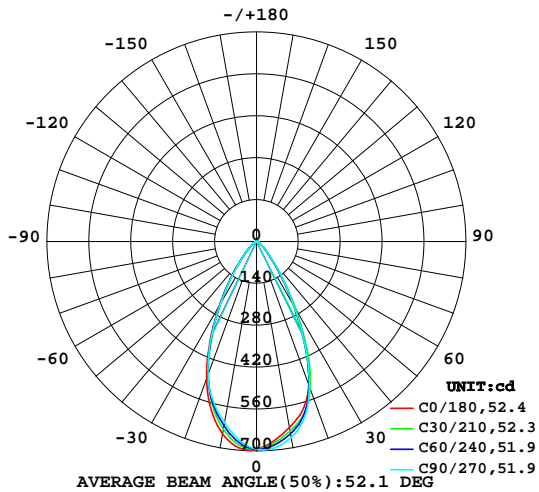

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

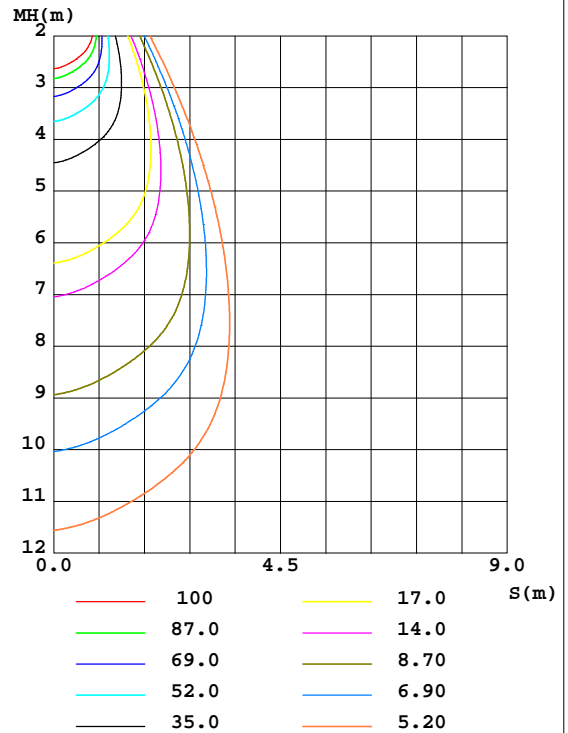

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2026-3-26

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
LENS:PM-1117C 50R  
DRIVER:LD008D-CU02040 200mA  
30minutes warm-up

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	631.9	648.3	665.3	669.2	652.4	631.4	615.4	619.5	0- 10	63.66	63.66	11.4,8.77
20	512.0	519.3	518.4	514.1	488.5	473.7	474.9	486.5	10- 20	162.4	226.1	40.6,31.1
30	258.7	258.2	254.0	257.4	251.5	244.4	245.1	245.4	20- 30	170.5	396.6	71.2,54.6
40	83.30	85.24	86.81	89.59	89.31	86.68	84.79	82.68	30- 40	96.85	493.4	88.5,68
50	28.33	28.52	28.65	28.96	28.56	28.96	29.32	29.50	40- 50	39.28	532.7	95.6,73.4
60	10.02	10.14	10.28	10.53	10.45	10.80	10.95	10.93	50- 60	16.33	549.0	98.5,75.6
70	2.867	2.994	3.280	3.453	3.295	3.300	3.146	3.019	60- 70	6.173	555.2	99.6,76.5
80	0.5714	0.6285	0.7243	0.7848	0.7417	0.7038	0.6274	0.5681	70- 80	1.798	557.0	100,76.7
90	0	0	0	0	0	0	0	0	80- 90	0.2660	557.3	100,76.8
100	0	0	0	0	0	0	0	0	90-100	0	557.3	100,76.8
110	0	0	0	0	0	0	0	0	100-110	0	557.3	100,76.8
120	0	0	0	0	0	0	0	0	110-120	0	557.3	100,76.8
130	0	0	0	0	0	0	0	0	120-130	0	557.3	100,76.8
140	0	0	0	0	0	0	0	0	130-140	0	557.3	100,76.8
150	0	0	0	0	0	0	0	0	140-150	0	557.3	100,76.8
160	0	0	0	0	0	0	0	0	150-160	0	557.3	100,76.8
170	0	0	0	0	0	0	0	0	160-170	0	557.3	100,76.8
180	0	0	0	0	0	0	0	0	170-180	0	557.3	100,76.8
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:zoe  
 Test Date:2026-3-26

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:3.160m [K=1.0000]  
 Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
 LENS:PM-1117C 50R  
 DRIVER:LD008D-CU02040 200mA  
 30minutes warm-up

### LUMINANCE LIMITATION CURVES

Test:U:220.15V I:0.0486A P:9.7145W PF:0.9044 Freq:49.99Hz  
Lamp Flux:725.92x1 lm

NAME: 2529.401

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2603260056

MFR.: RISE

SUR.: 0.00101736m2

Shielding Angle:

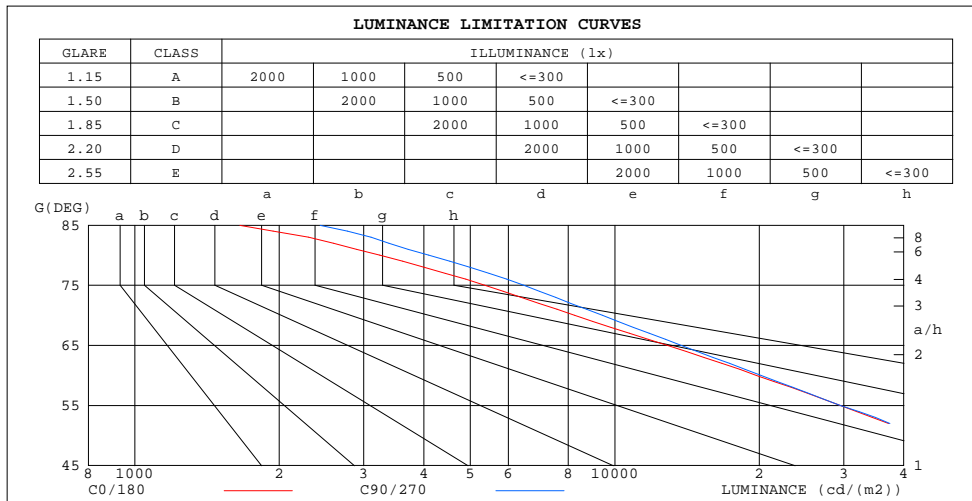

LUMINANCE cd/(m2)		
G(180)	G(270)	a/h
85	2434	8
80	4096	6
75	6458	4
70	9418	3
65	13756	2
60	20188	1.5
55	29542	1
50	43381	0.75
45	67842	0.5

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2026-3-26


γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
LENS:PM-1117C 50R  
DRIVER:LD008D-CU02040 200mA  
30minutes warm-up

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.15V I:0.0486A P:9.7145W PF:0.9044 Freq:49.99Hz  
Lamp Flux:725.92x1 lm

NAME: 2529.401	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2603260056
MFR.: RISE	SUR.: 0.00101736m2	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

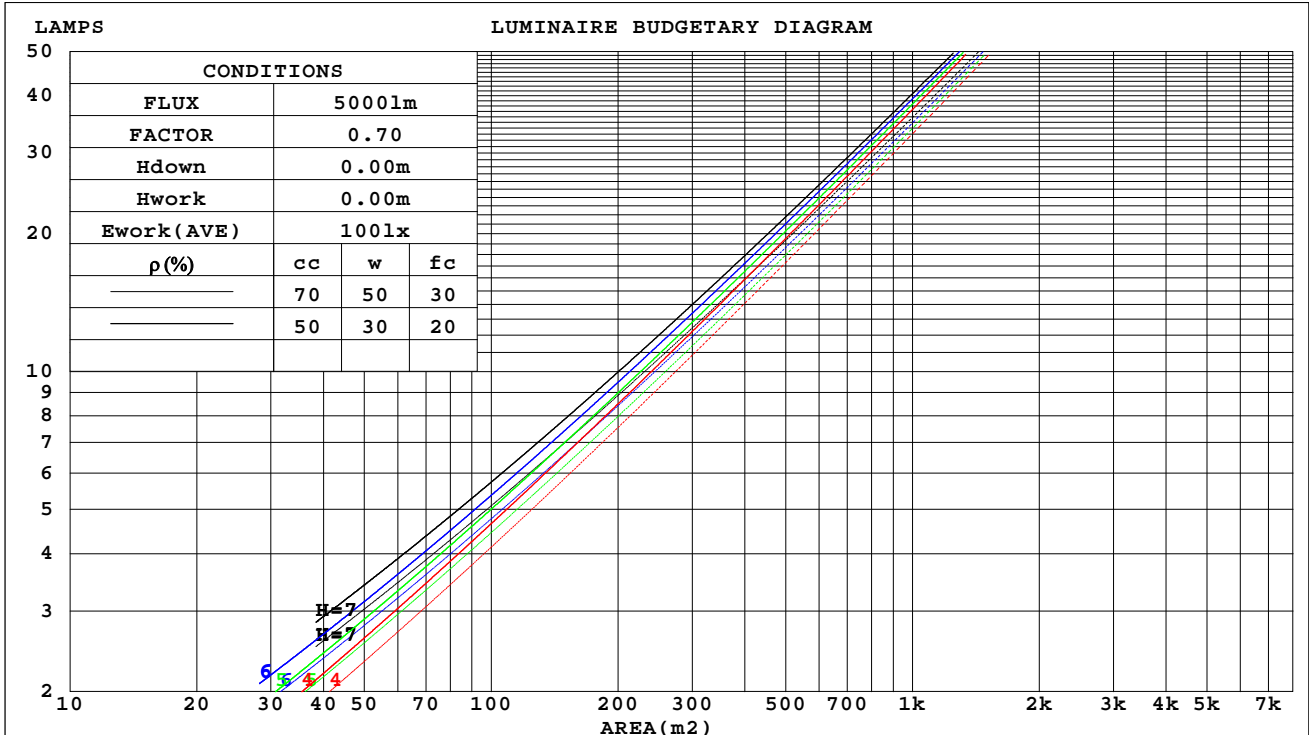

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2026-3-26

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
LENS:PM-1117C 50R  
DRIVER:LD008D-CU02040 200mA  
30minutes warm-up

### WEC AND CCEC

Test:U:220.15V I:0.0486A P:9.7145W PF:0.9044 Freq:49.99Hz Lamp Flux:725.92x1 lm		
NAME: 2529.401	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2603260056
MFR.: RISE	SUR.: 0.00101736m2	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.140	.079	.025	.135	.077	.024	.125	.072	.023	.116	.067	.021	.108	.062	.020	
2.0	.134	.073	.023	.130	.071	.022	.122	.068	.021	.114	.064	.020	.107	.061	.019	
3.0	.128	.068	.020	.124	.066	.020	.117	.063	.019	.110	.061	.019	.104	.058	.018	
4.0	.121	.063	.019	.118	.062	.018	.112	.059	.018	.106	.057	.017	.101	.055	.017	
5.0	.115	.059	.017	.113	.058	.017	.107	.056	.016	.102	.054	.016	.098	.052	.016	
6.0	.110	.055	.016	.107	.054	.016	.103	.053	.015	.098	.051	.015	.094	.050	.015	
7.0	.105	.052	.015	.103	.051	.015	.099	.050	.014	.095	.049	.014	.091	.047	.014	
8.0	.100	.049	.014	.098	.048	.014	.094	.047	.013	.091	.046	.013	.088	.045	.013	
9.0	.096	.046	.013	.094	.046	.013	.091	.045	.013	.088	.044	.013	.085	.043	.012	
10.0	.092	.044	.012	.090	.044	.012	.087	.043	.012	.084	.042	.012	.082	.041	.012	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.146	.146	.146	.125	.125	.125	.085	.085	.085	.049	.049	.049	.016	.016	.016	
1.0	.132	.121	.111	.113	.104	.095	.077	.071	.066	.044	.041	.038	.014	.013	.012	
2.0	.120	.102	.086	.103	.088	.074	.071	.061	.052	.041	.035	.030	.013	.011	.010	
3.0	.111	.087	.068	.095	.075	.059	.065	.052	.042	.038	.031	.024	.012	.010	.008	
4.0	.103	.076	.055	.089	.066	.048	.061	.046	.034	.035	.027	.020	.011	.009	.007	
5.0	.097	.067	.045	.083	.058	.039	.057	.041	.028	.033	.024	.017	.011	.008	.005	
6.0	.091	.060	.038	.078	.052	.033	.054	.036	.023	.031	.021	.014	.010	.007	.005	
7.0	.086	.054	.032	.074	.047	.028	.051	.033	.020	.030	.019	.012	.010	.006	.004	
8.0	.081	.049	.027	.070	.043	.024	.049	.030	.017	.028	.018	.010	.009	.006	.003	
9.0	.078	.045	.024	.067	.039	.021	.046	.028	.015	.027	.016	.009	.009	.005	.003	
10.0	.074	.042	.021	.064	.037	.018	.044	.026	.013	.026	.015	.008	.008	.005	.003	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2026-3-26

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
LENS:PM-1117C 50R  
DRIVER:LD008D-CU02040 200mA  
30minutes warm-up

## UGR(Unified Glare Rating) Table

Test:U:220.15V I:0.0486A P:9.7145W PF:0.9044 Freq:49.99Hz Lamp Flux:725.92x1 lm										
NAME: 2529.401			TYPE:			WEIGHT:				
SPEC.: 3000K			DIM.:			SERIAL No.: 2603260056				
MFR.: RISE			SUR.: 0.00101736m2			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.6	24.6	23.9	24.8	24.9	23.5	24.5	23.8	24.7	24.9
3H	23.6	24.4	23.8	24.7	24.9	23.5	24.4	23.8	24.6	24.8
4H	23.5	24.3	23.8	24.6	24.8	23.4	24.3	23.7	24.5	24.7
6H	23.4	24.2	23.7	24.4	24.7	23.4	24.1	23.7	24.4	24.6
8H	23.4	24.1	23.7	24.4	24.6	23.3	24.1	23.6	24.3	24.6
12H	23.3	24.1	23.6	24.3	24.6	23.3	24.0	23.6	24.3	24.5
4H 2H	23.5	24.3	23.8	24.6	24.8	23.4	24.3	23.7	24.5	24.7
3H	23.4	24.2	23.8	24.4	24.7	23.4	24.1	23.7	24.4	24.7
4H	23.4	24.0	23.7	24.3	24.6	23.3	24.0	23.7	24.3	24.6
6H	23.3	23.9	23.7	24.2	24.6	23.3	23.8	23.6	24.2	24.5
8H	23.3	23.8	23.7	24.1	24.5	23.2	23.8	23.6	24.1	24.5
12H	23.2	23.7	23.6	24.1	24.5	23.2	23.7	23.6	24.0	24.4
8H 4H	23.3	23.8	23.7	24.1	24.5	23.2	23.7	23.6	24.1	24.5
6H	23.2	23.6	23.6	24.0	24.4	23.1	23.6	23.6	24.0	24.4
8H	23.1	23.5	23.6	23.9	24.4	23.1	23.5	23.5	23.9	24.3
12H	23.1	23.4	23.6	23.9	24.3	23.0	23.4	23.5	23.8	24.3
12H 4H	23.2	23.7	23.6	24.1	24.5	23.2	23.6	23.6	24.0	24.4
6H	23.1	23.5	23.6	23.9	24.4	23.1	23.5	23.5	23.9	24.3
8H	23.1	23.4	23.6	23.9	24.3	23.0	23.4	23.5	23.8	24.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.3 / - 4.4					+ 2.4 / - 4.3				
1.5H	+ 3.6 / - 3.1					+ 3.7 / - 3.2				
2.0H	+ 3.6 / - 3.8					+ 3.8 / - 3.7				

CIE Pub.117, 725.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.1)  
Area: 0.00101736 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2026-3-26

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
LENS:PM-1117C 50R  
DRIVER:LD008D-CU02040 200mA  
30minutes warm-up



### UTILIZATION FACTORS TABLE

Test:U:220.15V I:0.0486A P:9.7145W PF:0.9044 Freq:49.99Hz Lamp Flux:725.92x1 lm		
NAME: 2529.401	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2603260056
MFR.: RISE	SUR.: 0.00101736m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	65	59	56	64	59	56	64	59	56	53
0.80	71	66	63	70	66	63	69	65	62	59
1.00	75	70	67	74	70	67	73	70	66	63
1.25	78	74	71	77	73	71	76	72	70	67
1.50	80	76	74	79	76	73	78	75	72	69
2.00	83	79	77	82	78	76	79	77	75	71
2.50	84	81	78	83	80	78	80	78	76	72
3.00	85	83	80	84	81	79	81	79	78	73
4.00	87	85	83	85	83	82	83	81	80	74
5.00	88	86	85	86	85	83	83	82	81	75
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2026-3-26

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
LENS:PM-1117C 50R  
DRIVER:LD008D-CU02040 200mA  
30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:220.15V I:0.0486A P:9.7145W PF:0.9044 Freq:49.99Hz Lamp Flux:725.92x1 lm		
NAME: 2529.401	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2603260056
MFR.: RISE	SUR.: 0.00101736m2	Shielding Angle:

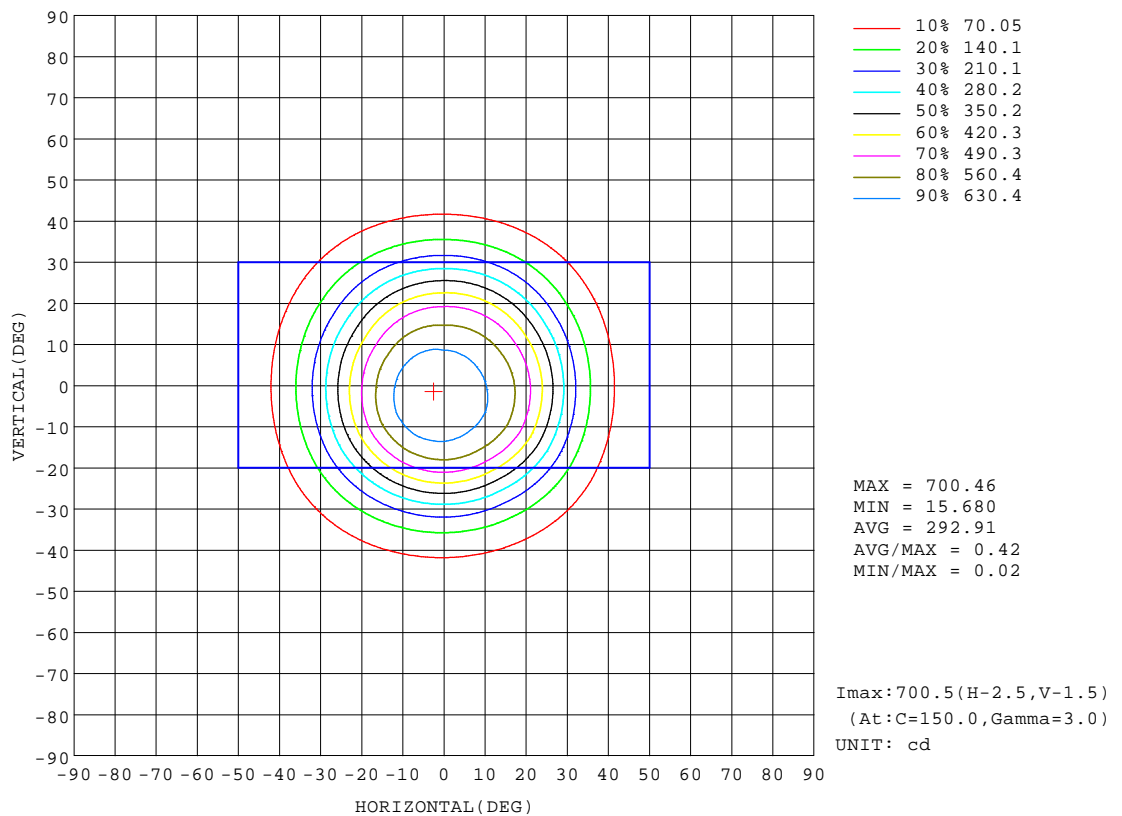


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2026-3-26

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRH-30G0600-A-83 Ra: 90  
LENS: PM-1117C 50R  
DRIVER: LD008D-CU02040 200mA  
30minutes warm-up

### AAI Figure

Test:U:220.15V I:0.0486A P:9.7145W PF:0.9044 Freq:49.99Hz Lamp Flux:725.92x1 lm		
NAME: 2529.401	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2603260056
MFR.: RISE	SUR.: 0.00101736m2	Shielding Angle:

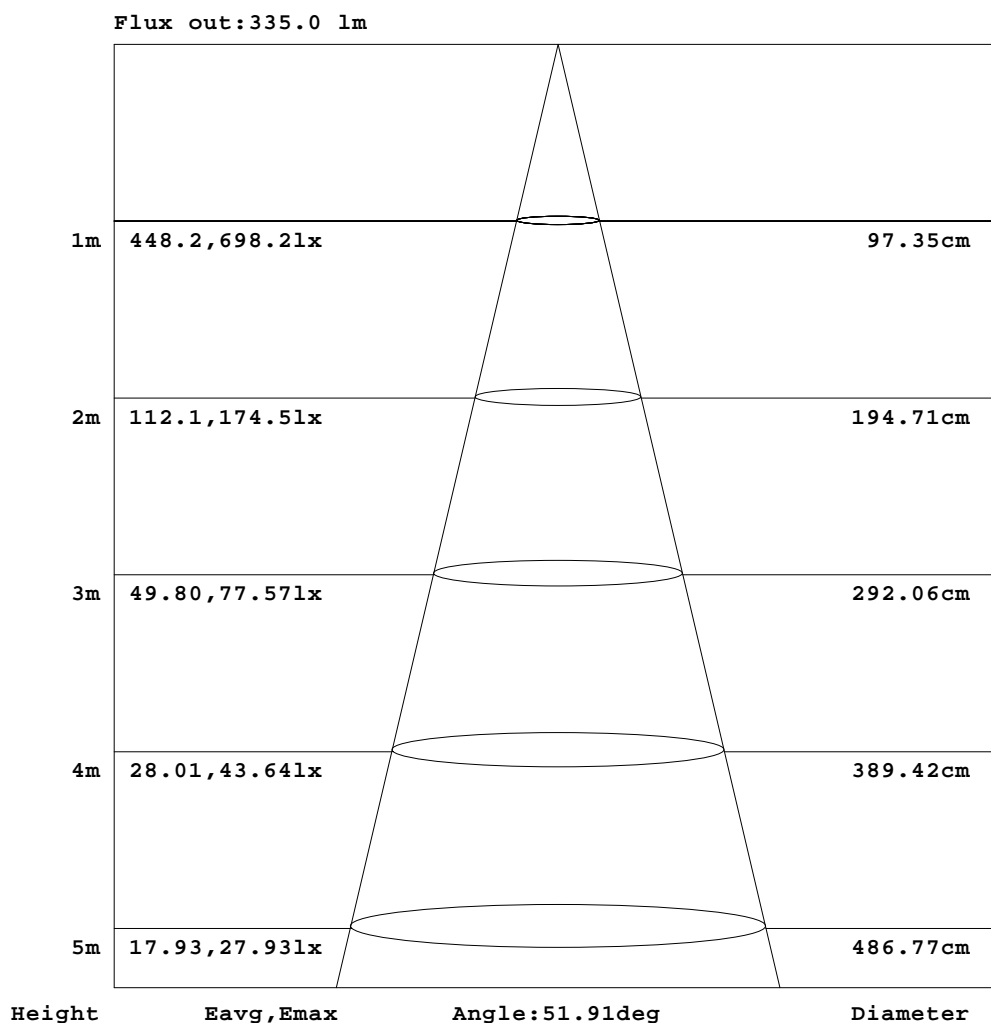


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2026-3-26

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRH-30G0600-A-83 Ra: 90  
LENS: PM-1117C 50R  
DRIVER: LD008D-CU02040 200mA  
30minutes warm-up

## ISOLUX DIAGRAM

Test:U:220.15V I:0.0486A P:9.7145W PF:0.9044 Freq:49.99Hz Lamp Flux:725.92x1 lm		
NAME: 2529.401	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2603260056
MFR.: RISE	SUR.: 0.00101736m2	Shielding Angle:

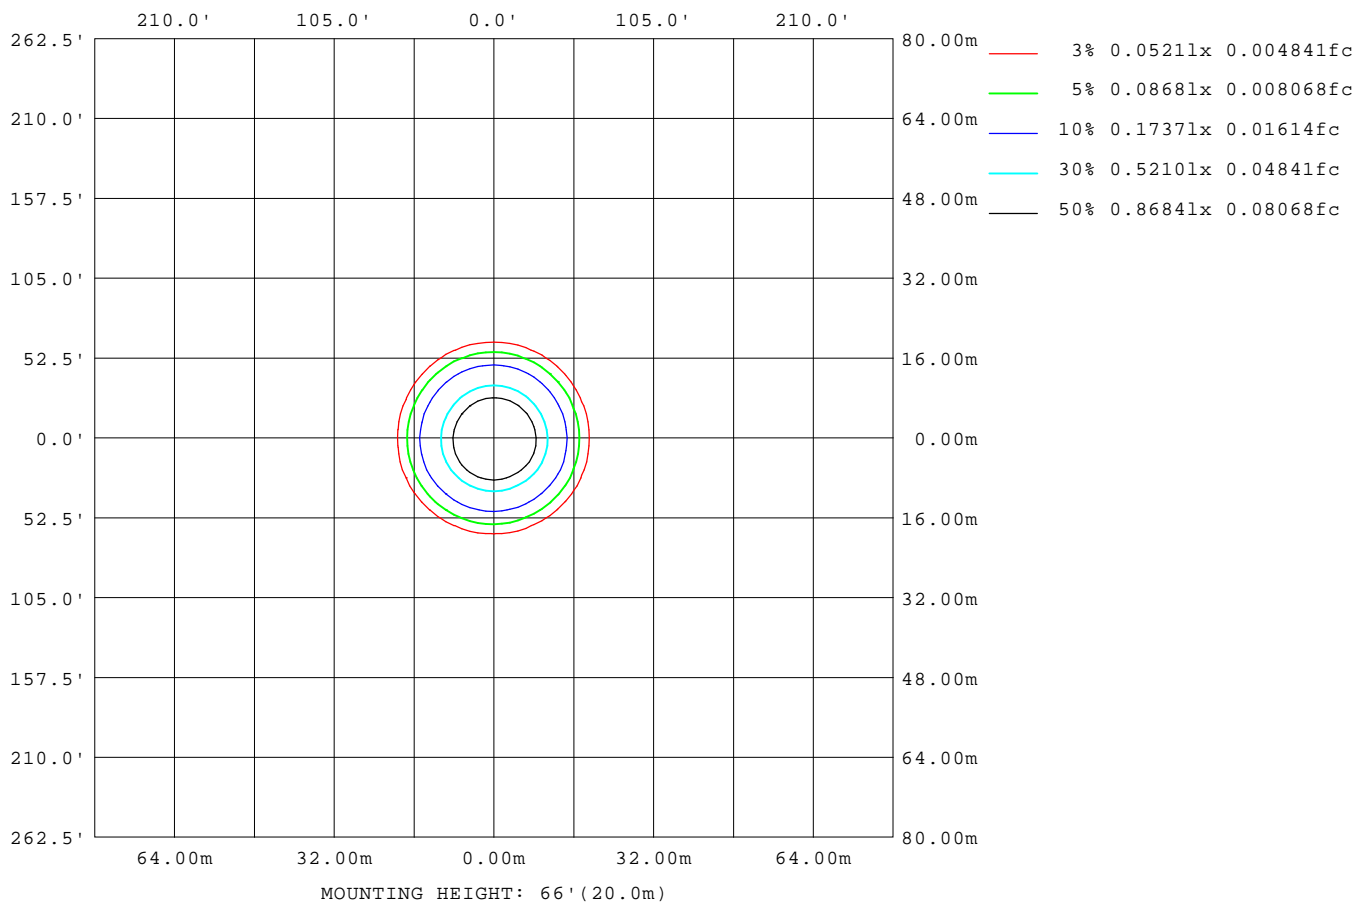

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3 °C  
Operators:zoe  
Test Date:2026-3-26

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
LENS:PM-1117C 50R  
DRIVER:LD008D-CU02040 200mA  
30minutes warm-up

## LED Avg.L Report

Test:U:220.15V I:0.0486A P:9.7145W PF:0.9044 Freq:49.99Hz Lamp Flux:725.92x1 lm		
NAME: 2529.401	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2603260056
MFR.: RISE	SUR.: 0.00101736m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	13439
L_0~180(75)av	5895
L_0~180(85)av	2134
L_90~270(65)av	13958
L_90~270(75)av	6178
L_90~270(85)av	2183
L_45(65)av	13948
L_45(75)av	6131
L_45(85)av	2167

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2026-3-26

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
LENS:PM-1117C 50R  
DRIVER:LD008D-CU02040 200mA  
30minutes warm-up

## Planar Illuminance Curve

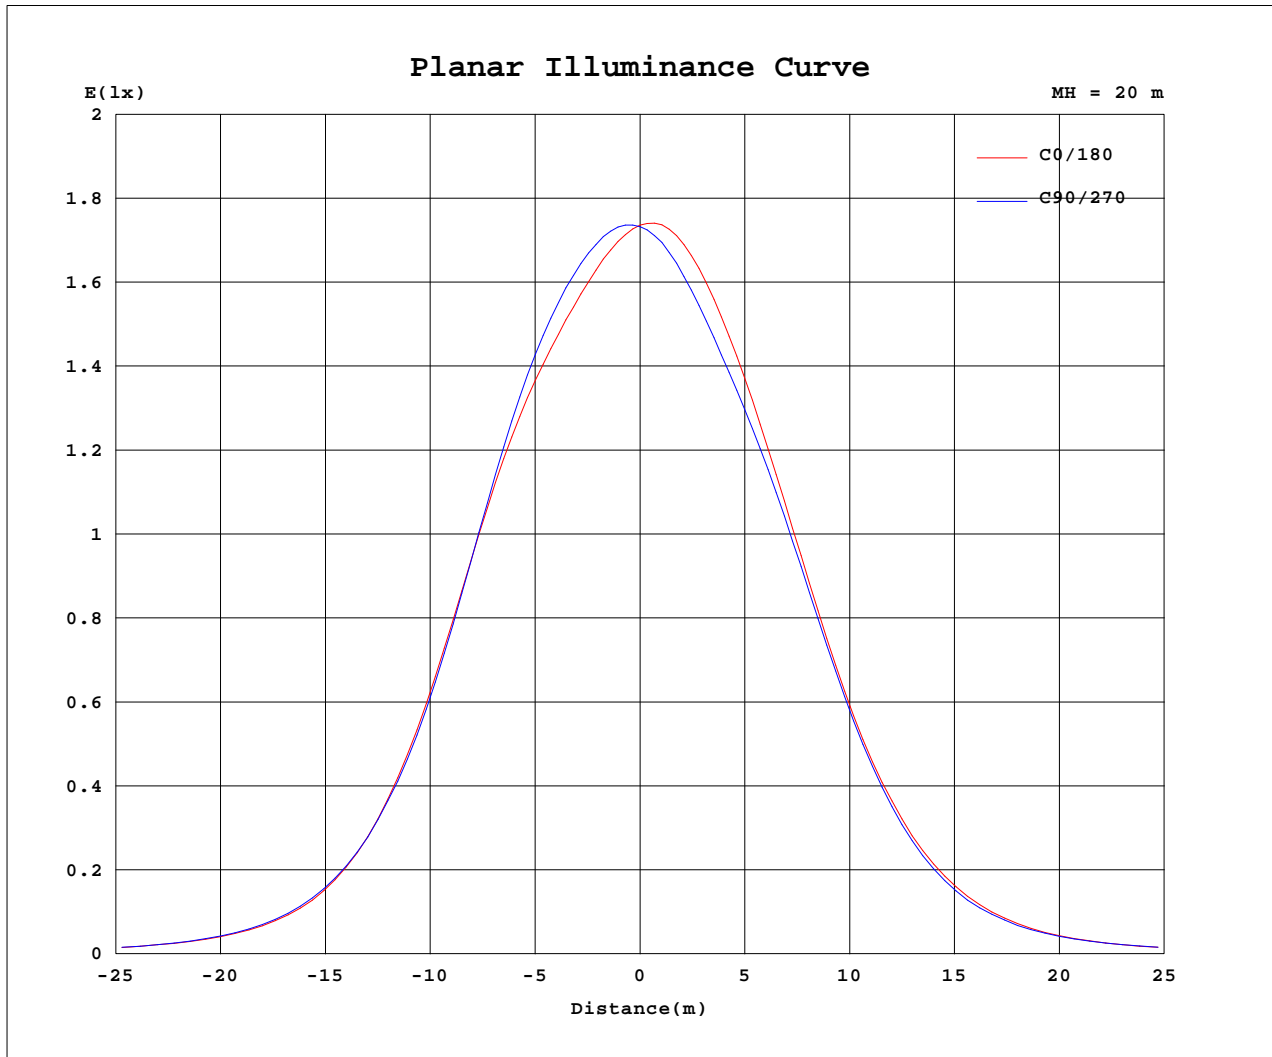

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators: zoe  
 Test Date: 2026-3-26

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: BXRH-30G0600-A-83 Ra: 90  
 LENS: PM-1117C 50R  
 DRIVER: LD008D-CU02040 200mA  
 30minutes warm-up



## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.15V I:0.0486A P:9.7145W PF:0.9044 Freq:49.99Hz Lamp Flux:725.92x1 lm		
NAME: 2529.401	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2603260056
MFR.: RISE	SUR.: 0.00101736m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	694	694	694	694	694	694	694	694	694	694	694	694						
5	669	676	683	692	697	699	692	683	674	666	664	665						
10	632	644	653	665	671	668	652	637	625	615	617	622						
15	588	602	604	613	615	607	585	568	563	556	562	572						
20	512	525	514	518	518	511	489	472	475	475	482	491						
25	391	401	383	385	386	384	369	356	362	363	367	372						
30	259	266	251	254	256	259	251	243	246	245	246	245						
35	151	156	149	153	155	159	156	150	151	148	147	145						
40	83.3	85.7	84.8	86.8	89.0	90.2	89.3	87.2	86.2	84.8	82.8	82.5						
45	47.1	48.3	47.7	48.8	49.5	50.0	49.5	48.5	49.0	48.2	48.2	47.4						
50	28.3	28.8	28.2	28.6	28.9	29.0	28.6	28.6	29.3	29.3	29.8	29.2						
55	17.2	17.4	17.1	17.3	17.5	17.5	17.3	17.6	18.3	18.3	18.8	18.1						
60	10.0	10.2	10.1	10.3	10.5	10.5	10.4	10.7	11.0	10.9	11.2	10.7						
65	5.52	5.62	5.65	5.92	6.18	6.16	6.03	6.15	6.21	6.08	6.06	5.84						
70	2.87	2.94	3.04	3.28	3.48	3.42	3.30	3.32	3.28	3.15	3.08	2.95						
75	1.41	1.48	1.55	1.70	1.82	1.79	1.69	1.68	1.65	1.55	1.50	1.43						
80	0.57	0.61	0.65	0.72	0.78	0.79	0.74	0.72	0.69	0.63	0.58	0.56						
85	0.15	0.17	0.19	0.22	0.24	0.25	0.23	0.21	0.20	0.17	0.15	0.14						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2026-3-26

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G0600-A-83 Ra:90  
LENS:PM-1117C 50R  
DRIVER:LD008D-CU02040 200mA  
30minutes warm-up