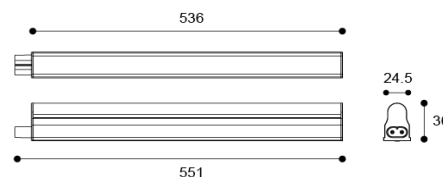


STICK-LINE-FF

Product specification

**INTERIOR LED LINEAR LIGHT**

Installation	Wall mounted
Cut out	-
Dimension	L=551mm W=24.5mm H=36mm

**Technical description**

Article number	1610.003B-FF	
LED Consumption	9W	
Current	-	
CCT	3000K	4000K
Lumen ^{*1}	760lm	800lm
Øsystem ^{*3}	-	-
Voltage	100-240Vac	
Reflector	120°	
CRI	80+	
Driver	Built-in, I/P : 100-240VAC 50/60 HZ O/P : 212mA	

Technical character

Insulation	CLASS II
Protection	IP 20
Tilt	-
Rotate	-
Operating temperature	-20~40 °C
Average Failure Time	L70(6k) >36000 (h)

Materials

Luminaire	aluminum extruded
	plastic end cap, PC diffuser
Reflector	-
Heat sink	aluminum extruded
Color available	anodized aluminum

Package

inner box	mm 1 kg
outer box	mm 0 kg / 0 in 1

Photometric**Accessories**

VDE Plug cords 180cm , VDE Connection cords 25/50cm

UL Plug cords 180cm , UL Connection cords 25/50cm

Clip & Screws

Remarks

*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture,
this is the real lumen with the loss because of different design of reflectors and fixtures.

